INTERVALS®

Engineered by Design with the Power to Perform

RECESSED DOWNLIGHTS




RECESSED DOWNLIGHTS

SCOPE OF THE SYSTEM

Intervals high-performance recessed downlights are available in four sizes: 1", 2", 3", and 4", with performance capabilities increasing with scale. The light engines, optics, trims, ceiling applications, and housings are all interchangeable within each size providing unparalleled flexibility in the field.

The same sophisticated design and specification-grade performance is available throughout the range, with all sizes offered with multiple round and square trim options in Satin Black, Satin White, and Satin Aluminum trim finishes.











CEILING APPLICATIONS

All three ceiling applications are made of die cast aluminum and work with any of the trim options



with a tapered Feather-Edge™ profile provides a universal solution housing, providing a flush and trim-coordinating finishes of Satin and plaster ceilings with no Black, Satin Aluminum, and field- warping or cracking. Available in paintable Satin White.



field-paintable Satin White finish



Millwork: The millwork collar provides a flangeless appearance in wood or stone ceilings. for all ceiling types. Available in seamless appearance in gypsum Available in field-paintable Satin

FIXED TRIM OPTIONS

All fixed trims work with any of the ceiling application options. Pinhole trims in Satin White and Satin Black have a Satin Black interior, for a low-glare quiet ceiling appearance.





Square Bevel Mud-Ir



2" / 3" / 4"

2" / 3" / 4"

2" / 3" / 4"





1" / 2" / 3" / 4"

•







•















AVAILABLE TRIM FINISHES


1" / 2" / 3" / 4"






©2021 SONNEMAN - A Way of Light







Light Engine

Field-replaceable cold forged aluminum heat sink provides in a compact size.



Field-changeable smooth beam TIR optics offered in 4 beam angles.

Cree LED with high quality

color rendering available in

5 color temperatures.



LED -

Optics -

Electro-coated steel spring wings allow for tool-free installation and in-field servicing in ceiling thickness from 0.5" to 1.5".



Round Decorative Trim

w/ Etched Acrylic Ring

Round Decorative Trim

w/ Etched Acrylic Ring

Die cast aluminum ceiling flange with tapered Feather Edge™, field-changeable to flangeless mud-in or millwork.

DECORATIVE TRIMS 2" & 3"




Round Decorative Trim

w/ Etched Ribbon Glass

Round Decorative Trim

w/ Etched Ribbon Glass

patent pending connection to the light engine provide inherently airtight fixtures with high efficiency.



excellent thermal performance

Optical Accessories

Up to two optical accessories can be used without any extra holder to further refine lighting effects.

Trims

Die cast aluminum trims with

Round Decorative Trim

w/ Clear Ribbon Glass


Round Decorative Trim

w/ Clear Ribbon Glass



2", 3", 4" ADJUSTABLE





Field-replaceable cold forged aluminum heat sink provides excellent thermal performance in a compact size.

Cree LED with high quality color rendering available in 5 color temperatures.

Field-changeable smooth beam TIR optics offered in 4 beam angles.

Sliding Shade

The patent pending sliding shade design eliminates line-of-sight into the ceiling cavity or housing, regardless of tilt angle.

Flange Ring -

40° TILT

Die cast aluminum ceiling flange with tapered Feather Edge™, field-changeable to flangeless mud-in or millwork.



Trim Cover

Installation

Optical Accessories

Up to two optical accessories can

be used without any extra holder

to further refine lighting effects.

Round adjustable trims feature

stainless steel spring wings that

any position and easy twist-out

Square adjustable trims feature

swing-out screw clamps. Both are

suitable for installation in ceiling

removal for in-field servicing.

thickness from 0.5" to 1.5".

allow for tool-free installation into


The die cast aluminum trim cover is secured with ball catches and provides a beveled appearance in the desired finish, and is removable for adjusting the aiming.





For up-to-date cutsheets with complete specifications and ordering information visit www.sonnemanawayoflight.com





Light Engine

Field-replaceable cold forged aluminum heat sink provides excellent thermal performance in a compact size.

LED

Cree LED with high quality color rendering available in 5 color temperatures.

Optical Accessories

The wall wash trim includes a microprism lens accessory for smooth and even light distribution along the wall.

Die cast aluminum trim with patent pending connection to the light engine provide inherently airtight fixtures with high efficiency.



Optics _

Installation

from 0.5" to 1.5".

Dedicated asymmetric wall

wash optic for optimum

distribution along the wall.

Electro-coated steel spring

servicing in ceiling thickness

wings allow for tool-free

installation and in-field

Die cast aluminum ceiling flange with tapered Feather Edge™, field-changeable to flangeless mud-in or millwork.










Round Decorative Trim

w/ Etched Glass Cylinder

Round Decorative Trim

w/ Etched Glass Cylinder

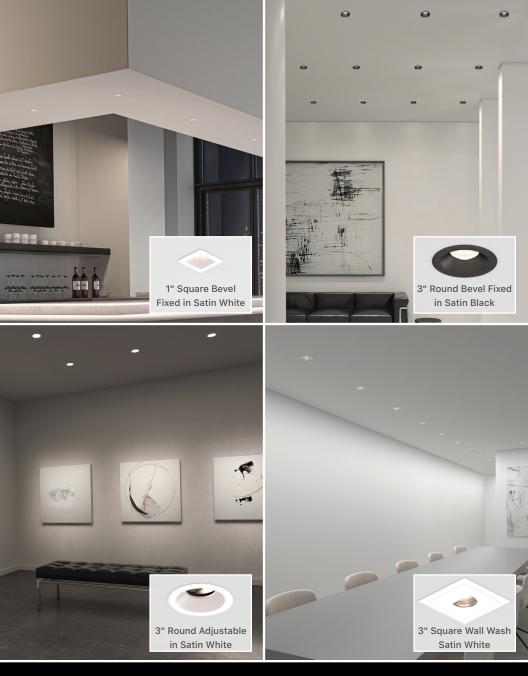

SEE THE LIGHT

AT THE SONNEMAN SHOWROOM | THE NEW YORK DESIGN CENTER | 200 LEXINGTON AVE NYC 10016 DALLAS MARKET CENTER | 2100 STEMMONS FREEWAY, DALLAS, TX 75207, TM 4804 VISIT IN PERSON OR CONTACT US FOR A VIRTUAL MEETING.

www.sonnemanawayoflight.com

©2021 SONNEMAN - A Way of Light