



ADDITIONS 2020


SONNEMAN®
A WAY OF LIGHT

illumination from the art of technology®

Challenged by the possibilities of design innovation, we continue to explore and grow with this expansive introduction of new modern lighting. We drive our vision in the many product applications that we produce in pursuit of our mission to create illumination from the art of technology.

ADDITIONS 2020


product categories

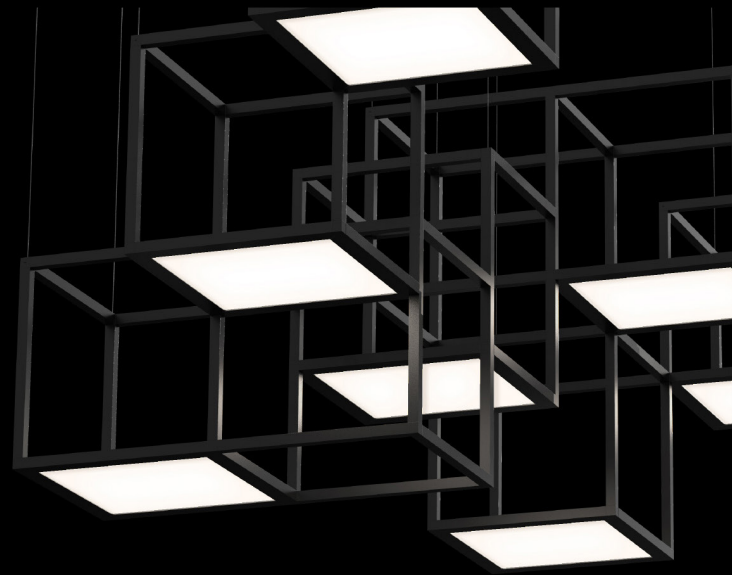

systems

We've greatly expanded our decorative architectural lighting systems. Comprised of modular elements or individual LED lighting sculptures, they have the capability to be interconnected or used in multiples to form scalable works of art with limitless expansion—providing stunning design and world-class illumination to commercial, hospitality, and residential spaces.


◀ pgs. 6-39, 100-105, 124-135

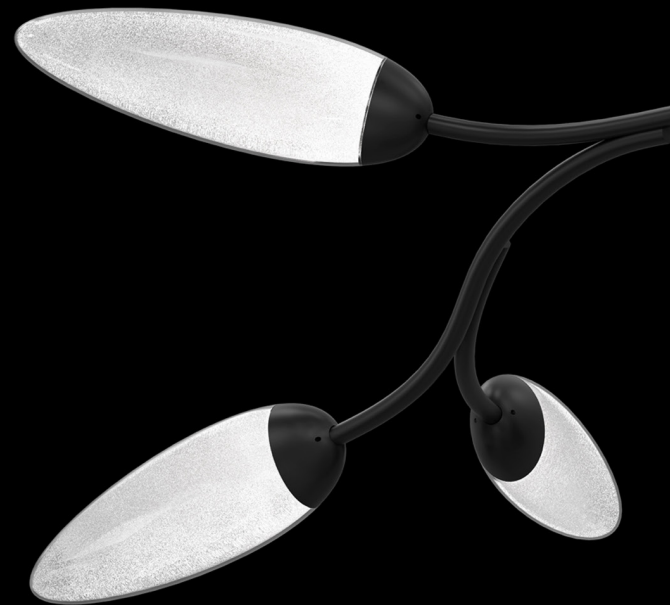

sculptural

Sculptural is a modern style of free-flowing forms that connect functionality with sculptural expression in an original style. Contrasting to the sharp edges and solid geometry of modernism, Sculpturalism acclaims a soft, sensuous, and fluid continuity of shape and form.


◀ pgs. 60-67, 82-89, 106-111

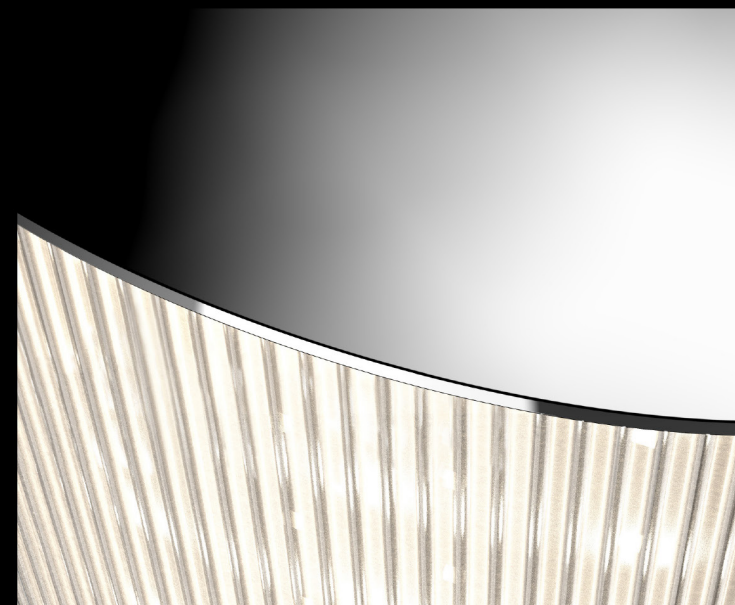

architectural

Architectural is a modern style that refers to minimal, functional, geometric designs as expressions of modern architectural applications.

◀ pgs. 40-59, 90-99, 112-123, 150-163

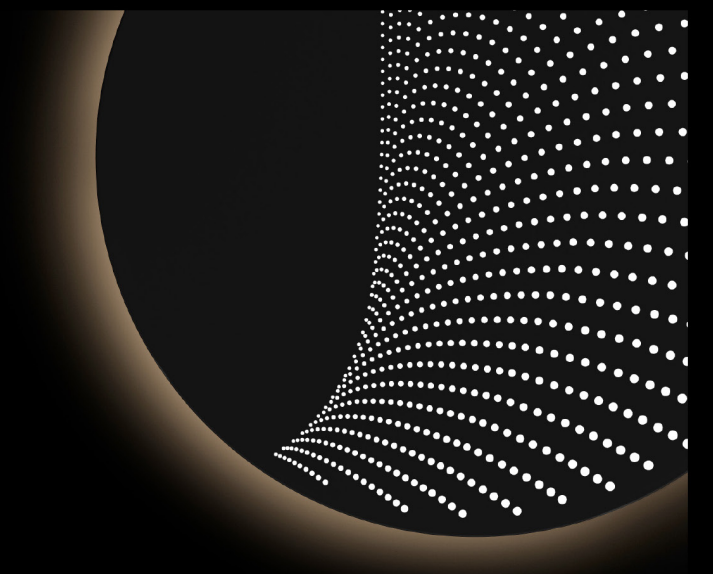

multi-forms

Multi-forms are lighting compositions of multiple elements, often composed of abstract or geometrically shaped glass or metal pendants of single or multiple sizes. Created to be used in a variety of configurations, Multi-form compositions create scalable, dazzling, luminous arrangements of exquisite variety, shape, and size.

◀ pgs. 68-81

bath

Ranging from sleek and minimal to bold and expressive modern designs, our collection of bath bars and sconces brings generous, pristine LED illumination and decorative interest to a luxurious setting.

◀ pgs. 136-149

inside-out®

Our Inside-Out collection relates to the architectural notion of connecting the interior to the exterior of a space, with beautifully executed forms of sculptural presence and simplicity that are equally at home inside or out.

▲ pgs. 164-197



Cubix™	6	Incavo™	174
Constellation®	26	Backgate™	176
Proton™	40	Lighthouse™	178
Nebula™	44	Mezza Vetro™	184
Sabon™	50	Mezza Cupola™	185
Qux™	54	Ovos™	186
Vines™	60	Kengo	188
Parisone™	68	Flue™	190
Friso™	74	Tairu™	192
Meclisse™	78	Dotwave™	194
Movile™	82		
Papillons™	84	Index by Category	198
Tela™	90	Index by Collection	202
Malibu Discs™	96	Index by Item Number	203
Coral Surface™	100	Editorial Close	204
Abstraction™	106		
Aureola™	112		
Torc™	114		
Perfile™	116		
Keel™	118		
Purolinear 360™	124		
Fino™	136		
Gessato™	140		
Radio™	142		
Plaza™	144		
Tuo™	146		
Vanity™	148		
Vuoto™	150		
Zoom™	152		
Ilios™	154		
Offset™	156		
Marue™	160		
Tawa™	166		
Porta™	172		

contents



cubix™

*Cubix is an expansive and scalable
system of interconnected modular
architectural illumination.*




24Z0003


Cubix 12-Light LED Pendant
44 1/2" H x 120 1/2" W x 60 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 1/2" H x 4 1/2" sq
w/6' Adjustable Cord/Cable
Output: 12pcs LED; 148W; 13,800 Lumens
(6,000 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/(2) Remote LED Drivers
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

24Z0003 Satin Black
Shown with optional 20' Cord/Cable

cubix™
modular architectural illumination

Cubix brings scalability, volume, and constructive interest to architectural illumination. Arrayed in precisely interconnected relationships, these suspended cubes are joined to each other by a shared leg on each frame. With each cube set at one of four vertical positions to the next, the construction allows for expansive horizontal and vertical arrays across the plane and height of a space. Each cube can support a horizontal LED light-guide or be left as an open frame, providing the flexibility to configure higher or lower density illumination and scale to a variety of spaces. Cubix brings constructivist context to architectural illumination.

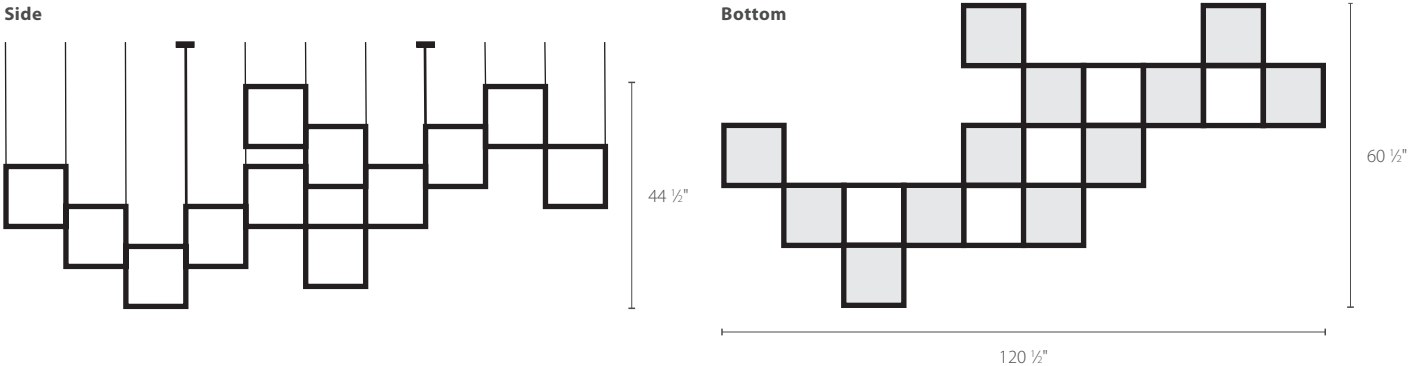

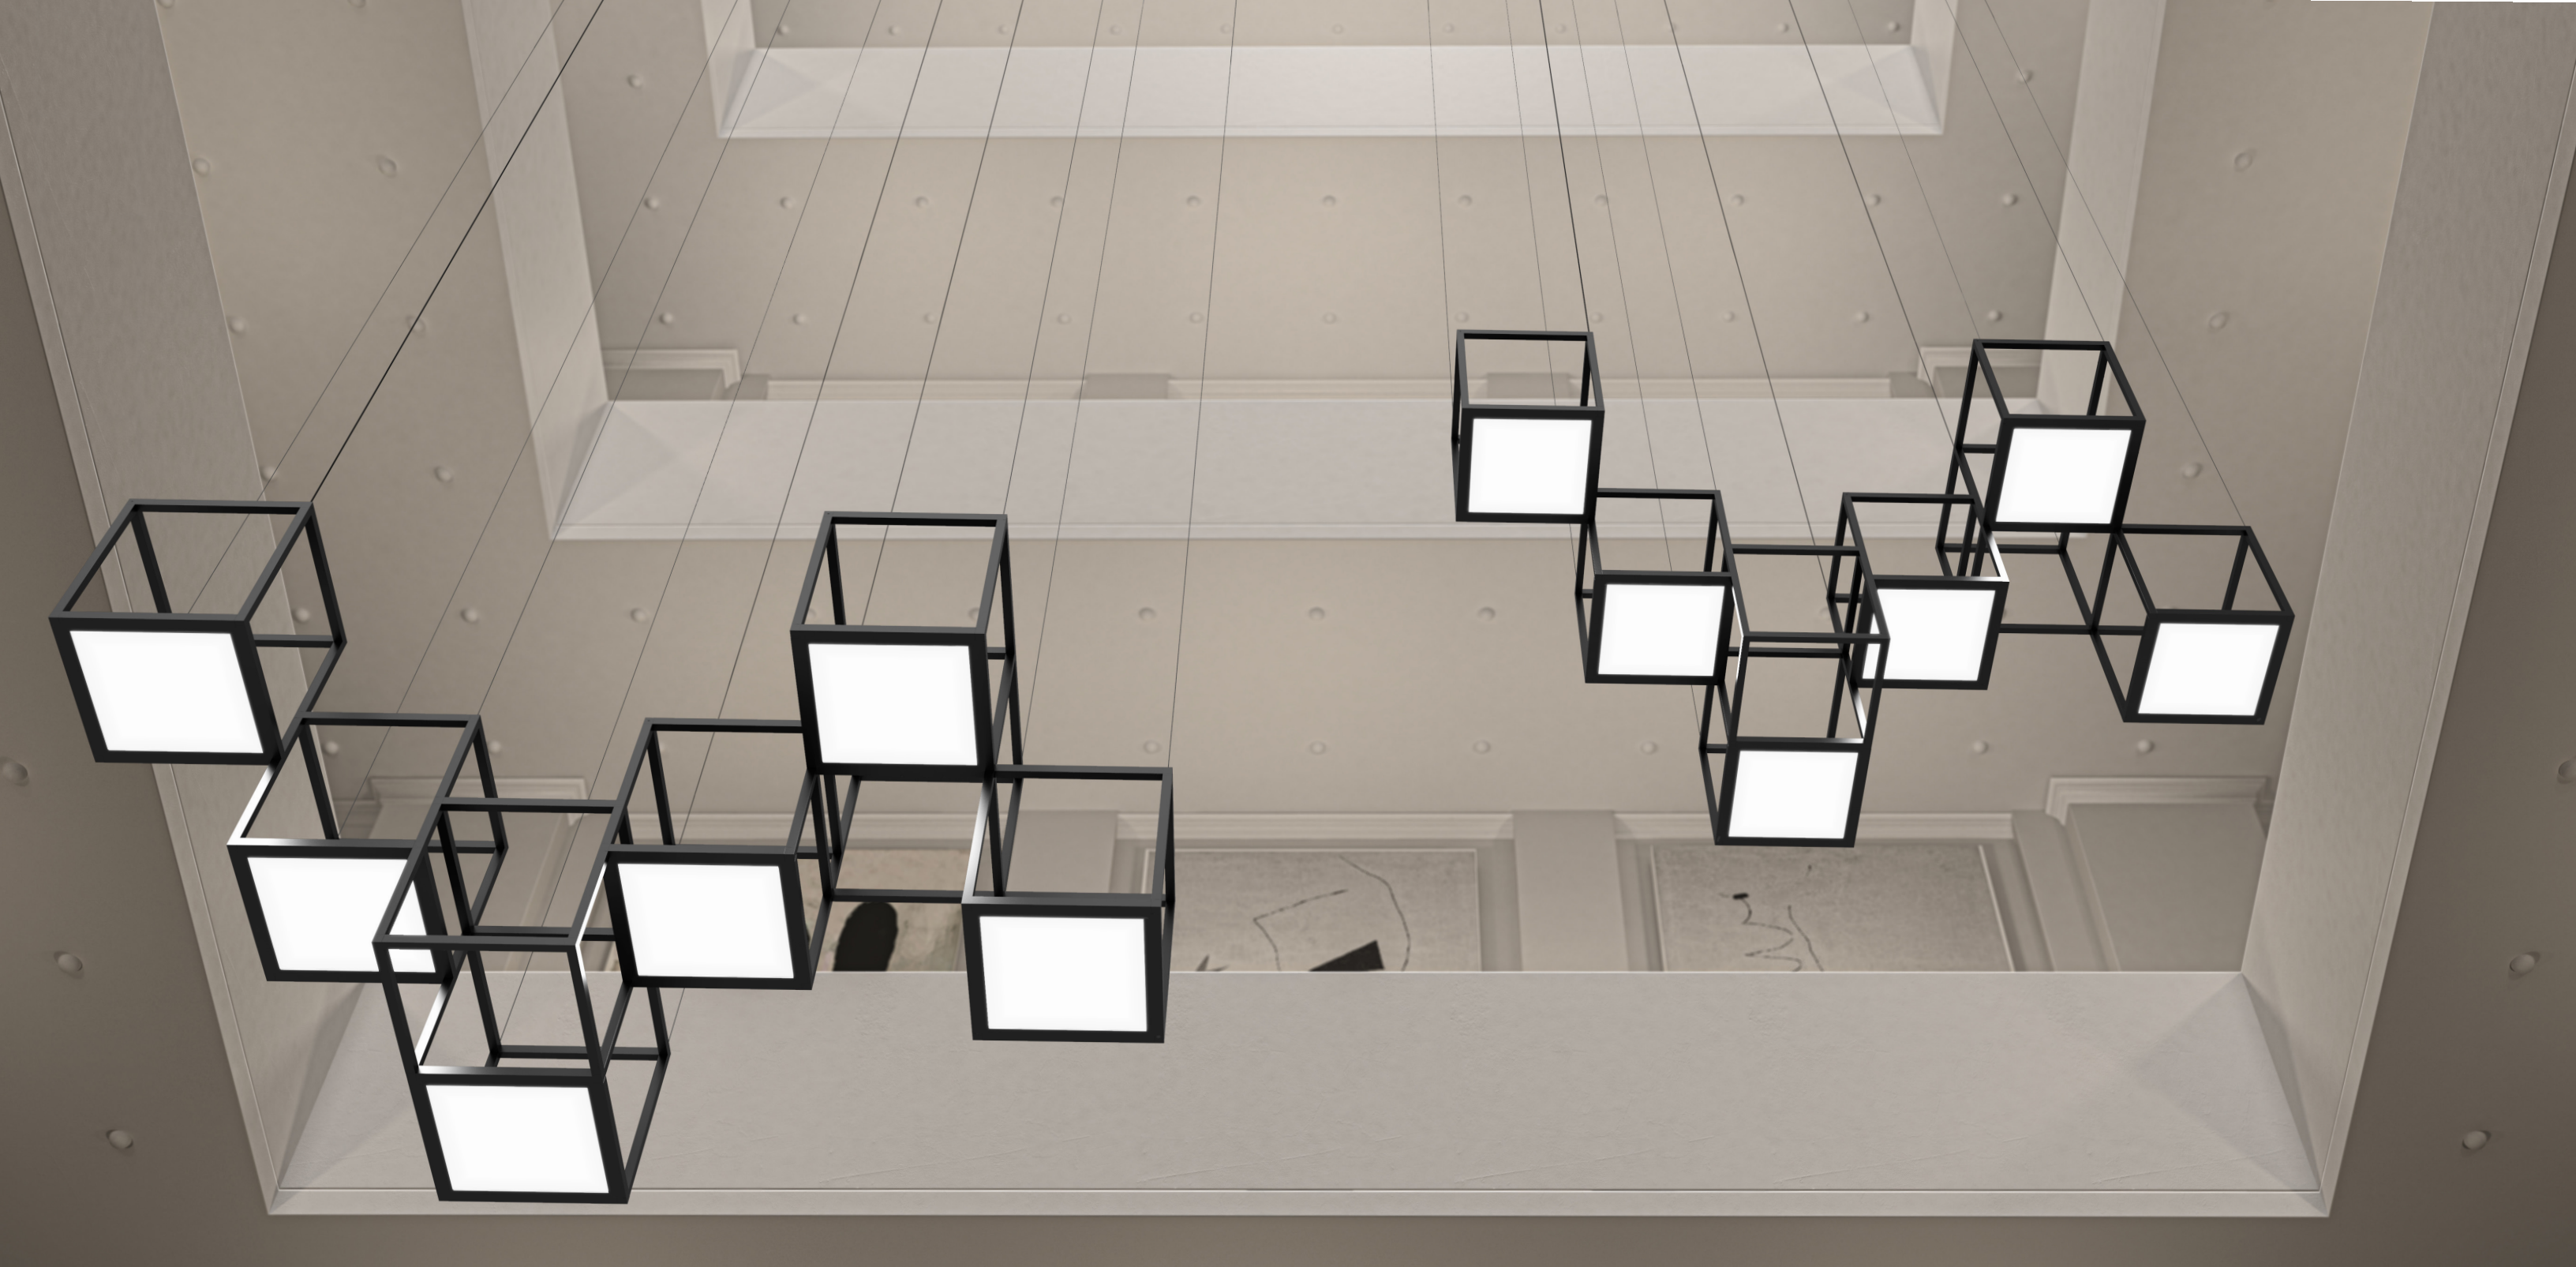

cubix™

modular architectural illumination


24Z0002

Cubix 6-Light LED Pendant


28 ½" H x 72 ½" W x 36 ½" D
 Shade: Aluminum w/LED Flat Panel
 Canopy: ½" H x 4 ½" sq w/6' Adjustable Cord/Cable
 Output: 6pcs LED; 74W; 6,900 Lumens (3,000 Net Lumens);
 Warm White (3000K); 90 CRI
 Input: 100-277VAC w/Remote LED Driver
 Dimming: Electronic Low Voltage (ELV) and
 Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

24Z0002 Satin Black
 Shown with optional 20' Cord/Cable

Side

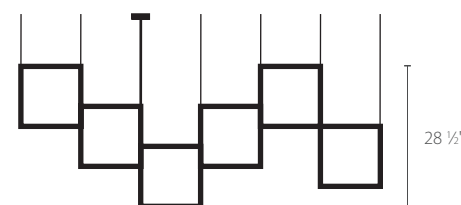

Bottom

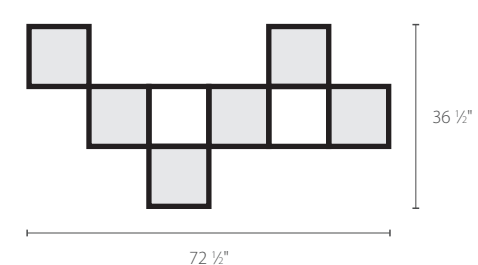



cubix™

modular architectural illumination

Configured in a strong vertical arrangement, Cubix brings layers of illumination and dramatic sculptural presence to high-ceilinged architectural spaces. Scaled in a narrower vertical formation or configured with broader horizontal sections for increased mass, Cubix provides the opportunity to achieve the scale of both height and volume.


24Z0004

Cubix 9-Light Vertical LED Pendant



72 1/2" H x 36 1/2" W x 36 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 1/2" H x 4 1/2" sq w/6' Adjustable Cord/Cable
Output: 9pcs LED; 112W; 10,400 Lumens
(4,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

24Z0004 Satin Black

Side

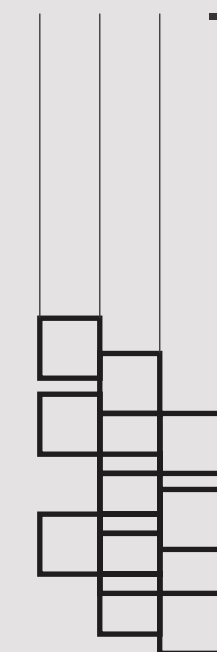

Bottom

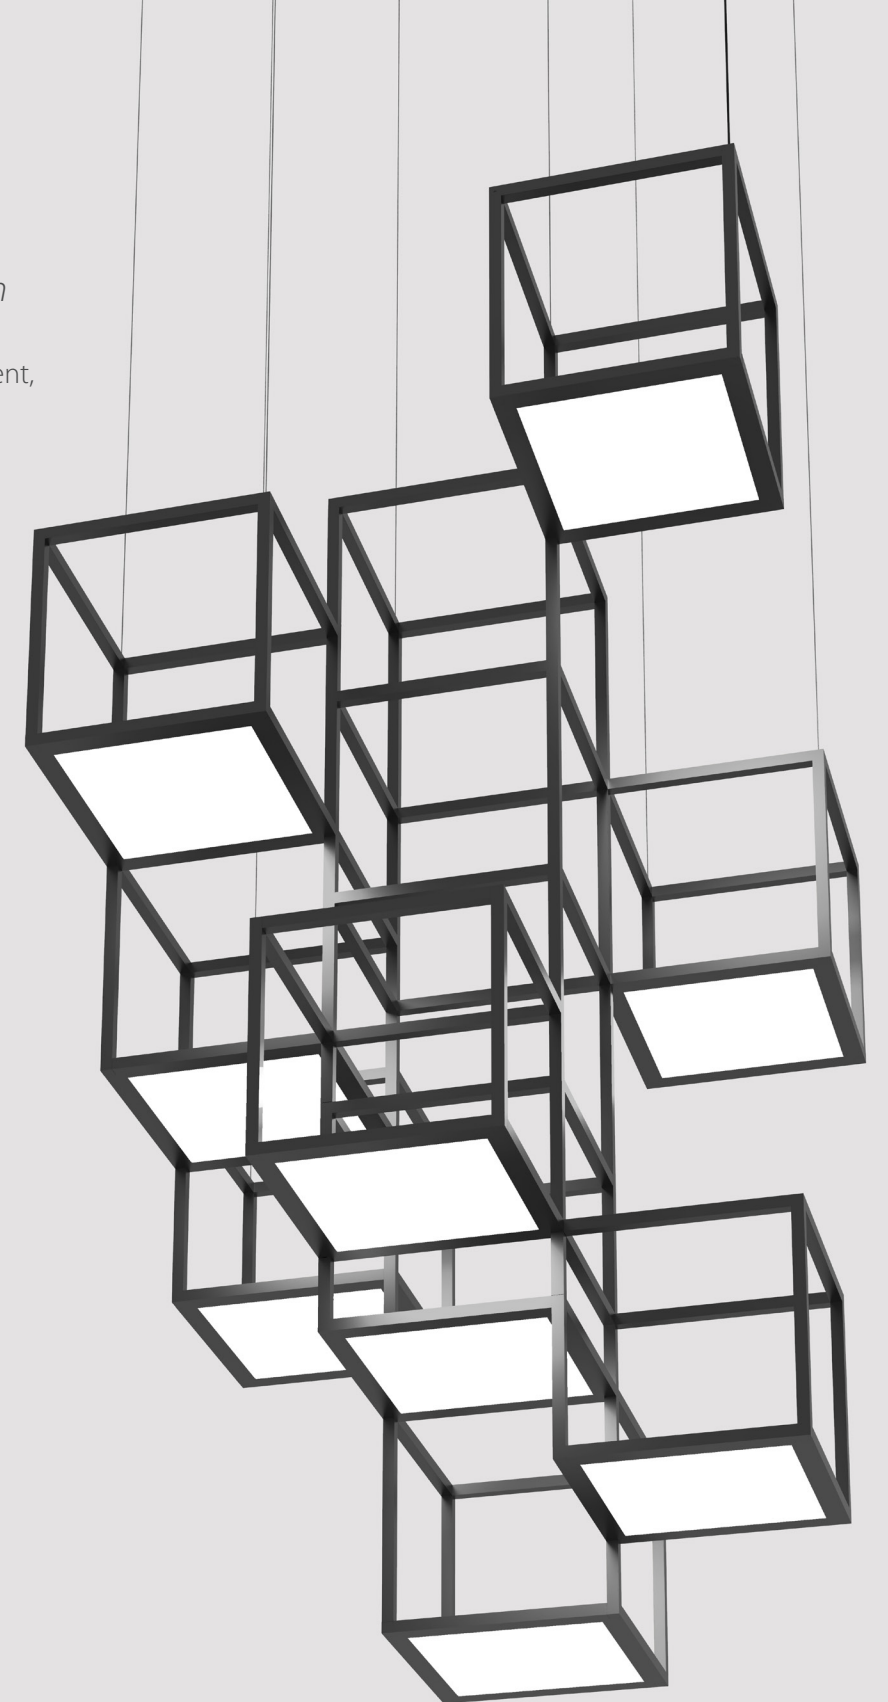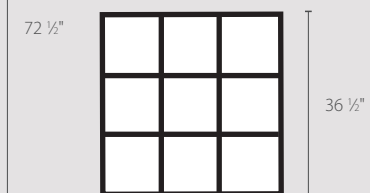

cubix™

modular architectural illumination

24Z0001

Cubix 4-Light LED Pendant

28 ½" H x 48 ½" W x 36 ½" D

Shade: Aluminum w/LED Flat Panel

Canopy: ½" H x 4 ½" sq

w/6' Adjustable Cord/Cable

Output: 4pcs LED; 50W; 4,600 Lumens

(2,000 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/Remote LED Driver


Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent


(at 120VAC only), or 0-10V

24Z0001 Satin Black

Side

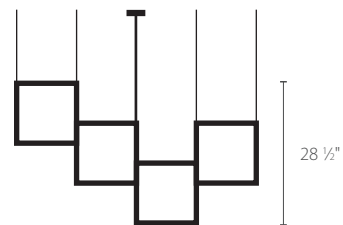


Bottom

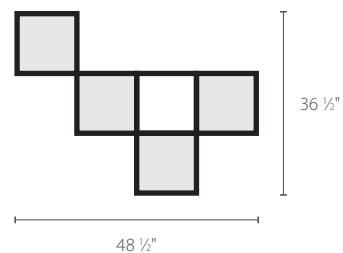

cubix™ configurations

For custom configurations contact our
Contract Sales Team for assistance at
contract@sonneman.com.

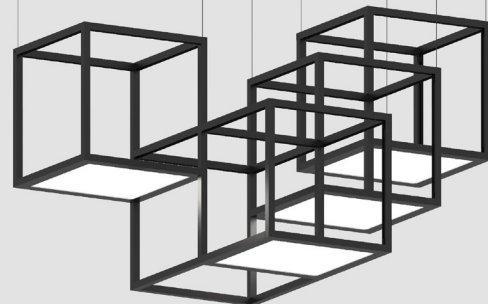


24Z0001

Cubix 4-Light LED Pendant


28 ½" H x 48 ½" W x 36 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ½" H x 4 ½" SQ
w/6' Adjustable Cord/Cable
Output: 4pcs LED; 50W; 4,600 Lumens
(2,000 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

24Z0001 Satin Black

Side



Bottom

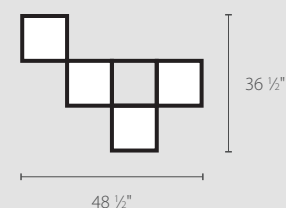


24Z0003

Cubix 12-Light LED Pendant




44 ½" H x 120 ½" W x 60 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ½" H x 4 ½" SQ w/6' Adjustable Cord/Cable
Output: 12pcs LED; 148W; 13,800 Lumens
(6,000 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/(2) Remote LED Drivers
Dimming: Electronic Low Voltage (ELV) and Standard
(TRIAC) Incandescent (at 120VAC only), or 0-10V

24Z0003 Satin Black

Side

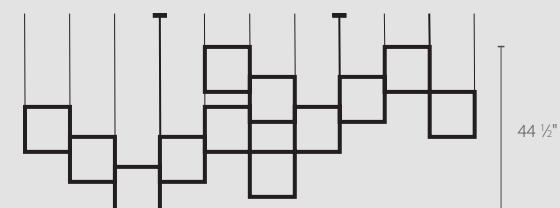

Bottom

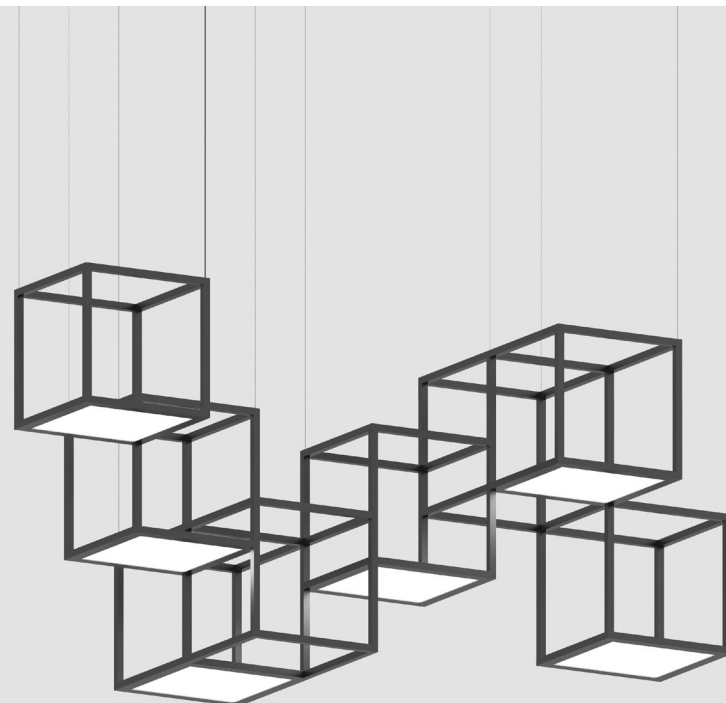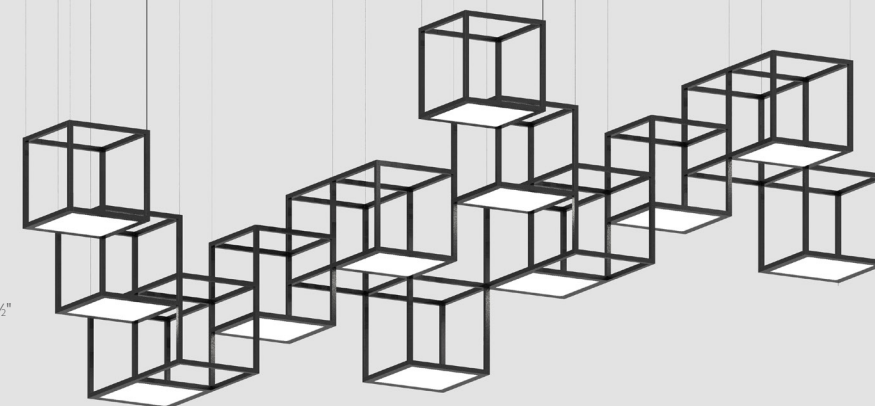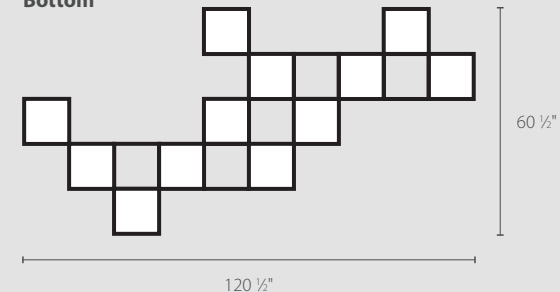


24Z0002

Cubix 6-Light LED Pendant


28 ½" H x 72 ½" W x 36 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ½" H x 4 ½" SQ
w/6' Adjustable Cord/Cable
Output: 6pcs LED; 74W; 6,900 Lumens
(3,000 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

24Z0002 Satin Black

Side

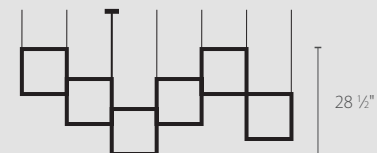

Bottom

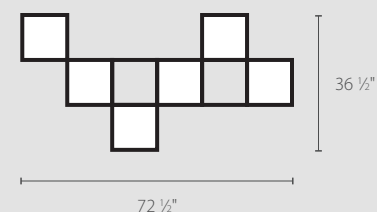


24Z0004

Cubix 9-Light Vertical LED Pendant



72 ½" H x 36 ½" W x 36 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ½" H x 4 ½" SQ
w/6' Adjustable Cord/Cable
Output: 9pcs LED; 112W; 10,400 Lumens
(4,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

24Z0004 Satin Black

Side

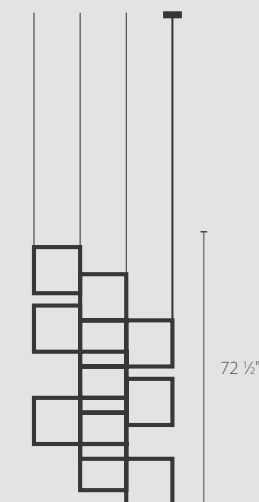

Bottom

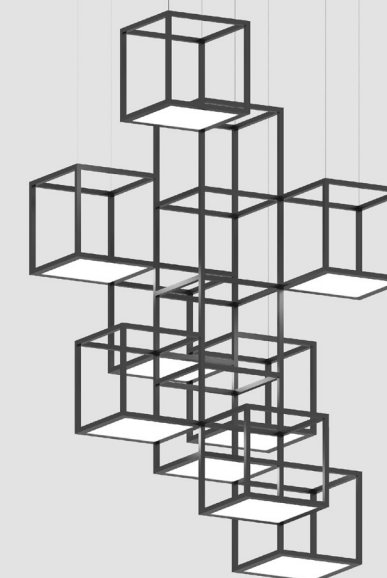



24Z0005

cubix[™] surface

modular architectural illumination

Low-profile Cubix Surface allows for ceiling surface mounting or suspended installation where a minimal height is desired across the plane of a space. Used as single fixtures, clusters, or linear patterns, or configured for expansive arrangements across larger spaces, Cubix Surface expands the utility and aesthetic application of this lighting system.

24Z0005

Cubix 1-Light Short LED Surface Mount

4 ¾" H x 12 ½" W x 12 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ¾" H x 12 ½" sq
Output: LED; 12W; 1,150 Lumens
(500 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

24Z0005 Satin Black

24Z0006

Cubix 3-Light LED Surface Mount

8 ¾" H x 36 ½" W x 24 ½" D
Shade: Aluminum w/LED Flat Panel
Canopy: ¾" H x 12 ½" sq
Output: 3pcs LED; 37W; 3,500 Lumens
(1,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

24Z0006 Satin Black



24Z0006



SYSTEMS | SONNEMAN[®]
A WAY OF LIGHT

24Z0005

Cubix 1-Light Short LED Surface Mount

4 3/4" H x 12 1/2" W x 12 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 3/4" H x 12 1/2" sq
Output: LED; 12W; 1,150 Lumens
(500 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

24Z0005 Satin Black

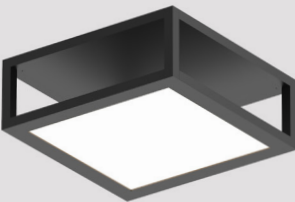


24Z0008

Cubix 1-Light Medium LED Surface Mount

8 3/4" H x 12 1/2" W x 12 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 3/4" H x 12 1/2" sq
Output: LED; 12W; 1,150 Lumens
(500 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

24Z0008 Satin Black





24Z0009

Cubix 1-Light Tall LED Surface Mount

12 3/4" H x 12 1/2" W x 12 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 3/4" H x 12 1/2" sq
Output: LED; 12W; 1,150 Lumens
(500 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

24Z0009 Satin Black



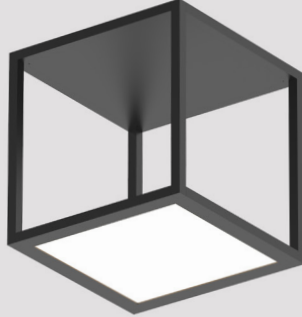


24Z0007

Cubix 7-Light LED Surface Mount

12 3/4" H x 84 1/2" W x 36 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 3/4" H x 12 1/2" sq
Output: 7pcs LED; 87W; 8,100 Lumens
(3,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

24Z0007 Satin Black

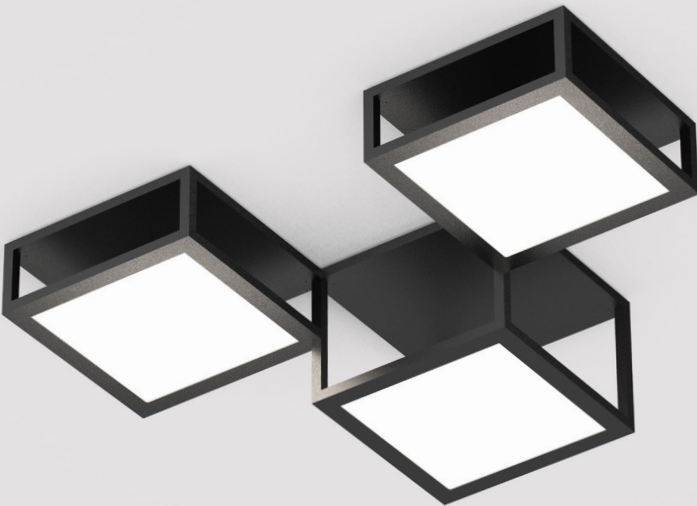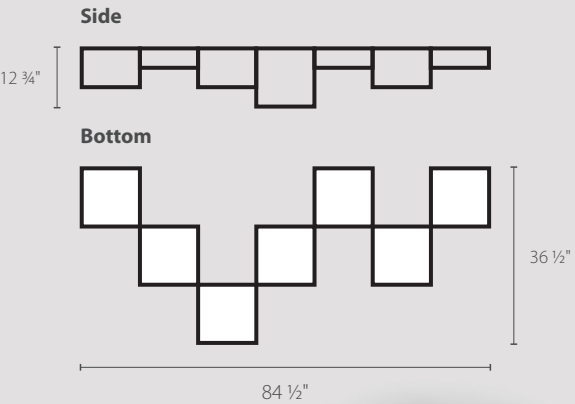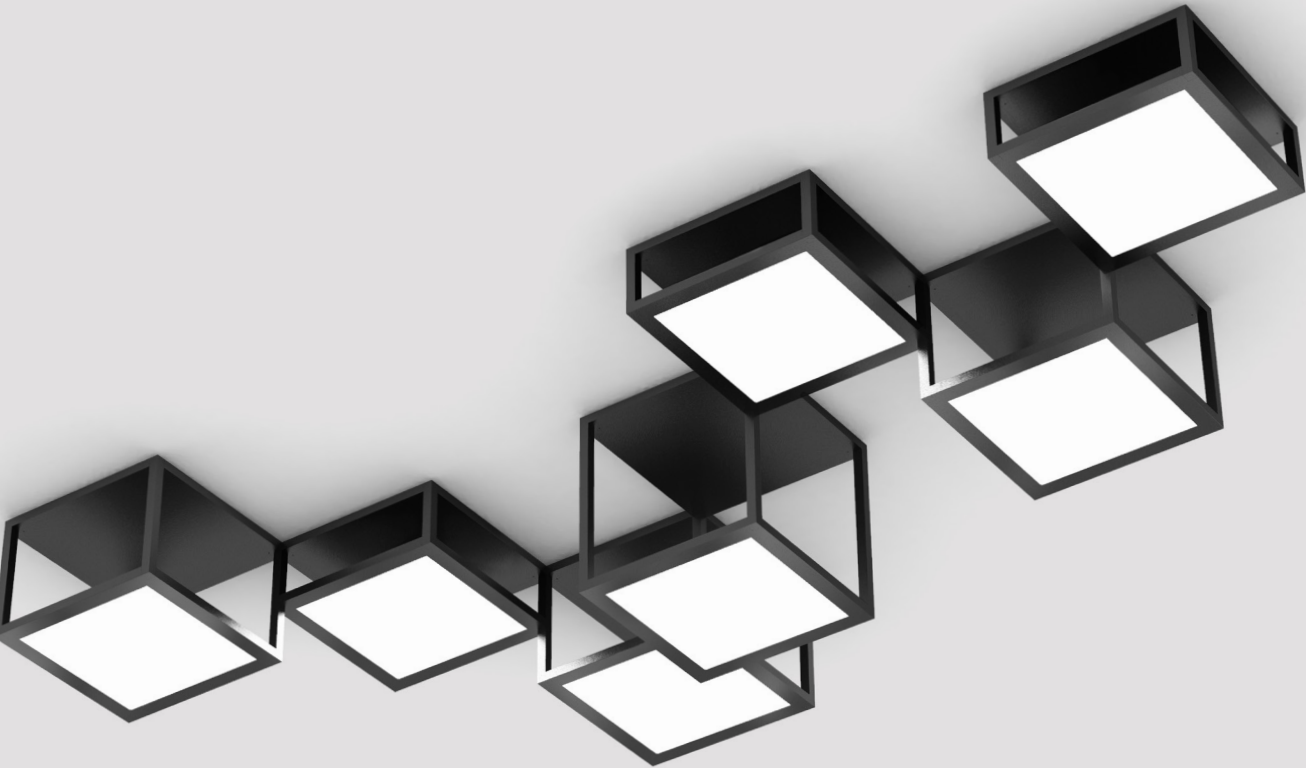


24Z0006

Cubix 3-Light LED Surface Mount

8 3/4" H x 36 1/2" W x 24 1/2" D
Shade: Aluminum w/LED Flat Panel
Canopy: 3/4" H x 12 1/2" sq
Output: 3pcs LED; 37W; 3,500 Lumens
(1,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

24Z0006 Satin Black

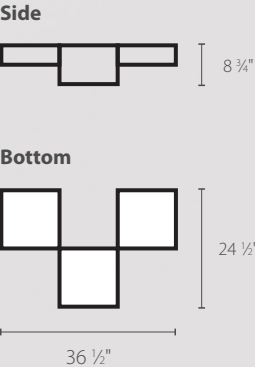


cubix™ surface configurations

For custom configurations contact our Contract Sales Team for assistance at contract@sonneman.com.

cubix™ overview

Cubix frames can connect to each other in multiple ways: edge-to-edge or face-to-face, at four different positions of intersection.

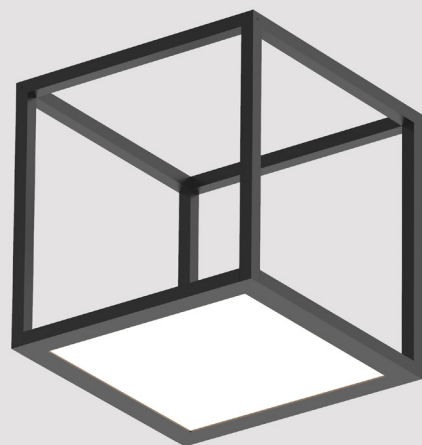

Start with a cube


Each cube can have a light panel at the bottom or top or be left open. Surface mounted cubes can be full height, 2/3rd height, or 1/3rd height.



full height




2/3 height



1/3 height


1

Cubes can connect **edge-to-edge** at four positions: Flush, 1/3rd height, 2/3rd height, and at the corners as shown.

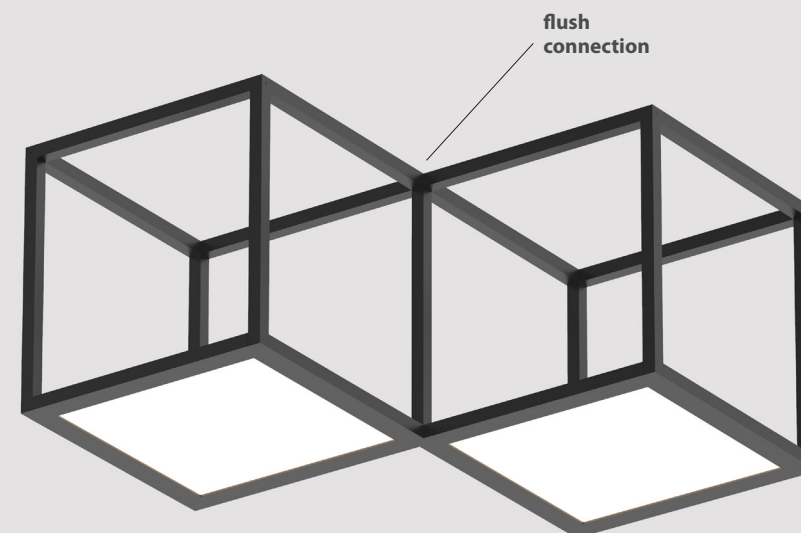


flush connection


2

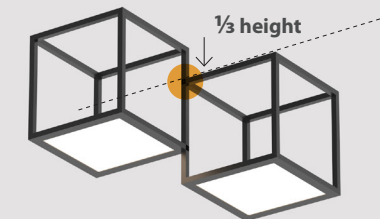

1/3 height

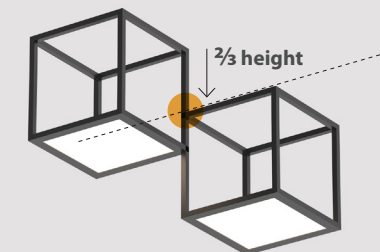


2/3 height

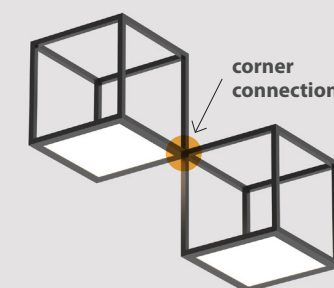

corner connection


Cubes can connect **face-to-face** at four positions: Flush, 1/3rd height, 2/3rd height, and at the corners as shown.

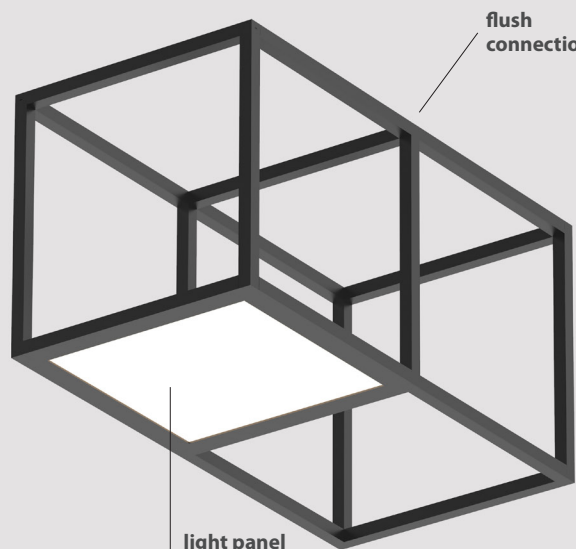


flush connection

light panel


NOTE: In a face-to-face flush connection, only one of the cubes can have a light panel at the bottom.

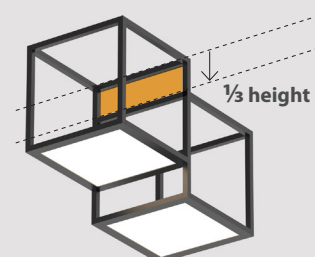

1/3 height

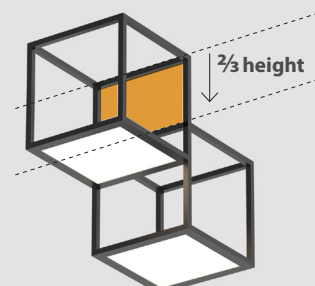


2/3 height

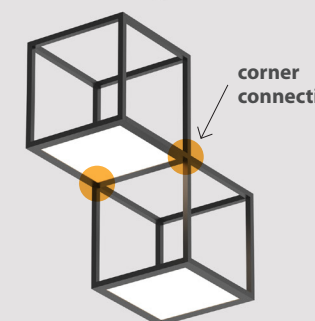

corner connection

3


4

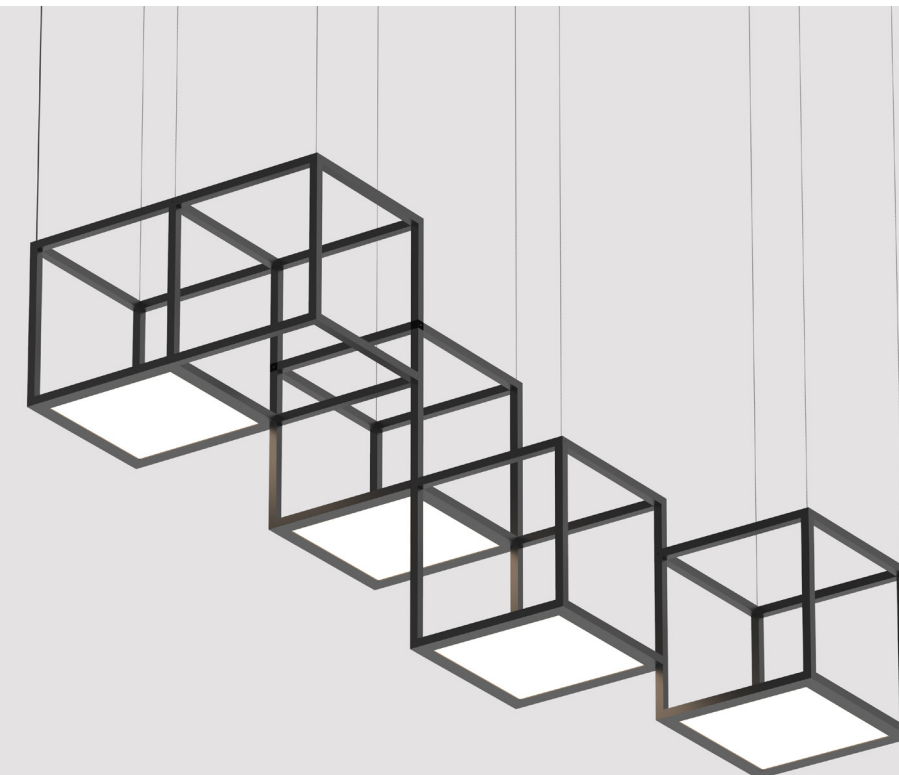

Continue adding cubes to build out the configuration

cubix™ components

4 types of connectors interlock varying arm lengths to compose frames and support the light panels.

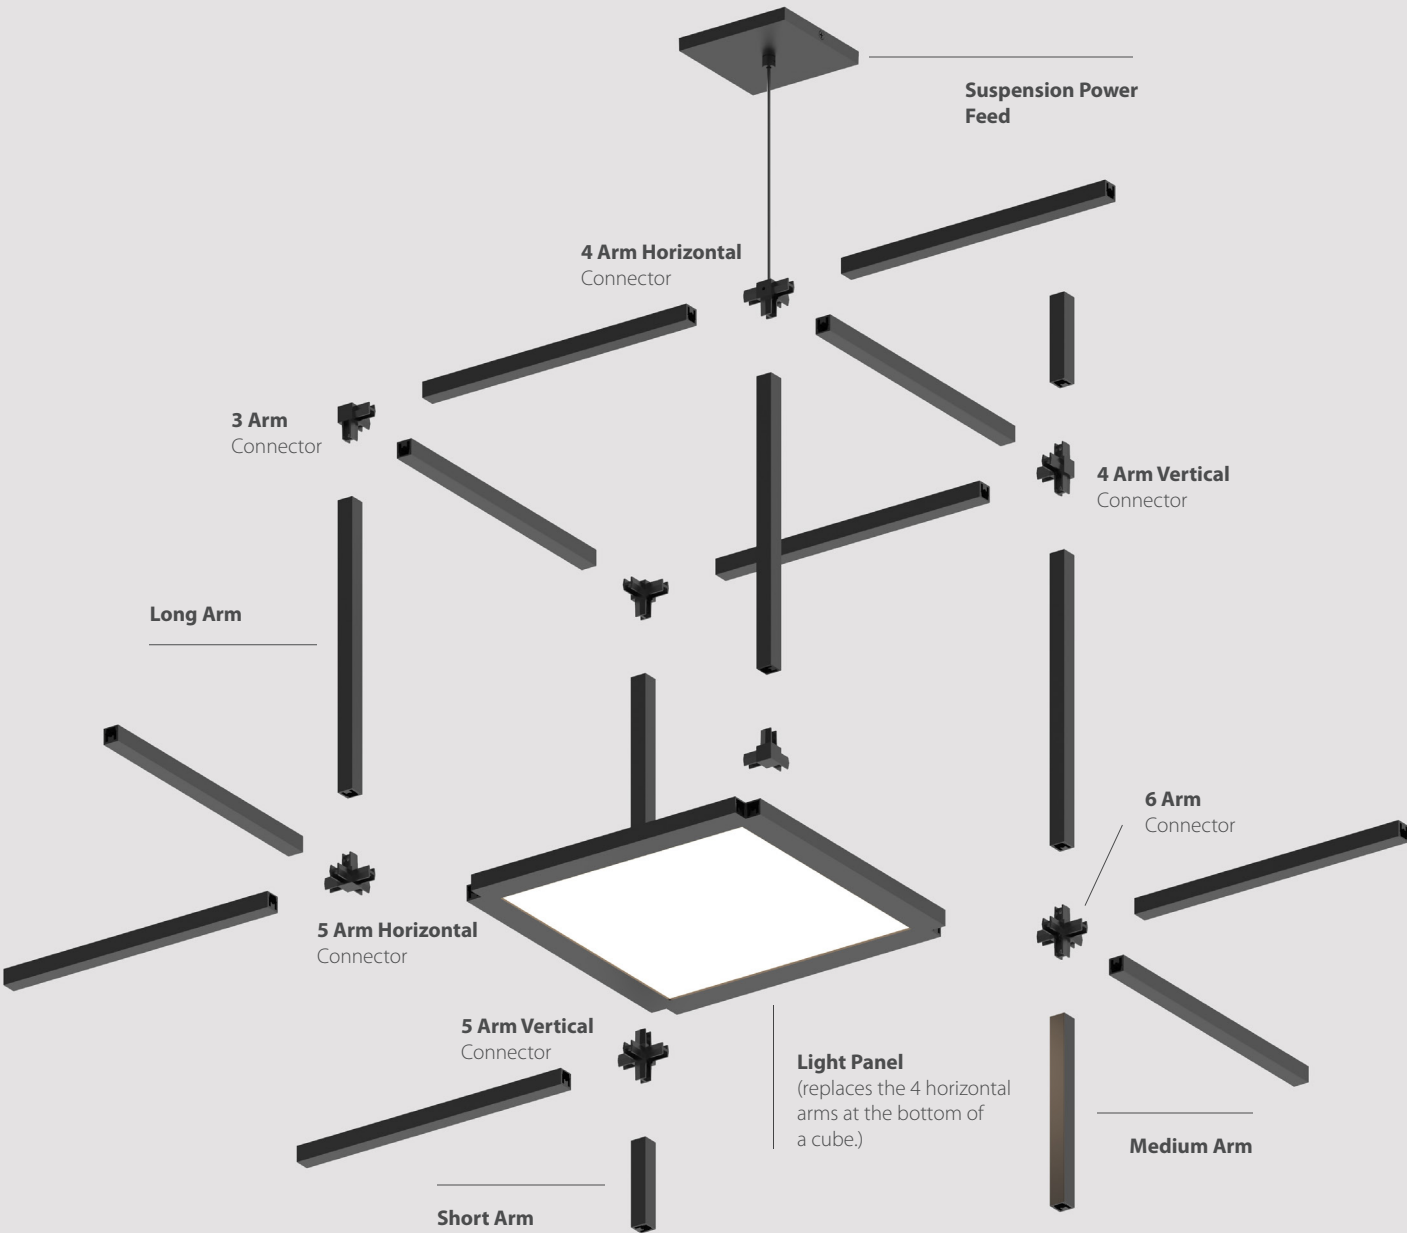


For custom configurations contact our Contract Sales Team for assistance at contract@sonneman.com.

POWER FEEDS

Suspension Power Feed
24SKP06



Surface Mount Power Feed
(replaces the horizontal arms at the top of a surface mount cube.)
24SKS12

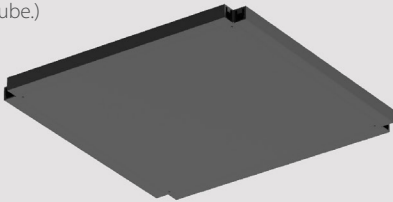

CONNECTORS

3 Arm Connector

w/Cable
24CK3A1




24CK3A0
24CK3B0




4 Arm Connector

w/Cable
24CK4A1H



Horizontal
24CK4A0H
24CK4B0H




Vertical
24CK4A0V




5 Arm Connector


w/Cable
24CK5A1H



Horizontal
24CK5A0H



Vertical
24CK5A0V
24CK5B0V



6 Arm Connector

24CK6A0



ARMS

Long Arm
24AK12



Medium Arm*
24AK08




Short Arm*
24AK04



* Can only be used for vertical arms.

LIGHT PANEL

24LK12S3090



*new celestial forms
expand our universe*

constellation[®] cosmic cube[™]

Connected in linear strands, a dramatically suspended array of LED hubs forms the geometry of a bold cube of dazzling luminance. Scaled in two sizes, Cosmic Cube can be ordered in 20" and 30" configurations or customized for your project.

2169

Constellation Cosmic Cube 30" LED Pendant

45" H x 30" W x 30" D

Shade: Acrylic

1/2" H x 1 1/2" DIA

Canopy: 2" H x 30" SQ w/10' Adjustable Cord

Output: 245pcs LED; 490W; 53,990 Lumens (37,980 Net Lumens);

Warm White (3000K); 90 CRI

Input: 100-277VAC w/(2) LED Drivers in Canopy

Dimming: 0-10V Controls

2169.13C Satin Nickel w/Clear Faceted Acrylic

2169.13W Satin Nickel w/White Optical Acrylic





2169.13C

SYSTEMS | SONNEMAN[®]
A WAY OF LIGHT



2168.13W

constellation® cosmic cube™

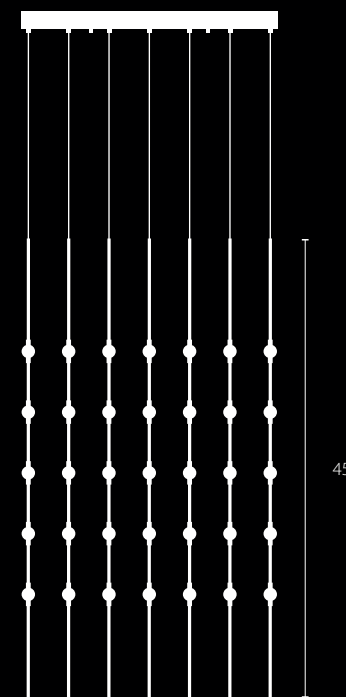

2169

Constellation Cosmic Cube 30" LED Pendant

45" H x 30" W x 30" D

Shade: Acrylic

1/2" H x 1 1/2" DIA

Canopy: 2" H x 30" sq w/10' Adjustable Cord

Output: 245pcs LED; 490W; 53,990 Lumens (37,980 Net Lumens);



Warm White (3000K); 90 CRI

Input: 100-277VAC w/(2) LED Drivers in Canopy

Dimming: 0-10V Controls

2169.13C Satin Nickel w/Clear Faceted Acrylic

2169.13W Satin Nickel w/White Optical Acrylic

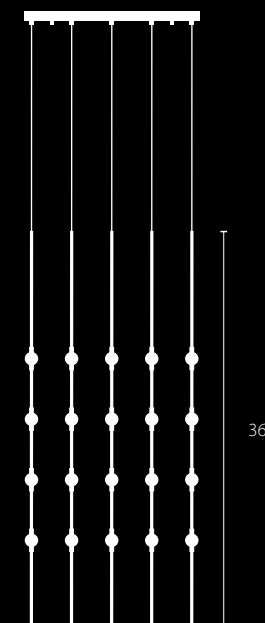

2168

Constellation Cosmic Cube 20" LED Pendant

36" H x 20 1/2" W x 20 1/2" D

Shade: Acrylic

1/2" H x 1 1/2" DIA

Canopy: 2" H x 20 1/2" sq w/10' Adjustable Cord

Output: 100pcs LED; 200W; 22,040 Lumens (15,500 Net Lumens);

Warm White (3000K); 90 CRI

Input: 100-277VAC w/(2) LED Drivers in Canopy

Dimming: 0-10V Controls

2168.13C Satin Nickel w/Clear Faceted Acrylic

2168.13W Satin Nickel w/White Optical Acrylic



constellation® andromeda™

LED hubs connected in linear strands of various lengths are suspended to form dramatically powerful luminance within a vertical space. Available in a variety of sizes and configurations, with lens options of crystal facets or soft white, Andromeda can also be customized for your project.

Shown with Satin Nickel w/Clear Faceted Acrylic

constellation[®] andromeda™

2162.13C-T

2162-T Constellation Andromeda Tall 12" Round LED Pendant

78" H x 12" DIA
Shade: Acrylic
1/2" H x 1 1/2" DIA
Canopy: 1" H x 12" DIA w/10' Adjustable Cord
Output: 55pcs LED; 110W; 12,120 Lumens
(8,530 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: 0-10V Controls

2162.13C-T Satin Nickel w/Clear Faceted Acrylic
2162.13W-T Satin Nickel w/White Optical Acrylic


2164 Constellation Andromeda 25" Round LED Pendant

94" H x 25" DIA
Shade: Acrylic
1/2" H x 1 1/2" DIA
Canopy: 1" H x 25" DIA w/10' Adjustable Cord
Output: 156pcs LED; 312W; 34,380 Lumens
(24,180 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: 0-10V Controls


2164.13C Satin Nickel w/Clear Faceted Acrylic
2164.13W Satin Nickel w/White Optical Acrylic

2164.13C


constellation® andromeda™

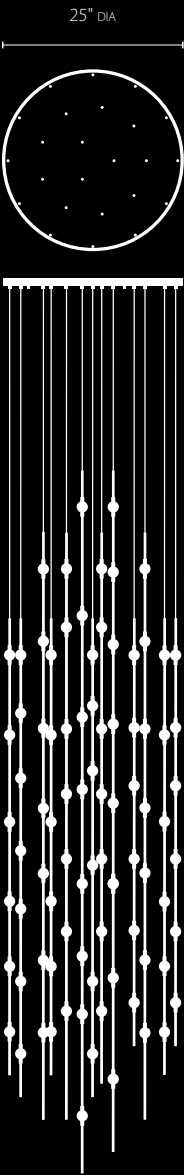

2164
Constellation Andromeda
25" Round LED Pendant
94" H x 25" DIA
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: 1" H x 25" DIA
w/10' Adjustable Cord
Output: 156pcs LED; 312W;
34,380 Lumens (24,180 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: 0-10V Controls
2164.13C
Satin Nickel w/Clear Faceted Acrylic
2164.13W
Satin Nickel w/White Optical Acrylic



2162-T
Constellation Andromeda Tall
12" Round LED Pendant
78" H x 12" DIA
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: 1" H x 12" DIA
w/10' Adjustable Cord
Output: 55pcs LED; 110W;
12,120 Lumens (8,530 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: 0-10V Controls
2162.13C-T
Satin Nickel w/Clear Faceted Acrylic
2162.13W-T
Satin Nickel w/White Optical Acrylic

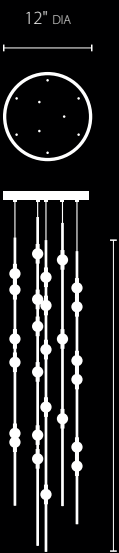


2162-S
Constellation Andromeda Short
12" Round LED Pendant
39" H x 12" DIA
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: 1" H x 12" DIA
w/10' Adjustable Cord
Output: 26pcs LED; 52W;
5,730 Lumens (4,030 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V
2162.13C-S
Satin Nickel w/Clear Faceted Acrylic
2162.13W-S
Satin Nickel w/White Optical Acrylic




2161-T
Constellation Andromeda Tall
6" Round LED Pendant
78" H x 6" DIA
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: ½" H x 6" DIA
w/10' Adjustable Cord
Output: 18pcs LED; 36W;
3,970 Lumens (2,790 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V
2161.13C-T
Satin Nickel w/Clear Faceted Acrylic
2161.13W-T
Satin Nickel w/White Optical Acrylic




2161-S
Constellation Andromeda Short
6" Round LED Pendant
34" H x 6" DIA
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: ½" H x 6" DIA
w/10' Adjustable Cord
Output: 8pcs LED; 16W;
1,770 Lumens (1,240 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V
2161.13C-S
Satin Nickel w/Clear Faceted Acrylic
2161.13W-S
Satin Nickel w/White Optical Acrylic

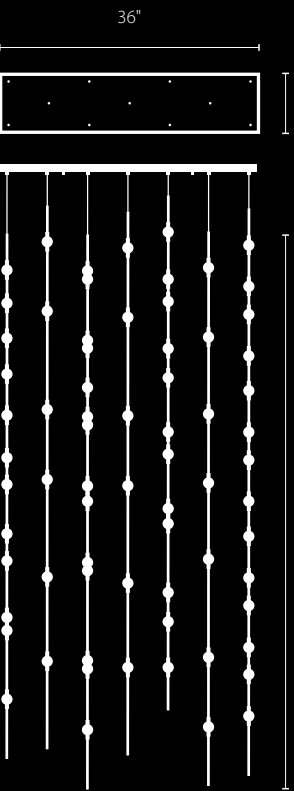

2166
Constellation Andromeda
36" Rectangle LED Pendant
75" H x 36" W x 8" D
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: 1" H x 36" W x 8" D
w/10' Adjustable Cord
Output: 69pcs LED; 138W;
15,210 Lumens (10,700 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V
2166.13C
Satin Nickel w/Clear Faceted Acrylic
2166.13W
Satin Nickel w/White Optical Acrylic

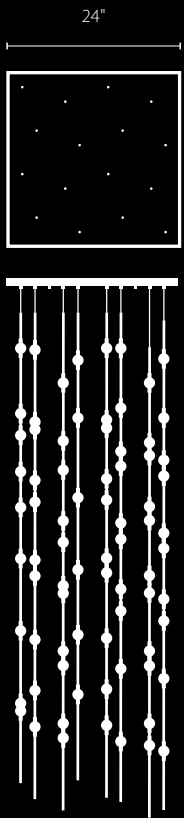

2165
Constellation Andromeda
24" Square LED Pendant
67" H x 24" W x 24" D
Shade: Acrylic
½" H x 1 ½" DIA
Canopy: 1" H x 24" so
w/10' Adjustable Cord
Output: 96pcs LED; 192W;
21,120 Lumens (12,460 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote
LED Driver
Dimming: 0-10V Controls
2165.13C
Satin Nickel w/Clear Faceted Acrylic
2165.13W
Satin Nickel w/White Optical Acrylic

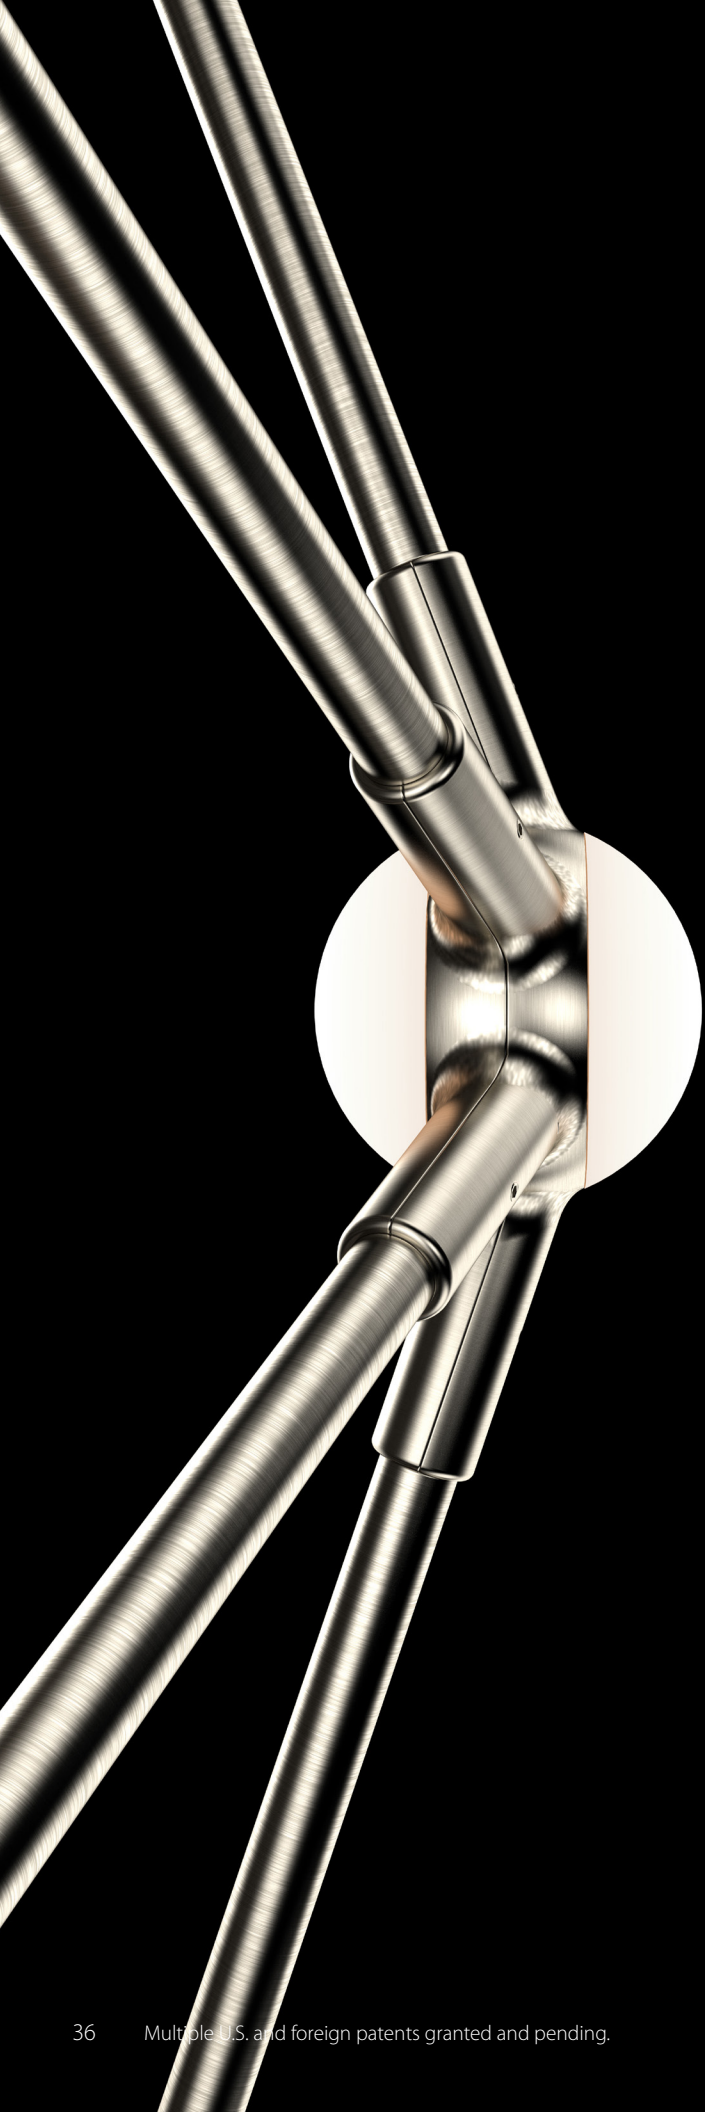

constellation[®] hedron[™]

Hedron is a spectacular celestial composition of radiant LED hubs connected by the triangular structural tension of minimal coaxial rods. The dazzling luminance and expansive scale forms a sculptural connection to the physical properties that define the galaxies of space, occupying a large volume with a low density of mass.

2170

Constellation Hedron LED Pendant

45 3/4" H x 45" DIA

Shade: Acrylic

1/2" H x 1 1/2" DIA

Canopy: 2" H x 8" DIA w/6' Adjustable Cord/Cable

Output: 40pcs LED; 80W; 8,850 Lumens

(5,200 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2170.13W Satin Nickel w/White Optical Acrylic

2170.37C Polished Black Nickel w/Clear Faceted Acrylic



2170.13W

SYSTEMS

SONNEMAN[®]
A WAY OF LIGHT

37

constellation[®] hedron[™]

2170

Constellation Hedron LED Pendant

45 3/4" H x 45" DIA

Shade: Acrylic

1/2" H x 1 1/2" DIA

Canopy: 2" H x 8" DIA w/6' Adjustable Cord/Cable

Output: 40pcs LED; 80W; 8,850 Lumens

(5,200 Net Lumens); Warm White (3000K); 90 CRI


Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2170.13W Satin Nickel w/White Optical Acrylic

2170.37C Polished Black Nickel w/Clear Faceted Acrylic



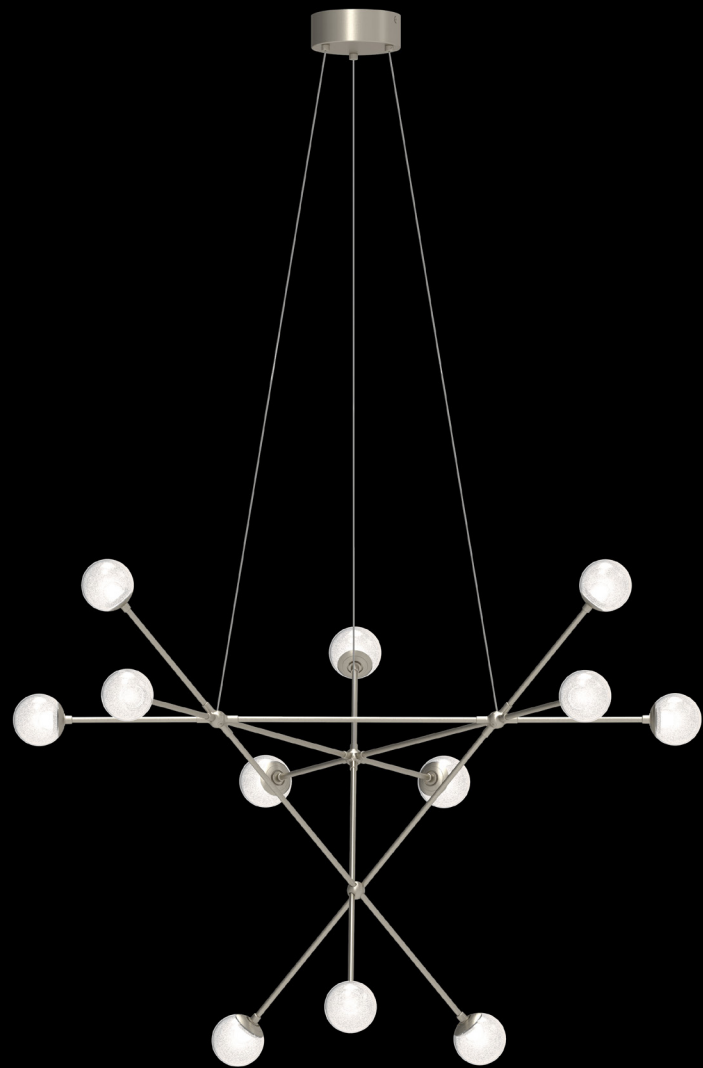

2082.13W

2082

Proton Alpha LED Pendant

27" H x 40" DIA

Shade: Glass

2 1/2" H x 3" DIA

Canopy: 2" H x 5" DIA w/10' Adjustable Cord

Output: 12pcs LED; 30W; 2,640 Lumens
(1,680 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2082.13W

Satin Nickel w/White Crushed Glass

2082.37K

Polished Black Nickel w/Smoke Glass

2082.37W


Polished Black Nickel w/White Crushed Glass



2082.37K

protonTM alpha

This delicately scaled but inherently strong connection of rigid triangular forms describes the achievement of structural volume from minimal elements. Named for a subatomic particle and building block of energy, Proton radiates its powerful LED illumination from pristine glass luminaires that terminate each intersecting rod. Configured in a bottom-weighted tripod called Alpha, or in a double pyramid configuration called Beta, these amazingly scaled fixtures could only be achieved through superior engineering and technology. Available in two finishes with several glass options, Proton brings art to the structure of simplicity.

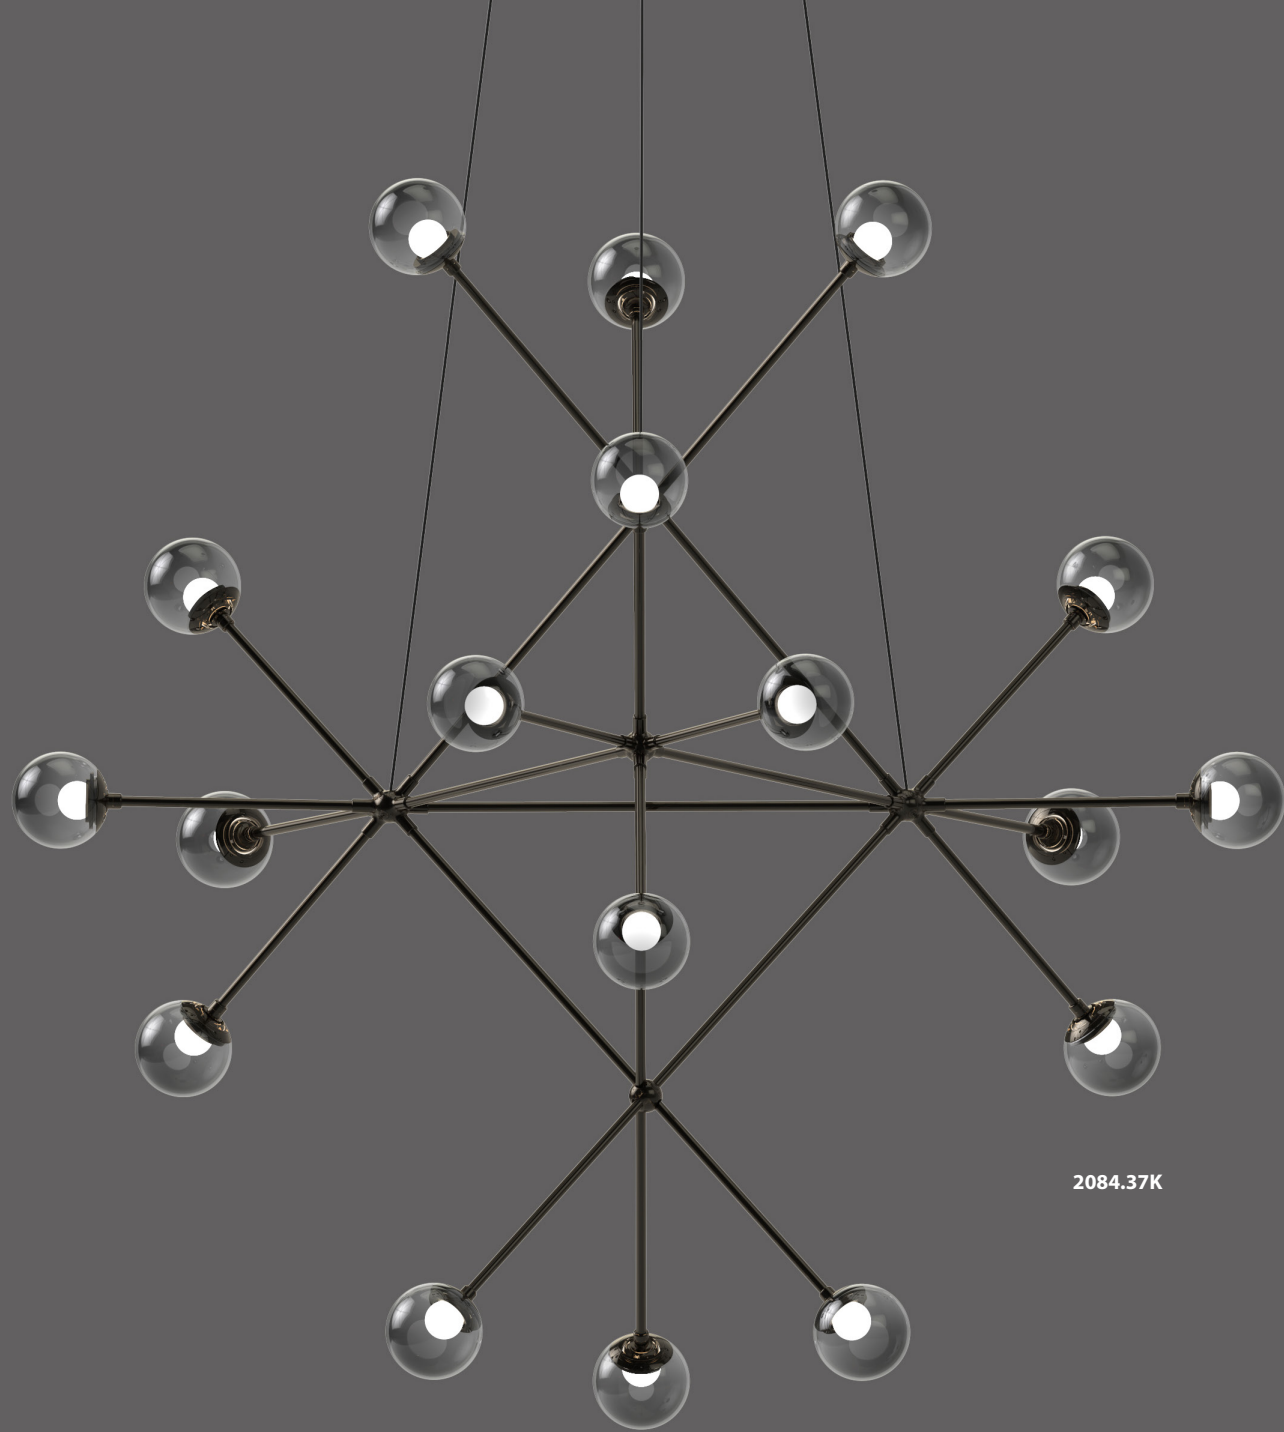

2084.37K

proton™ beta

2084

Proton Beta LED Pendant

34" H x 40" DIA

Shade: Glass

2 1/2" H x 3" DIA

Canopy: 2" H x 5" DIA w/10' Adjustable Cord

Output: 18pcs LED; 48W; 3,960 Lumens

(2,520 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Canopy


Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2084.13W Satin Nickel w/White Crushed Glass

2084.37K Polished Black Nickel w/Smoke Glass

2084.37W Polished Black Nickel w/White Crushed Glass

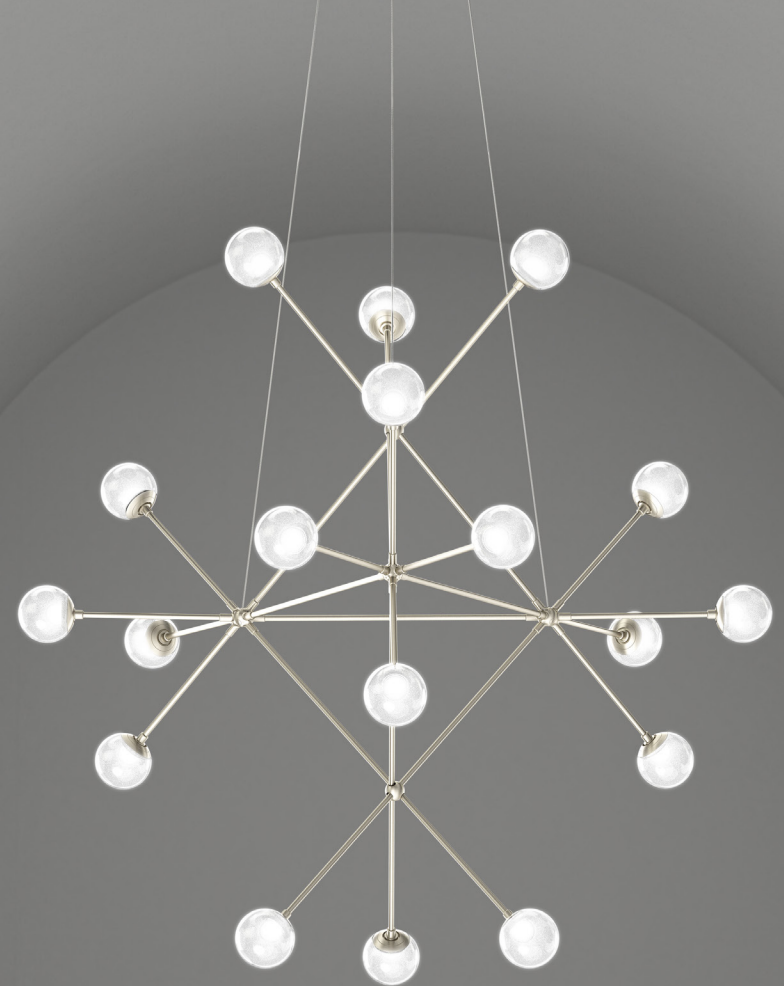

2084.13W

ARCHITECTURAL

SONNEMAN
A WAY OF LIGHT

43



nebula™

Intersecting stems form clusters of illuminated glass spheres in a dance-like rhythm. Mounted in precisely poised positions along rectangular beams in linear and rectilinear configurations of expansive scale, these Nebula constructions form illuminating sculptures of joyous activity in dramatic scale and proportion.

2068.25

2068

Nebula Large Square LED Pendant

26 1/2" H x 79 3/4" W x 69 1/4" D

Shade: White Etched Cased Glass

(31) 2 3/4" H x 3" DIA

(39) 3 3/4" H x 4" DIA

(14) 4 3/4" H x 5" DIA

Canopy: 2" H x 16" W x 10" D

w/6' Adjustable Cord/Cable

Output: 84pcs LED; 240W;

27,700 Lumens (15,100 Net Lumens);

Warm White (3000K); 90 CRI


Input: 100-277VAC w/(2) LED Drivers

in Canopy


Dimming: 0-10V Controls

2068.13 Satin Nickel

2068.25 Satin Black

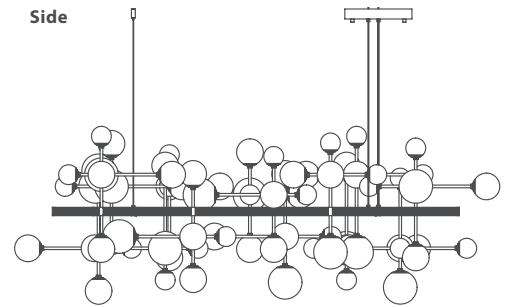

Bottom

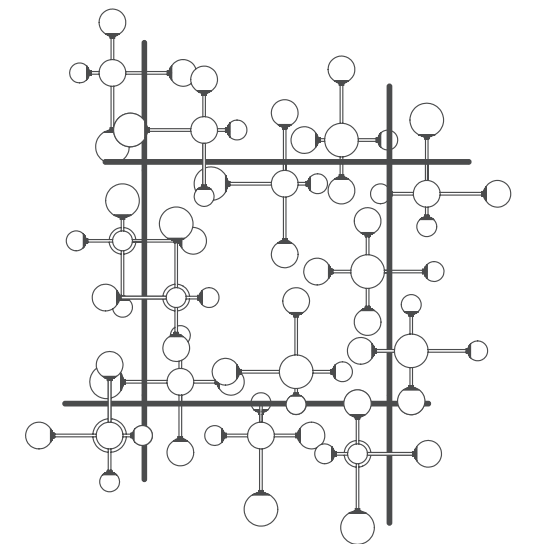

2065

Nebula Square LED Pendant

26" H x 61" W x 56 3/4" D

Shade: White Etched Cased Glass

(15) 2 3/4" H x 3" DIA

(21) 3 3/4" H x 4" DIA

(12) 4 3/4" H x 5" DIA

Canopy: 2" H x 8" W x 8" D

w/6' Adjustable Cord/Cable

Output: 48pcs LED; 180W;

15,900 Lumens (8,700 Net Lumens);

Warm White (3000K); 90 CRI

Input: 100-277VAC w/(2) LED Drivers

in Canopy


Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent


(at 120VAC only), or 0-10V

2065.13 Satin Nickel

2065.25 Satin Black

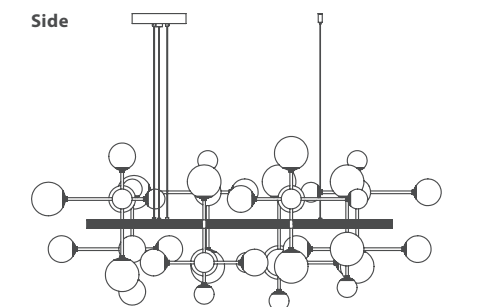

Bottom

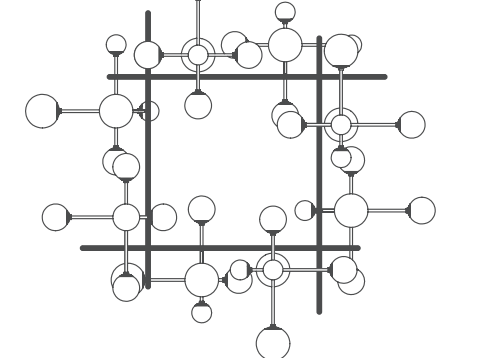

nebula™


2066

Nebula LED Bar Pendant


26 ¾" H x 68 ¾" W x 33 ¼" D
Shade: White Etched Cased Glass
(11) 2 ¾" H x 3" DIA
(17) 3 ¾" H x 4" DIA
(14) 4 ¾" H x 5" DIA
Canopy: 2" H x 22" W x 5" D w/6' Adjustable Cord/Cable
Output: 42pcs LED; 140W; 13,900 Lumens (7,600 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/(2) LED Drivers in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V

2066.13 Satin Nickel
2066.25 Satin Black

Side

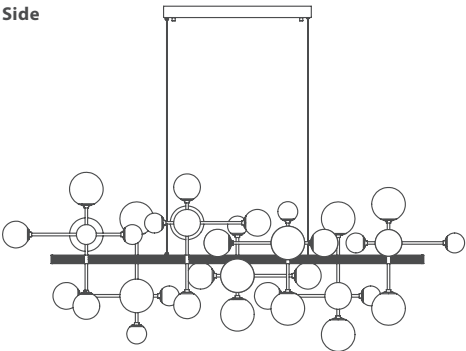

Bottom

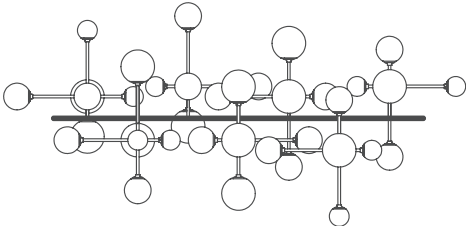


nebula™

2067

Nebula Zig-Zag LED Pendant

26 ½" H x 95 ½" W x 49 ½" D
Shade: White Etched Cased Glass
(19) 2 ¾" H x 3" DIA
(24) 3 ¾" H x 4" DIA
(11) 4 ¾" H x 5" DIA
Canopy: 2" H x 16" W x 10" D w/6' Adjustable Cord/Cable
Output: 54pcs LED; 180W; 17,800 Lumens (9,700 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/(2) LED Drivers in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V

2067.13 Satin Nickel
2067.25 Satin Black

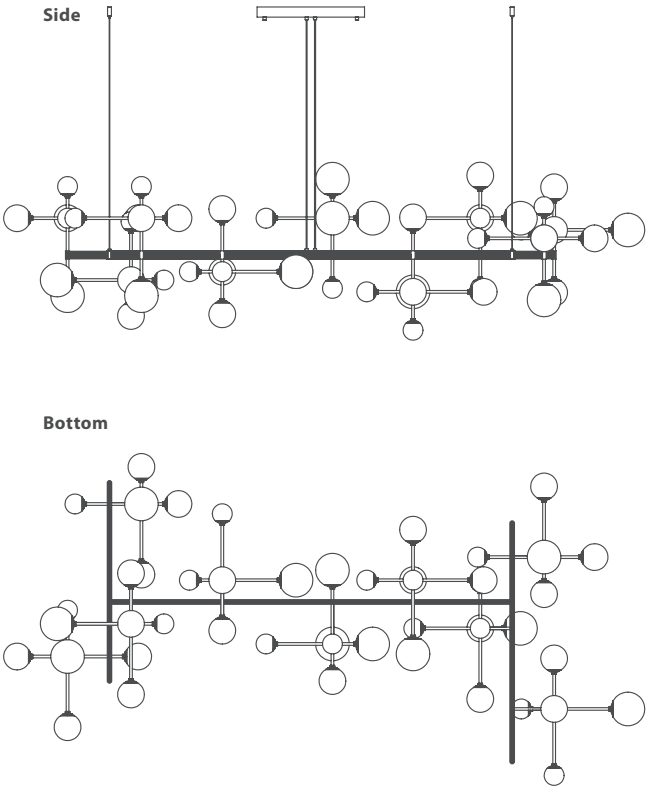

2067.25



2064.25



2069.25

2064

Sabon LED Pendant

27" H X 29" DIA

Shade: White Etched Cased Glass

(3) 2 3/4" H X 3" DIA

(6) 3 3/4" H X 4" DIA

(4) 4 3/4" H X 5" DIA

Canopy: 2" H X 5" DIA W/(3) 12" + (1) 6" Stem Kit

Output: 13pcs LED; 48W; 4,300 Lumens

(2,350 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2064.13 Satin Nickel

2064.25 Satin Black

2069

Sabon LED Semi-Flush

15 1/4" H X 36 1/4" W X 31 1/4" D

Shade: White Etched Cased Glass

(5) 2 3/4" H X 3" DIA

(5) 3 3/4" H X 4" DIA

(4) 4 3/4" H X 5" DIA

Canopy: 1/2" H X 4 1/2" DIA

Output: 14pcs LED; 49W; 4,600 Lumens

(2,500 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent

2069.13 Satin Nickel

2069.25 Satin Black

sabon™

Luminous etched glass globes of varying sizes float on intersecting stems at right angles to each other to form arrangements of geometric sculptural presence and simplicity.

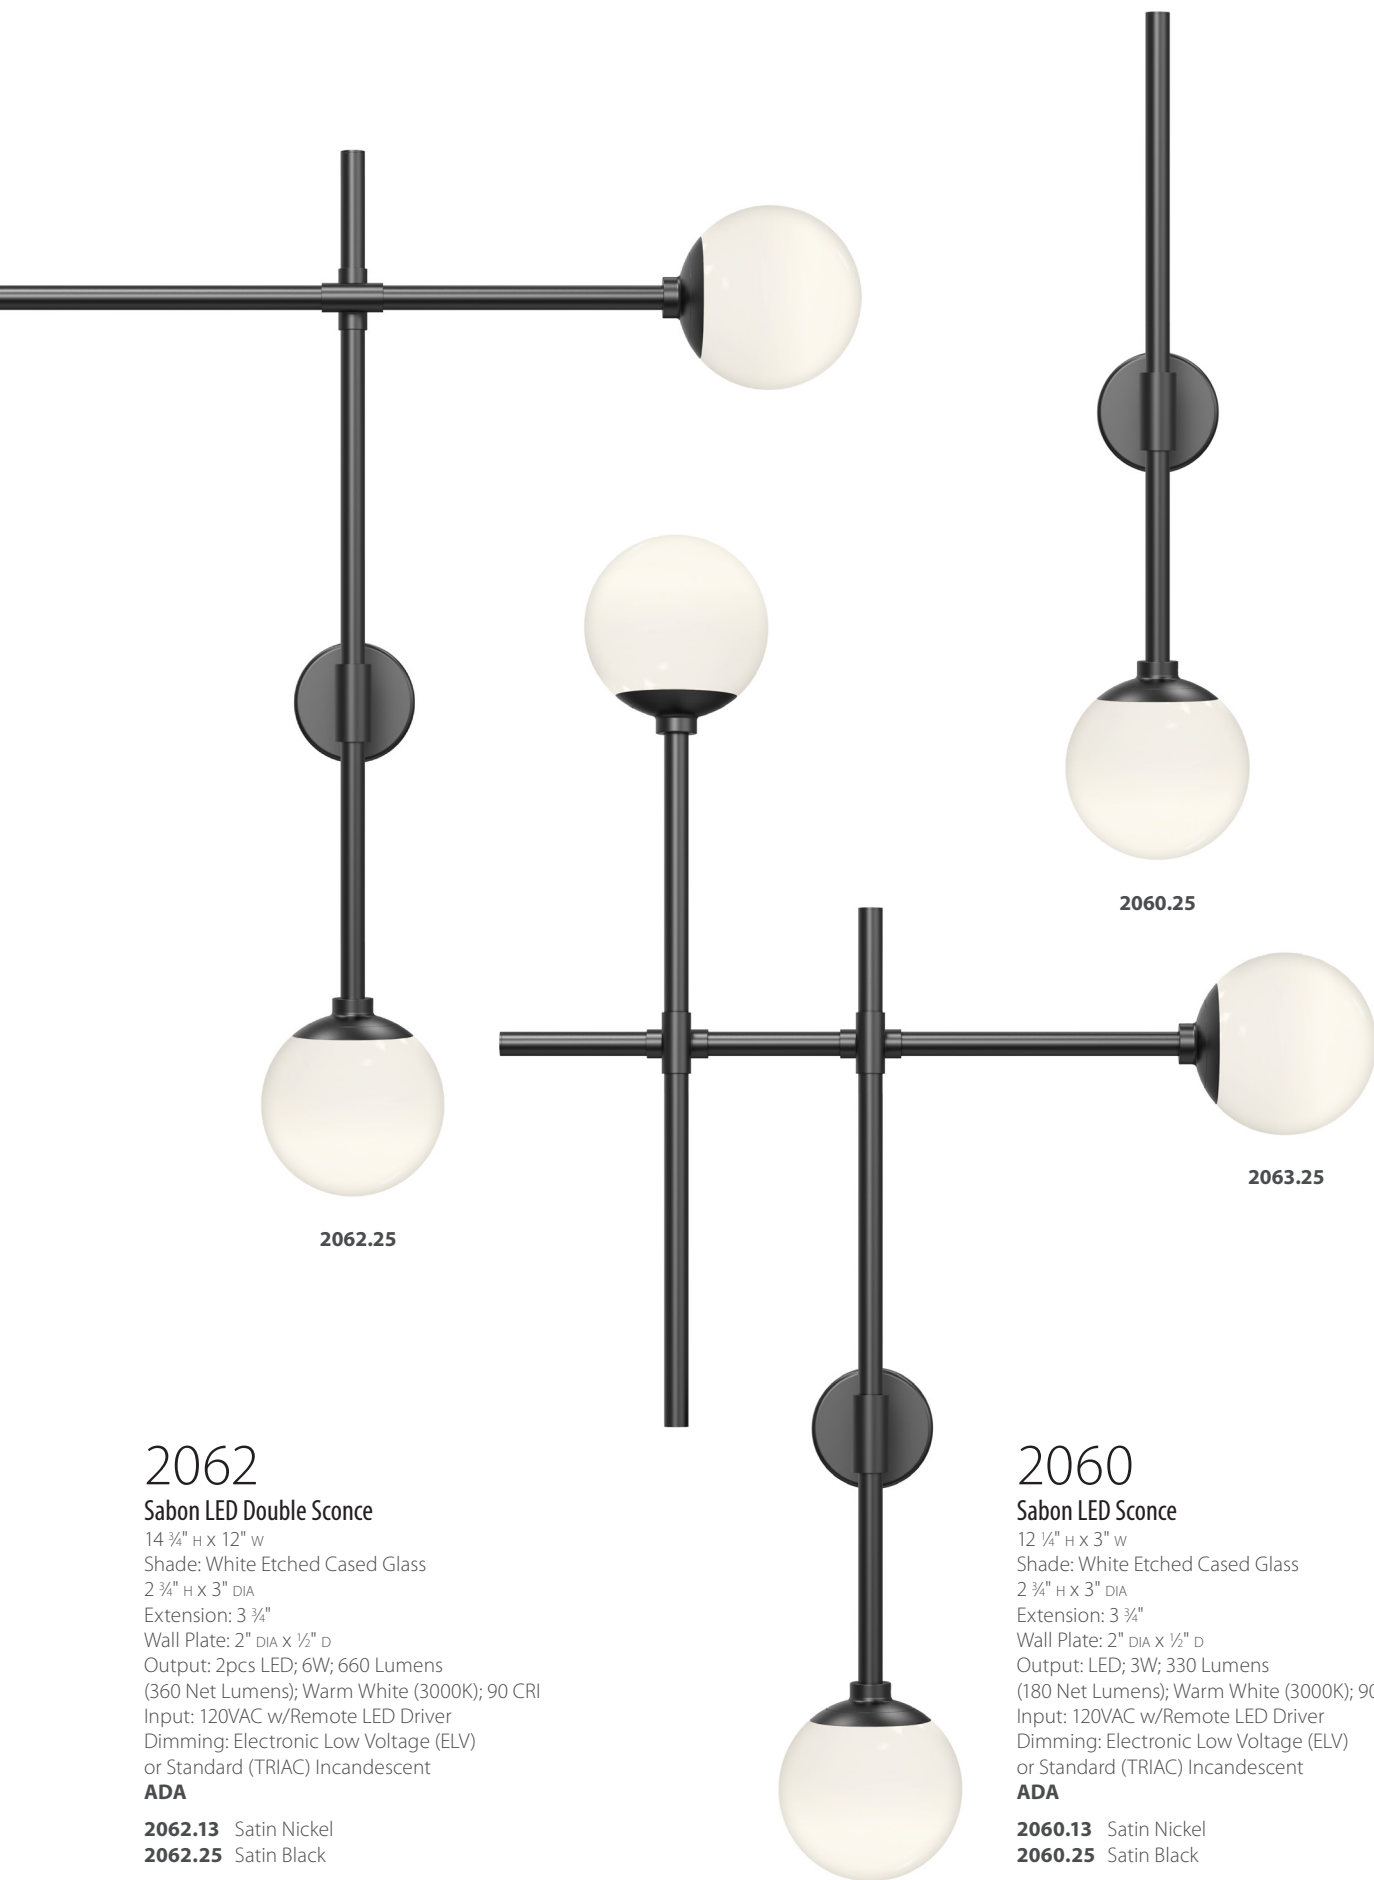

2062

Sabon LED Double Sconce

14 3/4" H x 12" W
 Shade: White Etched Cased Glass
 2 3/4" H x 3" DIA
 Extension: 3 3/4"
 Wall Plate: 2" DIA x 1/2" D
 Output: 2pcs LED; 6W; 660 Lumens
 (360 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/Remote LED Driver
 Dimming: Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent
ADA

2062.13 Satin Nickel
2062.25 Satin Black

Optional 4 1/2" wall plate kit available

2060

Sabon LED Sconce

12 1/4" H x 3" W
 Shade: White Etched Cased Glass
 2 3/4" H x 3" DIA
 Extension: 3 3/4"
 Wall Plate: 2" DIA x 1/2" D
 Output: LED; 3W; 330 Lumens
 (180 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/Remote LED Driver
 Dimming: Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent
ADA

2060.13 Satin Nickel
2060.25 Satin Black

Optional 4 1/2" wall plate kit available

2063

Sabon LED Triple Sconce

19 1/2" H x 13 1/2" W
 Shade: White Etched Cased Glass
 2 3/4" H x 3" DIA
 Extension: 3 3/4"
 Wall Plate: 2" DIA x 1/2" D
 Output: 3pcs LED; 9W; 990 Lumens
 (540 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/Remote LED Driver
 Dimming: Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent
ADA


2063.13 Satin Nickel
2063.25 Satin Black

Optional 4 1/2" wall plate kit available

sabon sconce™

Crisply modern with a classic feel, Sabon Sconce brings solid functional design to this lighting task. The white etched cased globe radiates a soft illumination. Sabon's expression of simplicity shows that less is definitely more.

2063.13

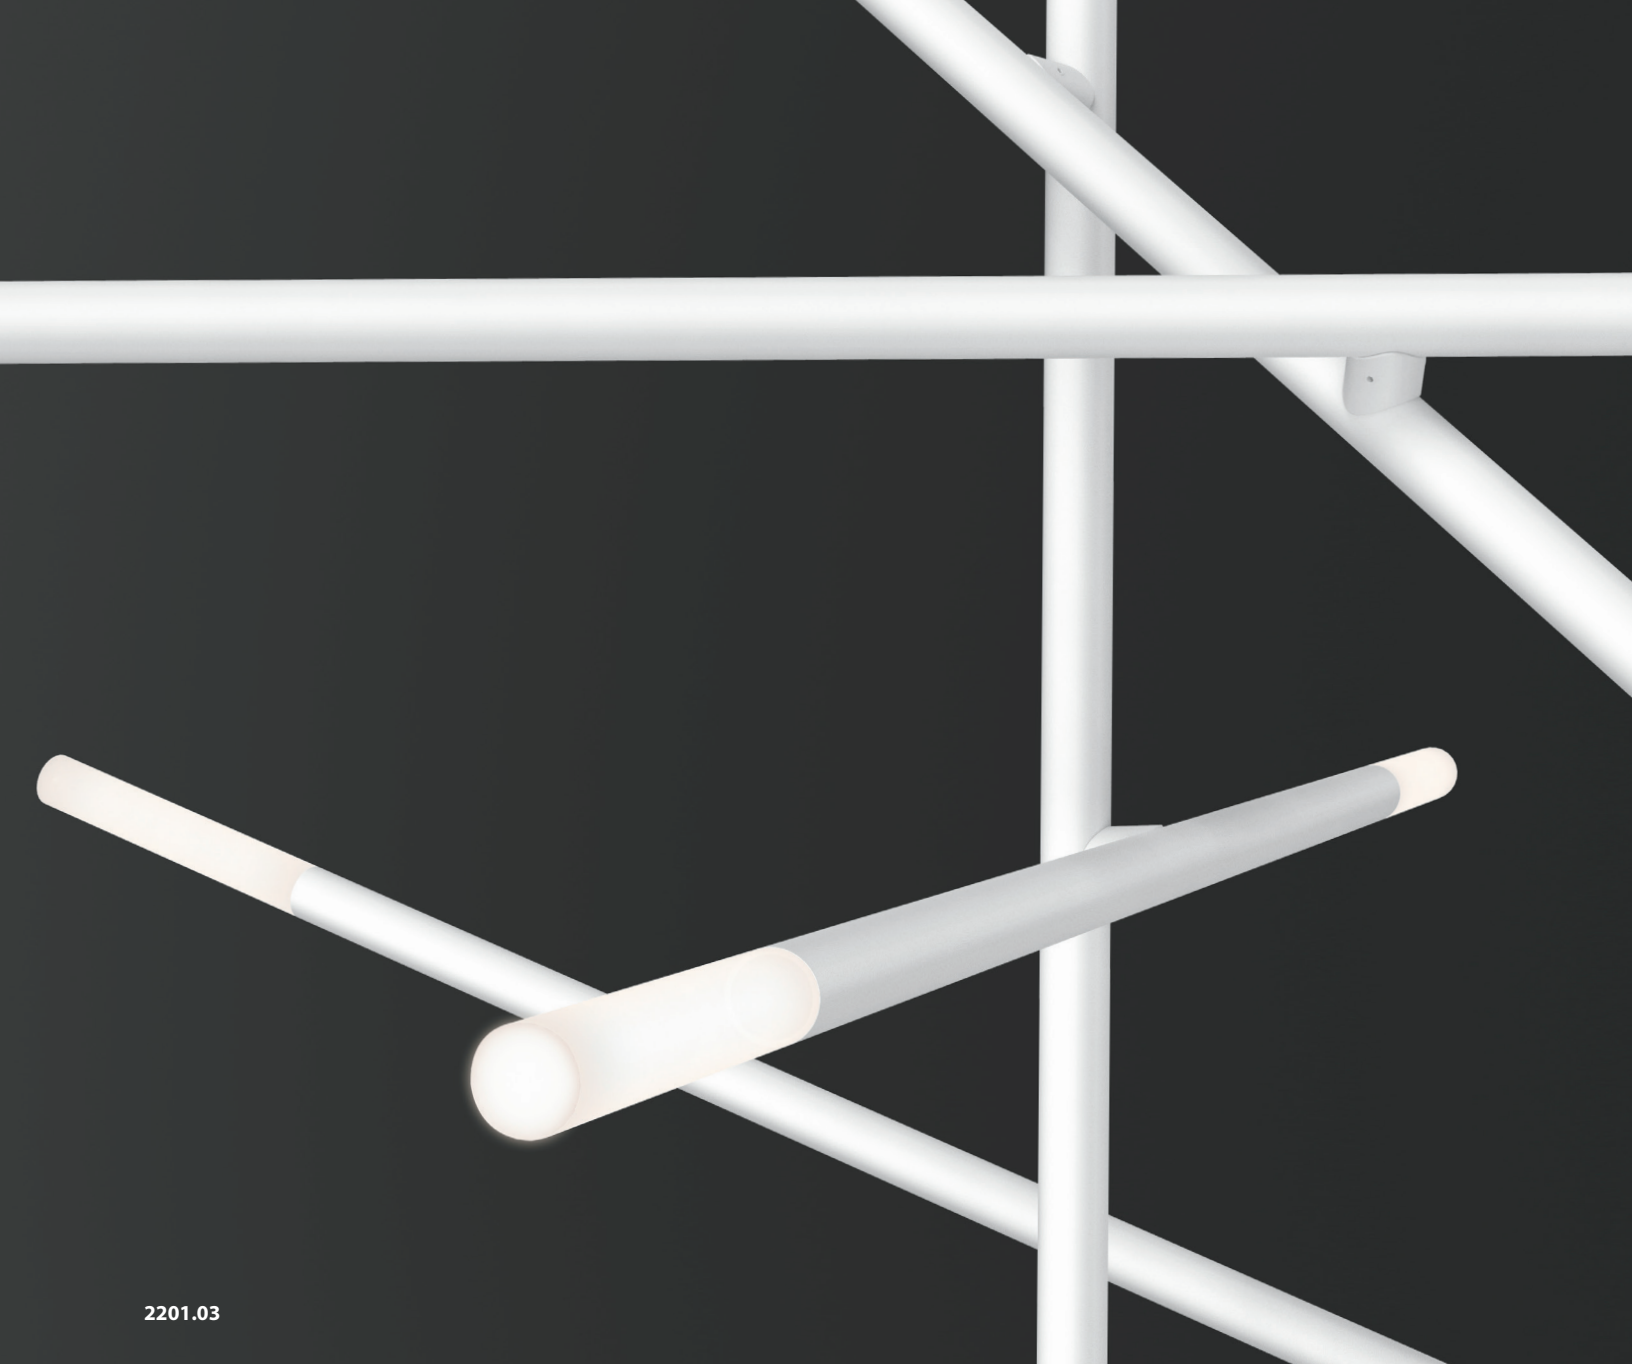

2201.03

qux™

Intersecting wands of illumination form an abstract configuration about a vertical axis. Dramatically scaled, Qux derives its sculptural interest from the complexity of the arrangement of its simple elements. The Qux luminaire can be used alone or combined with others to form an expansive composition of intersecting sculpture.

2201

Qux LED Pendant

44" H x 39 1/8" W x 37" D
 Shade: Frosted Acrylic
 5" H x 3/4" DIA
 Canopy: 2" H x 5" DIA w/(3) 12" + (1) 6" Stem Kit
 Output: 11pcs LED; 35W; 4,400 Lumens (3,000 Net Lumens);
 Warm White (3000K); 90 CRI
 Input: 120-277VAC w/LED Driver in Canopy
 Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
 Incandescent (at 120VAC only), or 0-10V

2201.03 Satin White
2201.25 Satin Black



2201.25

qux™

2201

Qux LED Pendant

44" H x 39 1/2" W x 37" D

Shade: Frosted Acrylic

Canopy: 2" H x 5" DIA w/(3) 12" + (1) 6" Stem Kit

Stem Kit: (3) 12" + (1) 6" Stem Kit

Output: 11pcs LED; 35W; 4,400 Lumens (3,000 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC Input w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2201.03 Satin White

2201.25 Satin Black





qux™

2205

Qux LED Floor Lamp

77 1/2" H x 22 3/4" W x 21 1/2" D

Shade: Frosted Acrylic

5" H x 3/4" DIA

Base: 22 1/2" DIA w/8' Cord

Switch: In-Line Floor Dimmer

Output: 4pcs LED; 24W; 3,000 Lumens
(2,100 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-240VAC w/Power Supply on Plug

2205.03 Satin White

2205.25 Satin Black



QA38.01 | Satin Black

2205.25

ARCHITECTURAL

SONNEMAN
A WAY OF LIGHT

59



vines™

Organically sweeping curves undulate in flowing vine-like configurations on which illuminated glass seedpods extend from the softly intersecting branches. Available in several configurations, Vines can be suspended singularly or in clusters to scale into dramatically large sweeping installations of extraordinary sculptural presence. The glass pods have crushed glass interior surfaces that refract and reflect the LED light at infinite angles, producing a luminous radiance from within the smoothly tapered pods. Available in three finishes, Black, White, and Bronze, with hand-blown glass pods in White or Amber.

3283

Vines LED Pendant

39" H x 77 1/4" W x 34" D

Shade: Glass

6 3/4" H x 2 1/2" W x 1 3/4" D

Canopy: 2" H x 5" DIA w/6' Adjustable Cord/Cable

Output: 14pcs LED; 14W; 1,550 Lumens

(1,100 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 1200VAC only), or 0-10V

3283.03 Satin White w/White Crushed Glass

3283.25 Satin Black w/White Crushed Glass

3283.27 Coffee Bronze w/Amber Crushed Glass



3283.25

vines™

Organically sweeping curves undulate in flowing vine-like configurations on which illuminated glass seedpods extend from the softly intersecting branches.

3285

Vines Large LED Pendant

46" H x 158 1/2" W x 49 1/2" D

Shade: Glass

6 3/4" H x 2 1/2" W x 1 3/4" D

Canopy: (2) 2" H x 5" DIA w/6' Adjustable Cord/Cable

Output: 26pcs LED; 26W; 2,900 Lumens

(2,050 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/(2) LED Drivers in (2) Canopies

Dimming: Electronic Low Voltage (ELV) and Standard

(TRIAC) Incandescent (at 120VAC only), or 0-10V


3285.03 Satin White w/White Crushed Glass

3285.25 Satin Black w/White Crushed Glass

3285.27 Coffee Bronze w/Amber Crushed Glass



3285.03

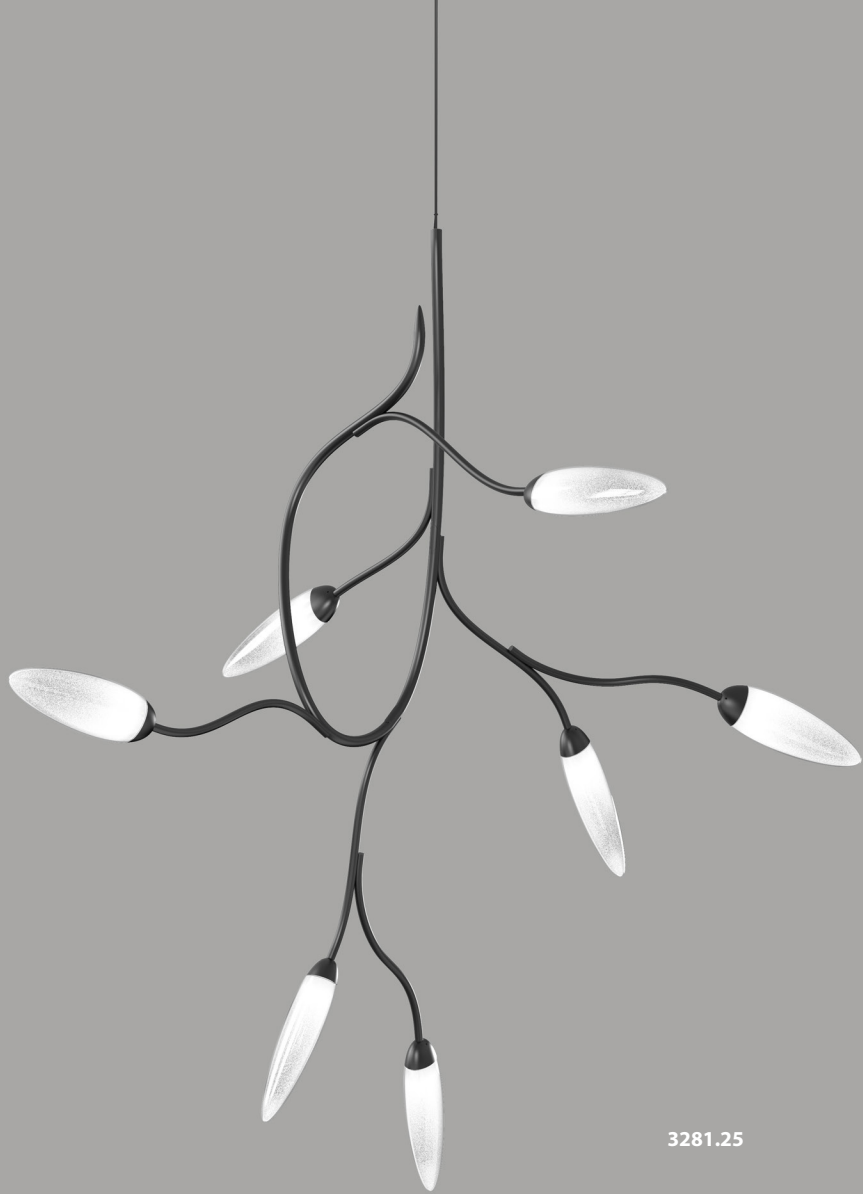

3281.25

vines™

3281

Vines Small LED Pendant

48" H x 38 1/4" W x 26 3/4" D

Shade: Glass

6 3/4" H x 2 1/2" W x 1 3/4" D

Canopy: 1/2" H x 4 1/2" DIA w/6" Adjustable Cord/Cable

Output: 7pcs LED; 7W; 800 Lumens (560 Net Lumens);

Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)

Incandescent (at 120VAC only), or 0-10V

3281.03 Satin White w/White Crushed Glass

3281.25 Satin Black w/White Crushed Glass

3281.27 Coffee Bronze w/Amber Crushed Glass



3281.03

SCULPTURAL | SONNEMAN
A WAY OF LIGHT



vines™

Available in three finishes with white or amber glass diffusers, featuring refracting crushed glass interiors.

3287

Vines LED Semi-Flush

16" H x 55 1/4" W x 51 1/2" D

Shade: Glass

6 3/4" H x 2 1/2" W x 1 3/4" D

Canopy: 2" H x 5" DIA w/6' Adjustable Cord/Cable

Output: 17pcs LED; 17W; 1,900 Lumens

(1,350 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and

Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

3287.03 Satin White w/White Crushed Glass

3287.25 Satin Black w/White Crushed Glass

3287.27 Coffee Bronze w/Amber Crushed Glass



3082.25K

Multiple U.S. and foreign patents granted and pending.



parisone™

As though blown from an artisan's tube in a single breath, the fluid glass is formed from a funnel-like shape in a continuous flowing volume. Three stems connected in a triangular relationship to each other position the glass within an asymmetrical volume. The relationship of the glasses changes as rotation and line of sight are altered.

3082

Parisone LED Cluster Pendant

21 1/4" H x 25 3/4" DIA

Shade: Glass

7 1/2" H x 4 1/2" DIA

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord

Output: 3pcs LED; 21W; 2,000 Lumens

(1,400 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC Input w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent

3082.03C Satin White w/Clear Glass


3082.03W Satin White w/White Etched Cased Glass

3082.25K Satin Black w/Smoke Glass


3082.25W Satin Black w/White Etched Cased Glass

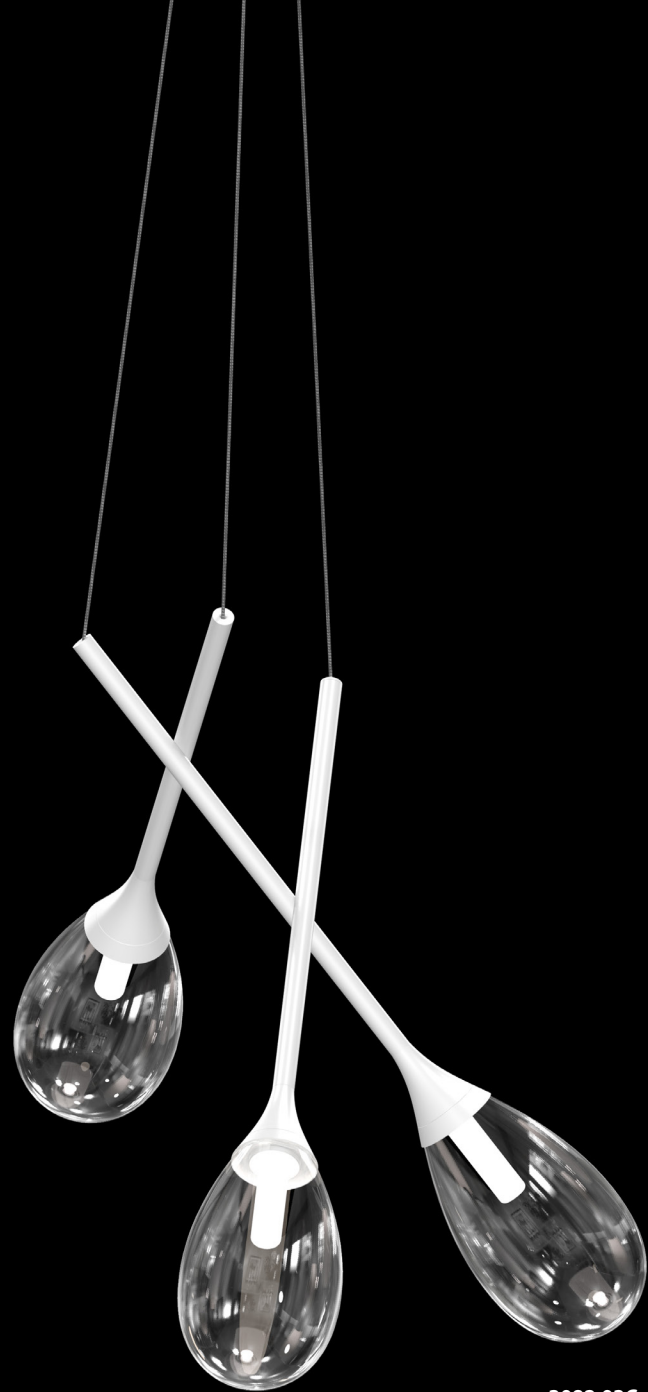

3082.03C

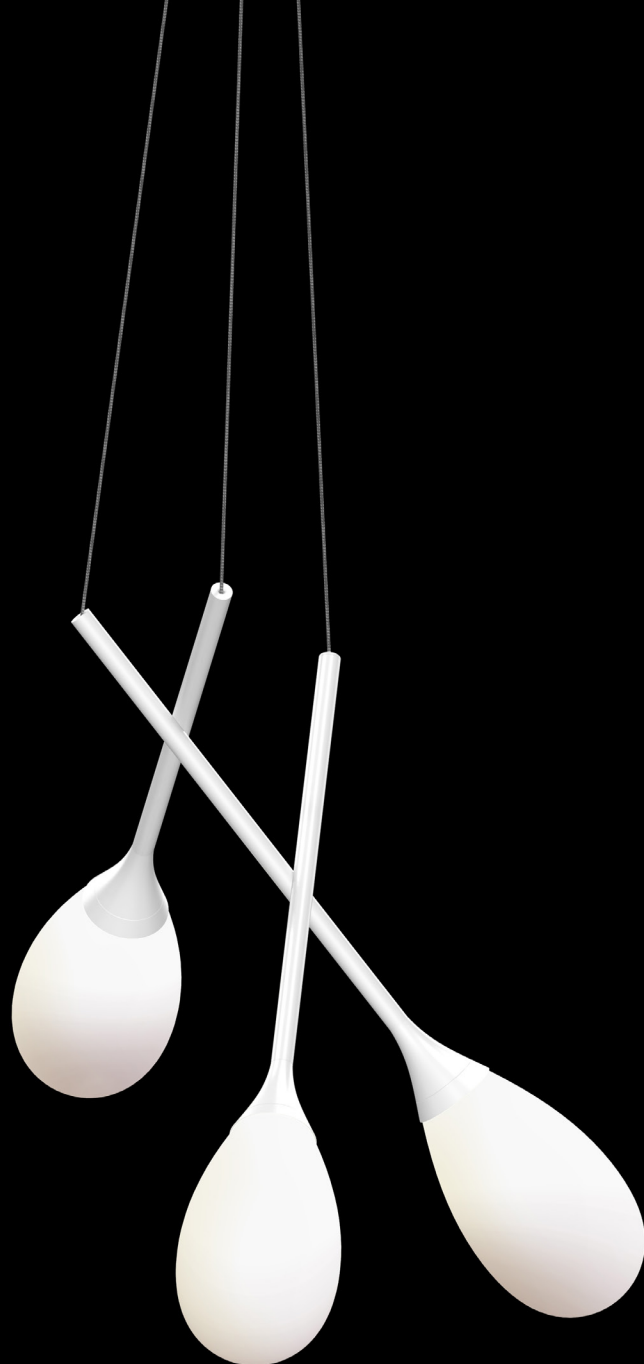

3082.03W

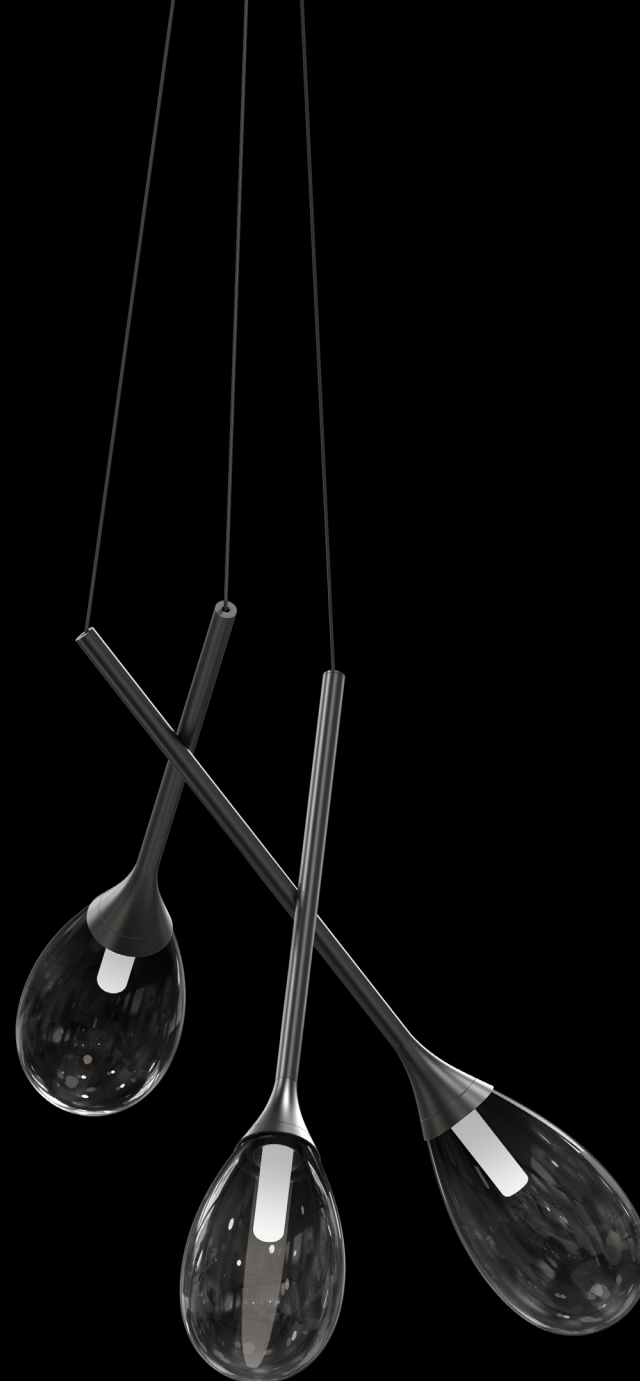

3082.25K



3082.25W

parisone™

3082

Parisone LED Cluster Pendant

21 1/4" H x 25 3/4" DIA

Shade: Glass

7 1/2" H x 4 1/2" DIA

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord

Output: 3pcs LED; 21W; 2,000 Lumens

(1,400 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC Input w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent


3082.03C Satin White w/Clear Glass

3082.03W Satin White w/White Etched Cased Glass

3082.25K Satin Black w/Smoke Glass

3082.25W Satin Black w/White Etched Cased Glass

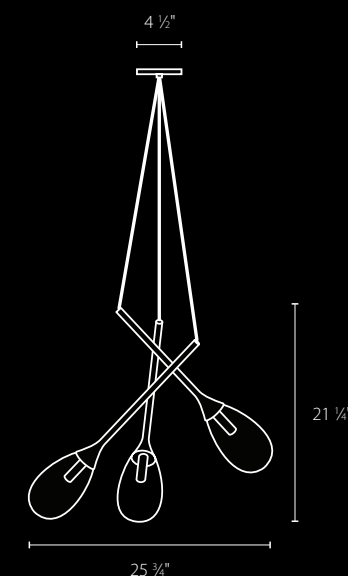

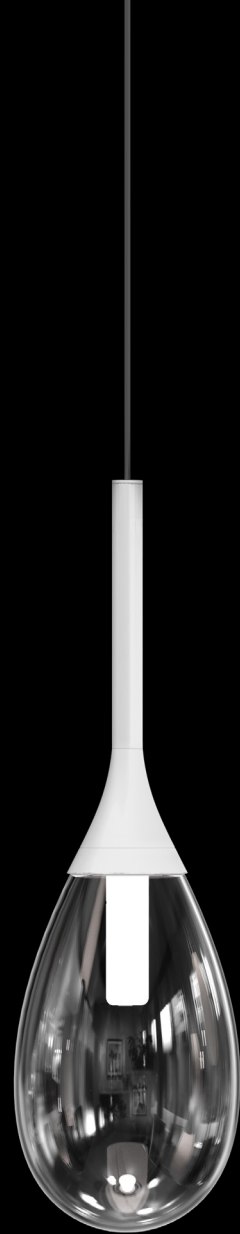

3081.03C



3083.25W



3085.25K

parisone™

3081

Parisone LED Pendant

15 ½" H x 4 ½" DIA
Shade: Glass
7 ½" H x 4 ½" DIA
Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord
Output: LED; 9W; 850 Lumens (595 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 3081.03C** Satin White w/Clear Glass
- 3081.03W** Satin White w/White Etched Cased Glass
- 3081.25K** Satin Black w/Smoke Glass
- 3081.25W** Satin Black w/White Etched Cased Glass

3083

Parisone 3-Light LED Pendant

15 ½" H x 14" DIA
Shade: Glass
7 ½" H x 4 ½" DIA
Canopy: 1 ¼" H x 12" DIA w/10' Adjustable Cord
Output: 3pcs LED; 21W; 2,000 Lumens
(1,400 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent


- 3083.03C** Satin White w/Clear Glass
- 3083.03W** Satin White w/White Etched Cased Glass
- 3083.25K** Satin Black w/Smoke Glass
- 3083.25W** Satin Black w/White Etched Cased Glass

3085

Parisone 5-Light LED Pendant

15 ½" H x 17" DIA
Shade: Glass
7 ½" H x 4 ½" DIA
Canopy: 1 ¼" H x 15" DIA w/10' Adjustable Cord
Output: 5pcs LED; 35W; 3,300 Lumens
(2,310 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

- 3085.03C** Satin White w/Clear Glass
- 3085.03W** Satin White w/White Etched Cased Glass
- 3085.25K** Satin Black w/Smoke Glass
- 3085.25W** Satin Black w/White Etched Cased Glass

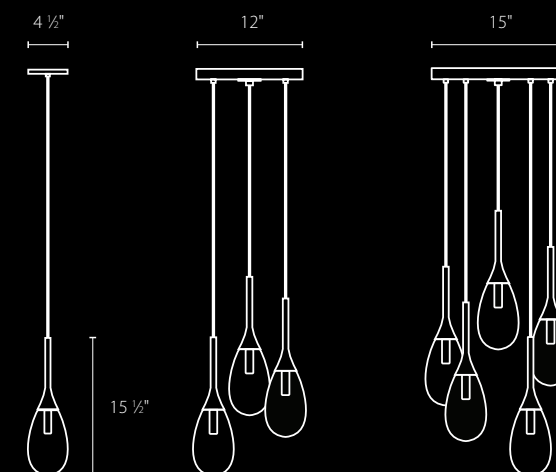



friso™

A softly shaped volume, realized in clear ribbed glass, dramatically reveals a white luminous core within. Available as single or multiple pendants.

3101

Friso LED Pendant

15 3/4" H x 6 3/4" DIA

Shade: Clear Glass

13 1/4" H x 6 3/4" DIA

Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord

Output: LED; 10W; 1,100 Lumens

(680 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3101.25 Satin Black

3101.35 Polished Nickel

3103

Friso 3-Light LED Pendant

15 3/4" H x 16" DIA

Shade: Clear Glass

13 1/4" H x 6 3/4" DIA

Canopy: 1 1/4" H x 12" DIA w/10' Adjustable Cord

Output: 3pcs LED; 30W; 3,000 Lumens

(1,900 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

3103.25 Satin Black

3103.35 Polished Nickel



(2) 3103.35



friso[™] aro

A softly shaped volume, realized in clear ribbed glass, dramatically reveals a white luminous core within. Set on a cylindrical downlight and within a finely scaled forged rod frame, this elegant pendant provides ambient glow as well as direct illumination.

3102

Friso Aro LED Pendant

22 1/2" H x 12" DIA

Shade: Clear Glass

13 1/4" H x 6 3/4" DIA

Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord

Output: 2pcs LED; 20W; 2,100 Lumens (total),

650 Lumens down (1,380 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

3102.25 Satin Black

3102.35 Polished Nickel

3102.35



3102.25

MULTI-FORMS

SONNEMAN
A WAY OF LIGHT

77



3111

Meclisse LED Pendant

9" DIA

Shade: Glass; 9" DIA X 1" D

Canopy: 1/2" H X 4 1/2" DIA w/10' Adjustable Cord

Output: LED; 15W; 1,910 Lumens

(1,340 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 3111.01C** Polished Chrome w/Clear Glass
- 3111.01E** Polished Chrome w/Etched Glass
- 3111.25C** Satin Black w/Clear Glass
- 3111.25E** Satin Black w/Etched Glass

3113

Meclisse 3-Light LED Pendant

9" DIA X 1" D

Shade: Glass; 9" DIA X 1" D

Canopy: 1 1/4" H X 12" DIA w/10' Adjustable Cord

Output: 3pcs LED; 30W; 3,650 Lumens

(2,560 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

- 3113.01C** Polished Chrome w/Clear Glass
- 3113.01E** Polished Chrome w/Etched Glass
- 3113.25C** Satin Black w/Clear Glass
- 3113.25E** Satin Black w/Etched Glass

3115

Meclisse 5-Light LED Pendant

9" DIA X 1" D

Shade: Glass; 9" DIA X 1" D

Canopy: 1 1/4" H X 15" DIA w/10' Adjustable Cord

Output: 5pcs LED; 50W; 6,100 Lumens

(4,270 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

- 3115.01C** Polished Chrome w/Clear Glass
- 3115.01E** Polished Chrome w/Etched Glass
- 3115.25C** Satin Black w/Clear Glass
- 3115.25E** Satin Black w/Etched Glass

3113.01C


meclisse™

Circular medallions shield an LED illuminated core, reflecting dazzling illumination through the planes of a ribbed glass disc. Suspended from lariats as singles or clustered in multiples, Meclisse pendants rotate freely to form stunning arrays of spectacular arrangements.



3115.25C

meclisse™

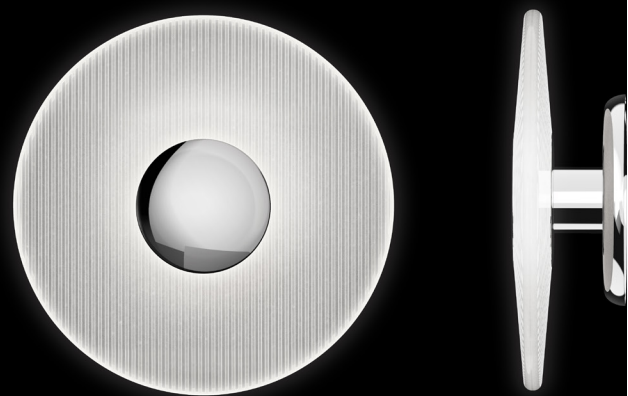

3110.01E

3110

Meclisse LED Sconce

9" DIA
Shade: Glass; 9" DIA X 1" D
Extension: 2 3/4"
Wall Plate: 4 1/2" DIA X 1 1/2" D
Output: LED; 15W; 1,910 Lumens (1,340 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA

3110.01C Polished Chrome w/Clear Glass
3110.01E Polished Chrome w/Etched Glass
3110.25C Satin Black w/Clear Glass
3110.25E Satin Black w/Etched Glass



3110.01C

MULTI-FORMS

SONNEMAN
A WAY OF LIGHT

81



movile™

Poised in positions of rotation about their vertical axis, these arced stems support modern lighted shapes of subtle curves and dramatic presence in perfect counterbalance.

1773

Movile LED Pendant

25 1/4" H x 61" W x 4 1/2" D

Shade: Metal

(3) 3 1/2" H x 7 3/4" W x 4" D

(1) 2 1/2" H x 10" W x 4" D

(2) 3" H x 11 1/4" W x 3 1/2" D

Canopy: 1/2" H x 4 1/2" DIA w/(3) 12" + (1) 6" Stem Kit

Output: 6pcs LED; 21W; 2,100 Lumens

(1,100 Net Lumens); Warm White (3000K);90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

1773.03 Satin White

1773.25 Satin Black

1773.25

papillons™

Delicately floating in suspension, these iconically modern, whimsical shapes bring the pathos of Modernism and the colors of Mondrian and Miró to the technology of today's art of light. Available in several configurations, these light sculptures offer scale to modern primitive environments that playfully allow the activity of movement within its space.

2904

Papillons 4-Light Large LED Pendant

26" H x 53 1/2" DIA
Shade: Metal
(1) 5" H x 11 3/4" W x 4" D
(1) 6 3/4" H x 12 1/2" W x 5 1/4" D
(1) 4 1/2" H x 16" W x 3 1/2" D
(1) 4 3/4" H x 12 1/2" W x 3 3/4" D
Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord
Output: 4pcs LED; 22W; 2,000 Lumens
(1,150 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2904.25K Satin Black w/Satin Black Shades
- 2904.25M Satin Black w/Assorted Shade Colors
- 2904.25W Satin Black w/Satin White Shades

2902

Papillons 4-Light LED Pendant

19" H x 31" DIA
Shade: Metal
(1) 5" H x 11 3/4" W x 4" D
(1) 6 3/4" H x 12 1/2" W x 5 1/4" D
(1) 4 1/2" H x 16" W x 3 1/2" D
(1) 4 3/4" H x 12 1/2" W x 3 3/4" D
Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord
Output: 4pcs LED; 22W; 2,000 Lumens
(1,300 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2902.25K Satin Black w/Satin Black Shades
- 2902.25M Satin Black w/Assorted Shade Colors
- 2902.25W Satin Black w/Satin White Shades





papillons™

2909

Papillons 24-Light Swag LED Pendant

6 ¾" H x 36" to 192" MAX DIA

Shade: Metal

(6) 5" H x 11 ¾" W x 4" D

(6) 6 ¾" H x 12 ½" W x 5 ¼" D

(6) 4 ½" H x 16" W x 3 ½" D

(6) 4 ¾" H x 12 ½" W x 3 ¾" D

Canopy: 1 ¾" H x 14" DIA w/10' Adjustable Cord

Output: 24pcs LED; 100W; 9,600 Lumens

(5,520 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/(2) LED Drivers in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only); or 0-10V


2909.25K Satin Black w/Satin Black Shades

2909.25M Satin Black w/Assorted Shade Colors


2909.25W Satin Black w/Satin White Shades




2909.25K

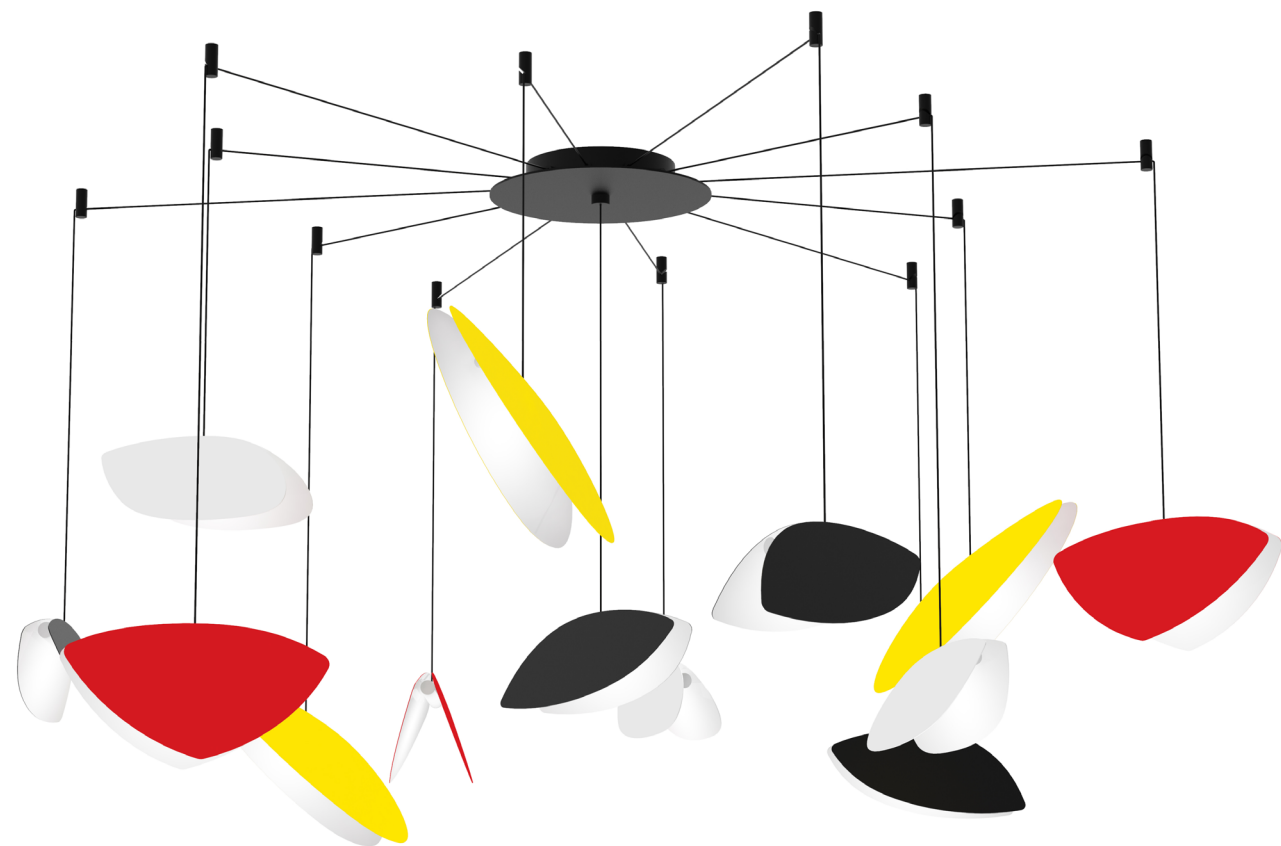

2907.25M

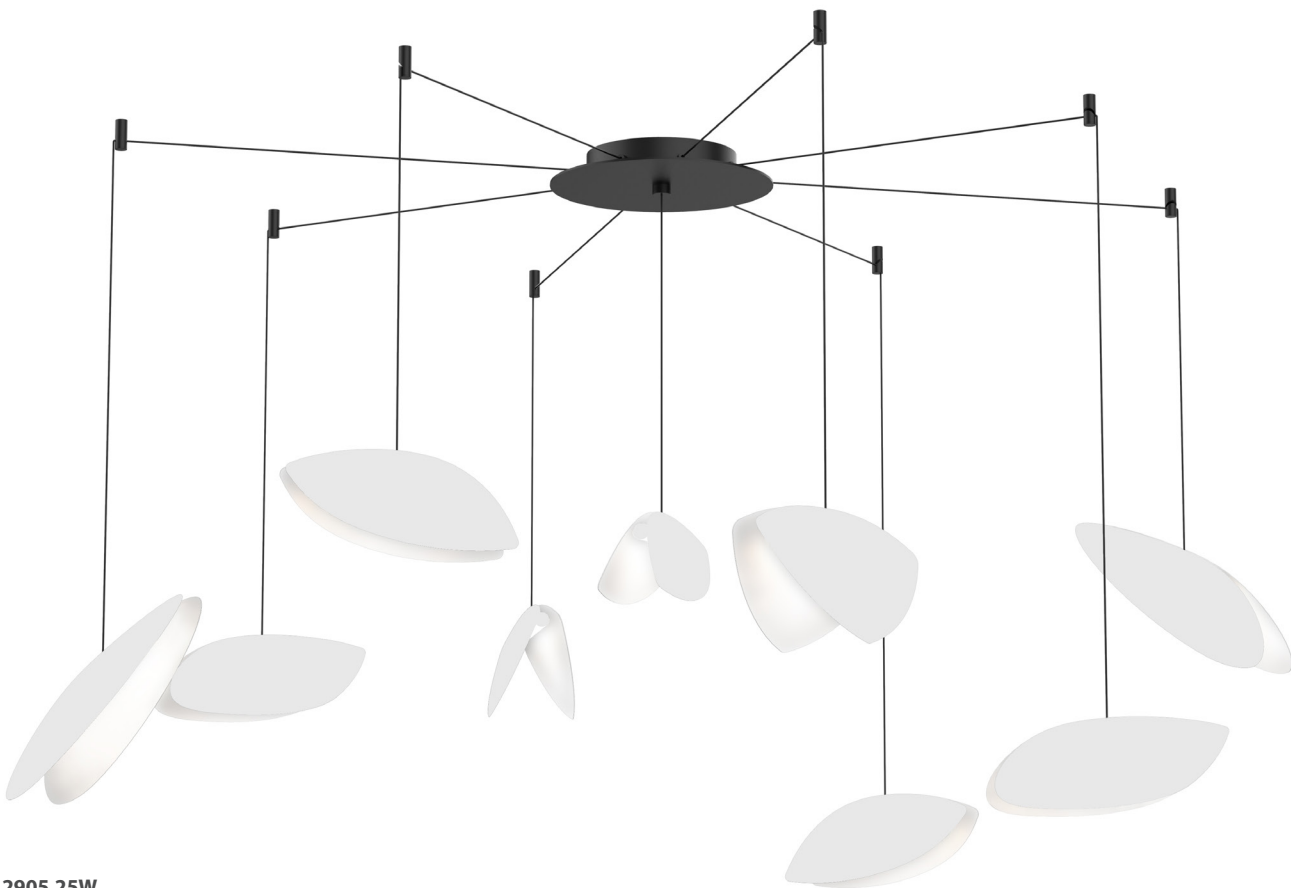

2905.25W

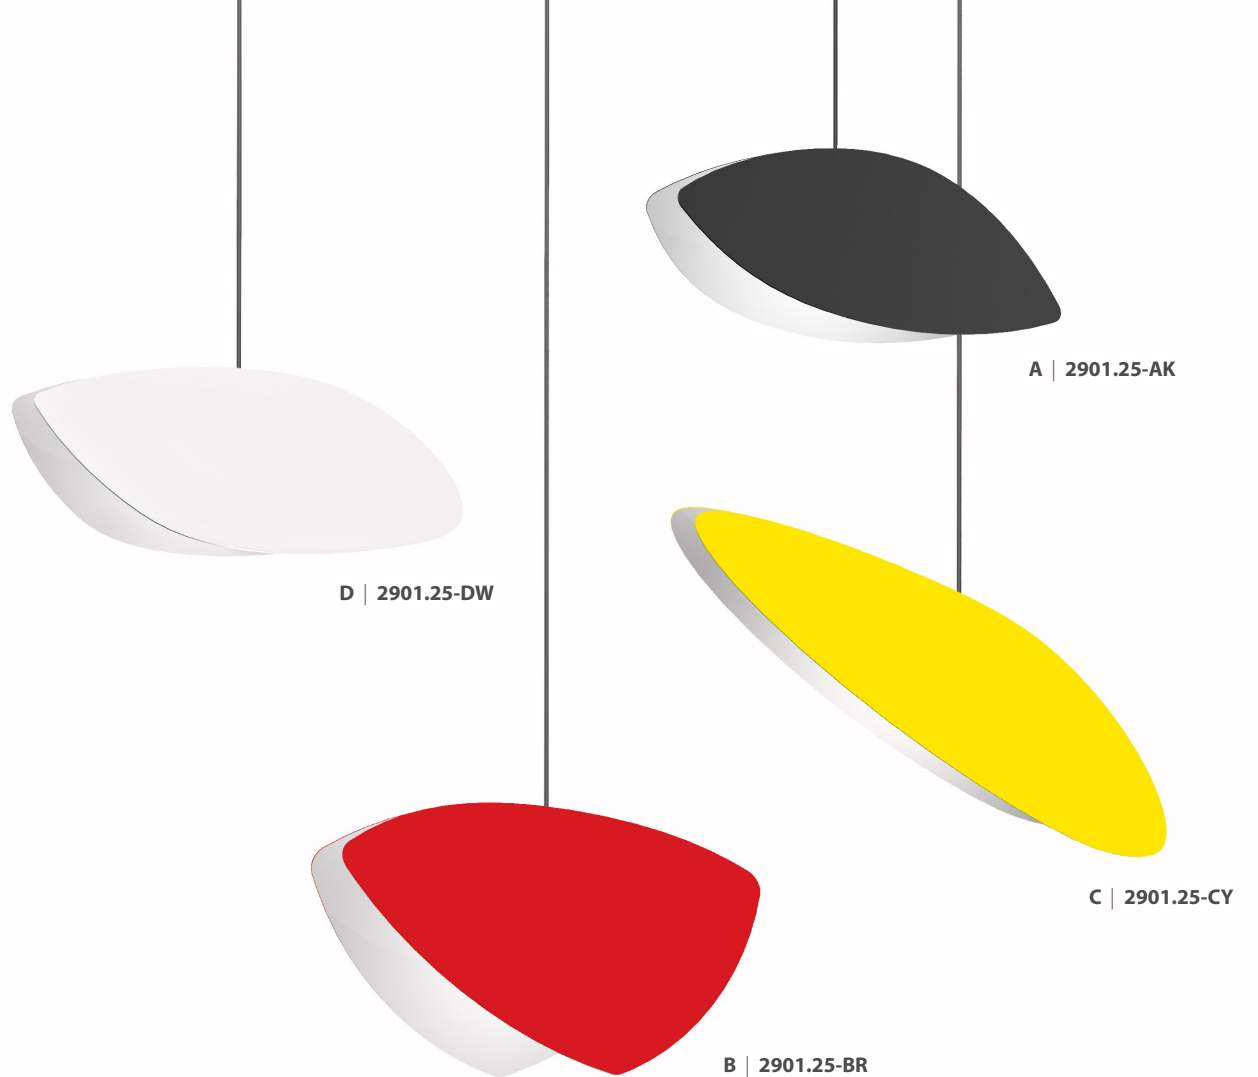

A | 2901.25-AK

D | 2901.25-DW

C | 2901.25-CY

B | 2901.25-BR

2907

Papillons 13-Light Swag LED Pendant

6 3/4" H x 30" to 192" MAX DIA

Shade: Metal

(3) 5" H x 11 3/4" W x 4" D

(4) 6 3/4" H x 12 1/2" W x 5 1/4" D

(3) 4 1/2" H x 16" W x 3 1/2" D

(3) 4 3/4" H x 12 1/2" W x 3 3/4" D

Canopy: 1 3/4" H x 12" DIA w/10' Adjustable Cord

Output: 13pcs LED; 50W; 4,800 Lumens

(2,760 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

2907.25K Satin Black w/Satin Black Shades

2907.25M Satin Black w/Assorted Shade Colors

2907.25W Satin Black w/Satin White Shades

2905

Papillons 9-Light Swag LED Pendant

6 3/4" H x 24" to 192" MAX DIA

Shade: Metal

(2) 5" H x 11 3/4" W x 4" D

(2) 6 3/4" H x 12 1/2" W x 5 1/4" D

(3) 4 1/2" H x 16" W x 3 1/2" D

(2) 4 3/4" H x 12 1/2" W x 3 3/4" D

Canopy: 1 3/4" H x 12" DIA w/10' Adjustable Cord

Output: 9pcs LED; 38W; 3,600 Lumens

(2,070 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

2905.25K Satin Black w/Satin Black Shades

2905.25M Satin Black w/Assorted Shade Colors

2905.25W Satin Black w/Satin White Shades

2901

Papillons LED Pendant

Shade: Metal

5" H x 11 3/4" W x 4" D (for -Ax option)

6 3/4" H x 12 1/2" W x 5 1/4" D (for -Bx option)

4 1/2" H x 16" W x 3 1/2" D (for -Cx option)

4 3/4" H x 12 1/2" W x 3 3/4" D (for -Dx option)

Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord

Output: LED; 8W; 800 Lumens

(520 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

Shade A

2901.25-AK Satin Black w/Satin Black Shade

2901.25-AW Satin Black w/Satin White Shade

Shade B

2901.25-BK Satin Black w/Satin Black Shade

2901.25-BR Satin Black w/Satin Red Shade

2901.25-BW Satin Black w/Satin White Shade

Shade C

2901.25-CK Satin Black w/Satin Black Shade

2901.25-CW Satin Black w/Satin White Shade

2901.25-CY Satin Black w/Satin Yellow Shade

Shade D

2901.25-DK Satin Black w/Satin Black Shade

2901.25-DW Satin Black w/Satin White Shade

papillons™

tela™ linear system

Elegantly draped along the axis of a tubular LED source, this flowing reflector directs the linear illumination downward. Tela can be used singularly or in an end-to-end linear configuration of multiple lengths as desired. Its sophisticated simplicity brings a sculptural flowing rhythm along a surface or within a linear space.

3121

Tela LED Pendant

3 1/2" H x 40" W x 3 3/4" D

Shade: Metal

3 1/2" H x 37 3/4" W x 3 3/4" D

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord/Cable

Output: LED; 15W; 2,100 Lumens

(1,470 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

3121.03 Satin White

3121.18 Dove Gray

3121.25 Satin Black



3121.25

ARCHITECTURAL | SONNEMAN
A WAY OF LIGHT



tela™ linear system

Tela can be used singularly or in an end-to-end linear configuration of multiple lengths as desired. Shown here, two Tela Double Pendants are joined in the center with a single Tela Coupler Kit.

3122

Tela LED Double Pendant

3 1/2" H x 78 3/4" W x 3 3/4" D

Shade: Metal

3 1/2" H x 37 3/4" W x 3 3/4" D

Canopy: 2" H x 5" DIA W/6' Adjustable Cord/Cable

Output: 2pcs LED; 30W; 4,200 Lumens

(2,940 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

3122.03 Satin White

3122.18 Dove Gray


3122.25 Satin Black

(2) 3122.25 + (1) CUP.3121.25

ARCHITECTURAL

SONNEMAN
A WAY OF LIGHT

tela™ linear system

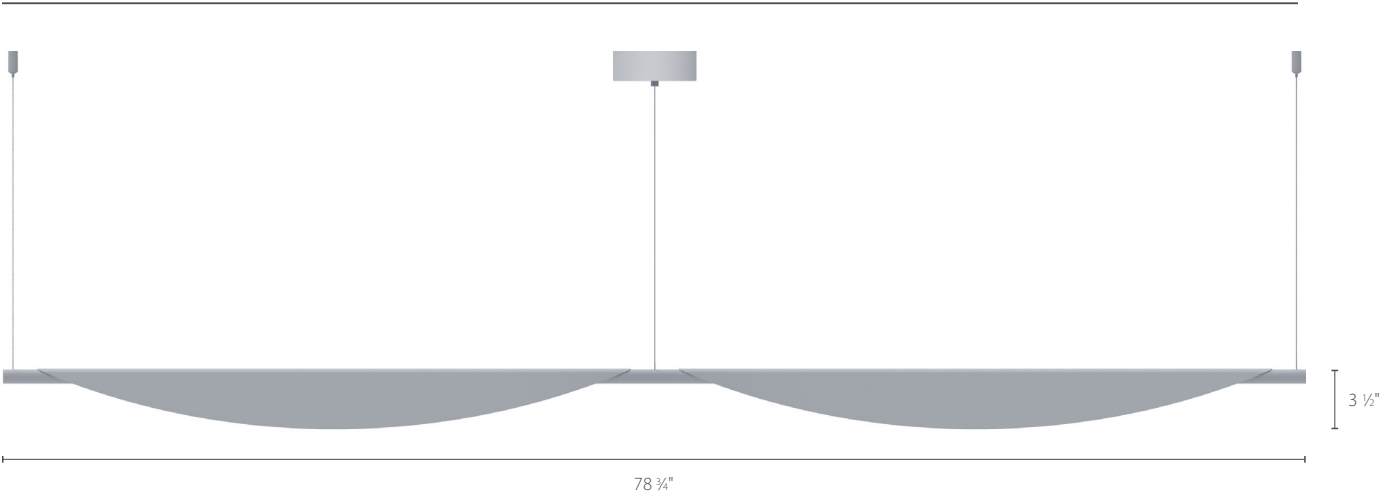


3122.18

3122 Tela LED Double Pendant

3 1/2" H x 78 3/4" W x 3 3/4" D
Shade: Metal
3 1/2" H x 37 3/4" W x 3 3/4" D
Canopy: 2" H x 5" DIA w/6' Adjustable Cord/Cable
Output: 2pcs LED; 30W; 4,200 Lumens
(2,940 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

- 3122.03 Satin White
- 3122.18 Dove Gray
- 3122.25 Satin Black

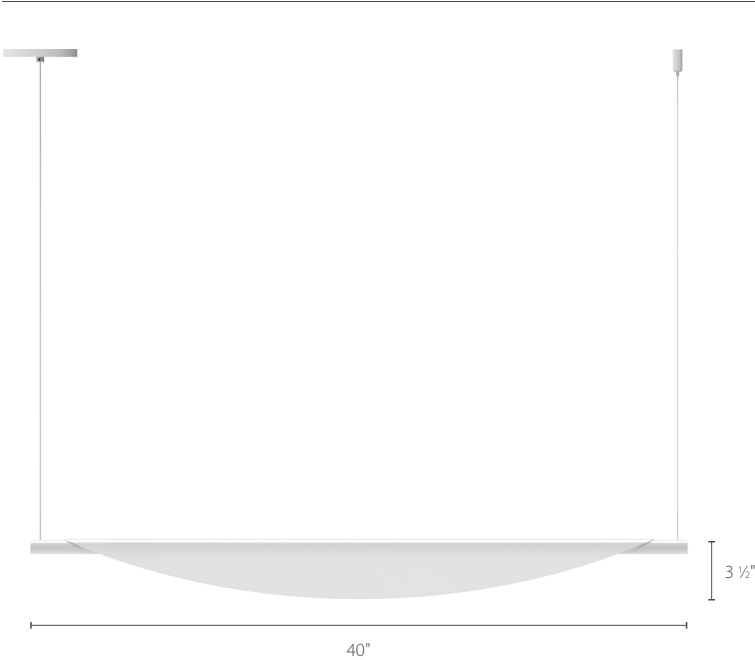


3121.03

3121 Tela LED Pendant

3 1/2" H x 40" W x 3 3/4" D
Shade: Metal
3 1/2" H x 37 3/4" W x 3 3/4" D
Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord/Cable
Output: LED; 15W; 2,100 Lumens (1,470 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

- 3121.03 Satin White
- 3121.18 Dove Gray
- 3121.25 Satin Black

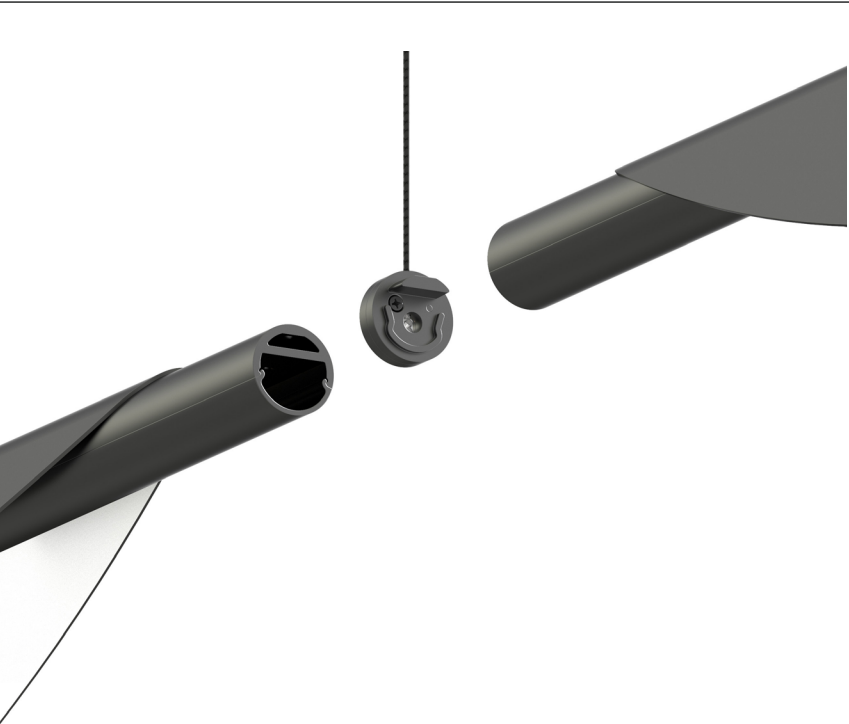

CUP.3121


Tela Coupler Kit
3/4" DIA w/6' Field-Cuttable Cable
Material: Metal

- CUP.3121.03 Satin White
- CUP.3121.18 Dove Gray
- CUP.3121.25 Satin Black


Multiple Tela pendants can be connected end-to-end using the Tela Coupler Kit to build a continuous linear fixture of unlimited length.

NOTE: The Tela Coupler is a mechanical coupler and not electrical, so a power supply is necessary for each fixture.

Example: Connecting (2) Tela LED Double Pendants (3122) w/Tela Coupler Kit (CUP.3121)

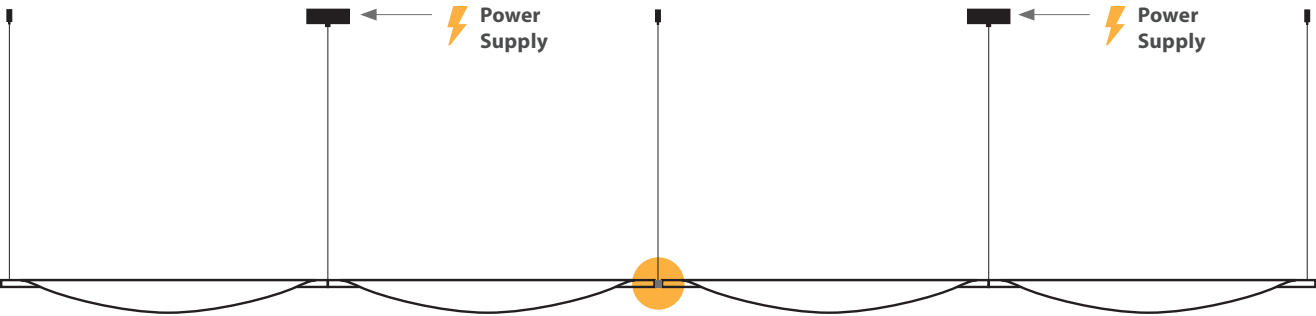

Example: Connecting (1) Tela LED Double Pendant (3122) and (1) Tela LED Pendant (3121) w/Tela Coupler Kit (CUP.3121)

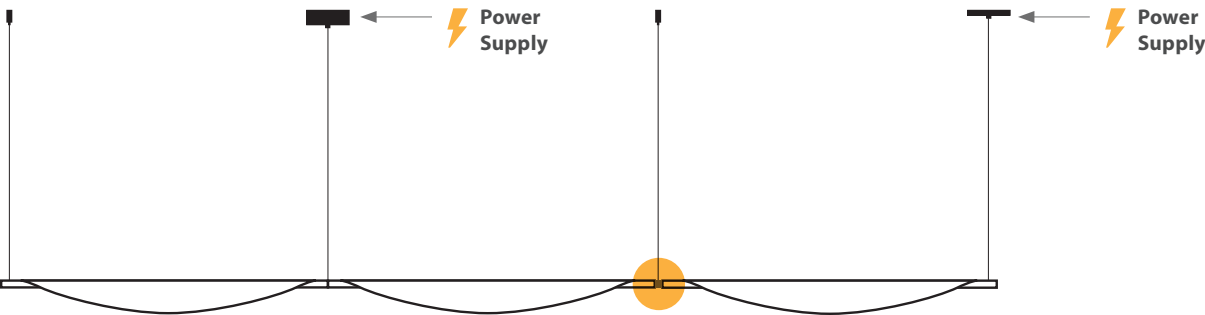



1767.03

1765.25

1766.18

malibu discs™ pendant + wall

Flared opposing discs form a sweeping sculptural LED pendant in four diameters. Intended to be hung individually or clustered in an arrangement of multiple sizes.

1768.25

malibu discs™

1765

Malibu Discs 7 1/2" LED Pendant

7 1/2" H x 7 1/2" W x 3 3/4" D

Shade: Aluminum

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord

Output: LED; 16W; 1,500 Lumens

(1,050 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box


Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

1765.03 Satin White

1765.18 Dove Gray

1765.25 Satin Black



1766

Malibu Discs 10" LED Pendant

10" H x 10" W x 4 3/4" D

Shade: Aluminum

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord

Output: LED; 22W; 2,000 Lumens

(1,400 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box


Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

1766.03 Satin White

1766.18 Dove Gray

1766.25 Satin Black

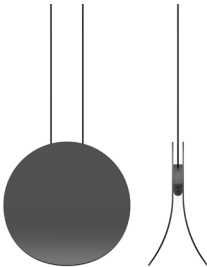

1767

Malibu Discs 14" LED Pendant

14" H x 14" W x 6 1/4" D

Shade: Aluminum

Canopy: 1 3/4" H x 5" DIA w/6' Adjustable Cord

Output: LED; 26W; 2,400 Lumens

(1,680 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)


and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

1767.03 Satin White

1767.18 Dove Gray

1767.25 Satin Black



1768

Malibu Discs 18" LED Pendant

18" H x 18" W x 7 3/4" D

Shade: Aluminum

Canopy: 1 3/4" H x 5" DIA w/6' Adjustable Cord

Output: LED; 32W; 3,000 Lumens

(2,100 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)


and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

1768.03 Satin White

1768.18 Dove Gray

1768.25 Satin Black

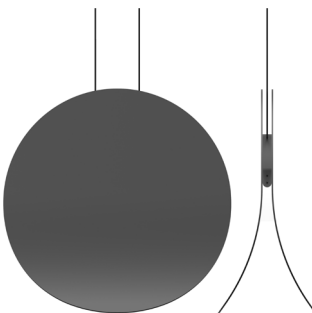

1761

Malibu Discs 14" LED Sconce

14" DIA

Shade: Aluminum

Extension: 2 3/4"

Wall Plate: 5 1/2" H x 5" W x 1" D

Output: 2pcs LED; 25W; 2,300 Lumens

(1,610 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent


(at 120VAC only), or 0-10V

ADA

1761.03 Satin White

1761.18 Dove Gray

1761.25 Satin Black



1760

Malibu Discs 10" LED Sconce

10" DIA

Shade: Aluminum

Extension: 2 1/4"

Wall Plate: 4 3/4" H x 4 3/4" W x 1" D

Output: 2pcs LED; 18W; 1,700 Lumens

(1,190 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)




or Standard (TRIAC) Incandescent

ADA

1760.03 Satin White

1760.18 Dove Gray

1760.25 Satin Black

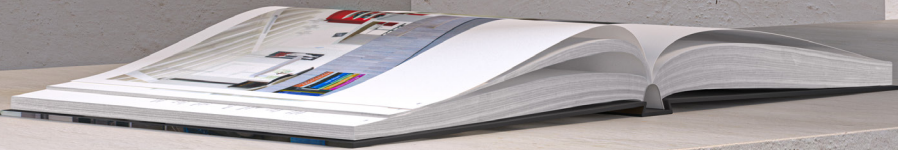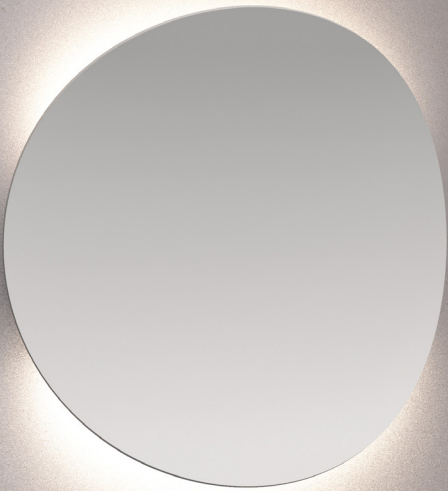



coral surface™

Flowing sculptural shapes connect clusters of luminaires across wall or ceiling surfaces in this organically modern system of light. Dramatically undulating patterns and paths characterize connected configurations of any size, while individually mounted three-light modules highlight the flowing forms, bringing a soft approach of artistic expression to this expandable system.

2191.xx-06-02-01-02

Coral 6-Luminaire LED Surface Mount

1" H x 91" W x 32" D
Shade: Thermoplastic w/Acrylic Lenses
Output: 6pcs LED; 66W; 7,200 Lumens
(4,800 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V
ADA

2191.03-06-02-01-02 Satin White
2191.16-06-02-01-02 Bright Satin Aluminum

Includes (2) Small-Small, (1) Small-Medium,
and (2) Medium-Medium Connectors



2191.16-06-02-01-02



2191

Coral Surface LED Surface Mount

1" H x 13 1/4" W x 12 3/4" D

Shade: Thermoplastic w/Acrylic Lenses

Output: LED; 14W; 1,300 Lumens

(600 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

ADA

2191.03 Satin White

2191.16 Bright Satin Aluminum

2191.03

coral surface™

CORAL SURFACE ITEM NUMBER

Build your Coral Surface item number by specifying the desired quantity of luminaires and each connector size in the table below. **Note - Configurations with more than 6 luminaires will require multiple power supplies. For assistance contact our Contract Sales Team at contract@sonneman.com.**

Item Number:	2	1	9	1	.	0	3	-	X	X	-	X	X	-	X	X	-	X	X
	Coral Surface SKU #					Finish Options			Luminaire Quantity			Connector Quantity			Connector Quantity			Connector Quantity	
						.03 Satin White						Small-Small			Small-Medium			Medium-Medium	
						.16 Bright Satin Aluminum													



2191.03-06-02-01-02


SYSTEMS

SONNEMAN
A WAY OF LIGHT


coral surface™

system components

LUMINAIRE

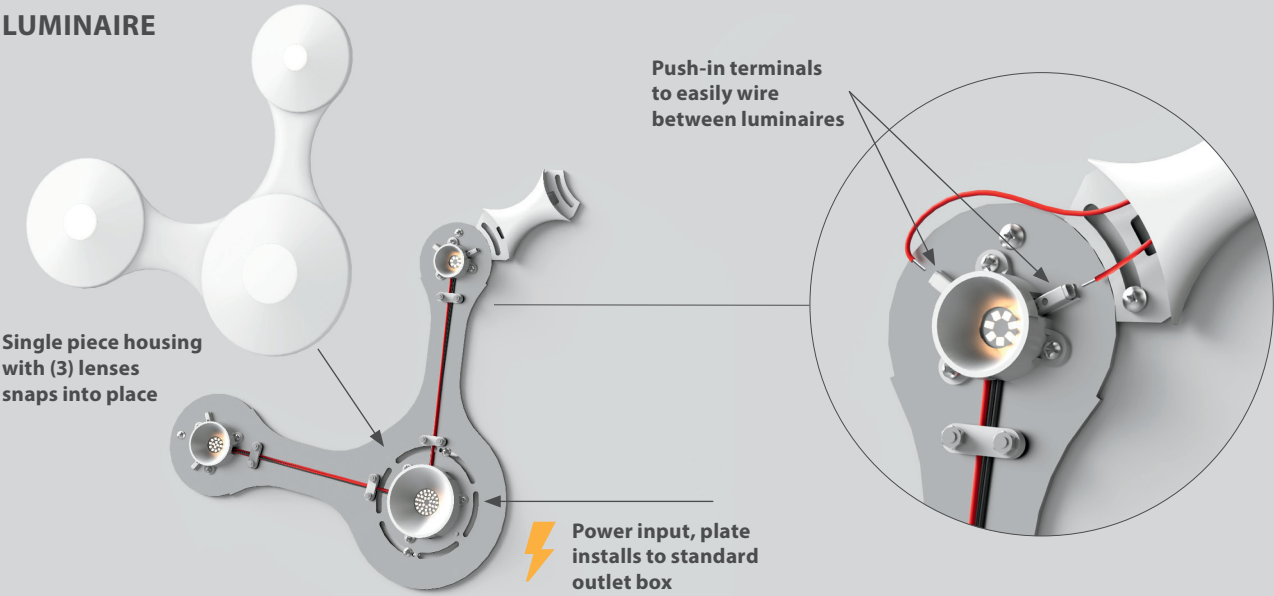

CONNECTORS

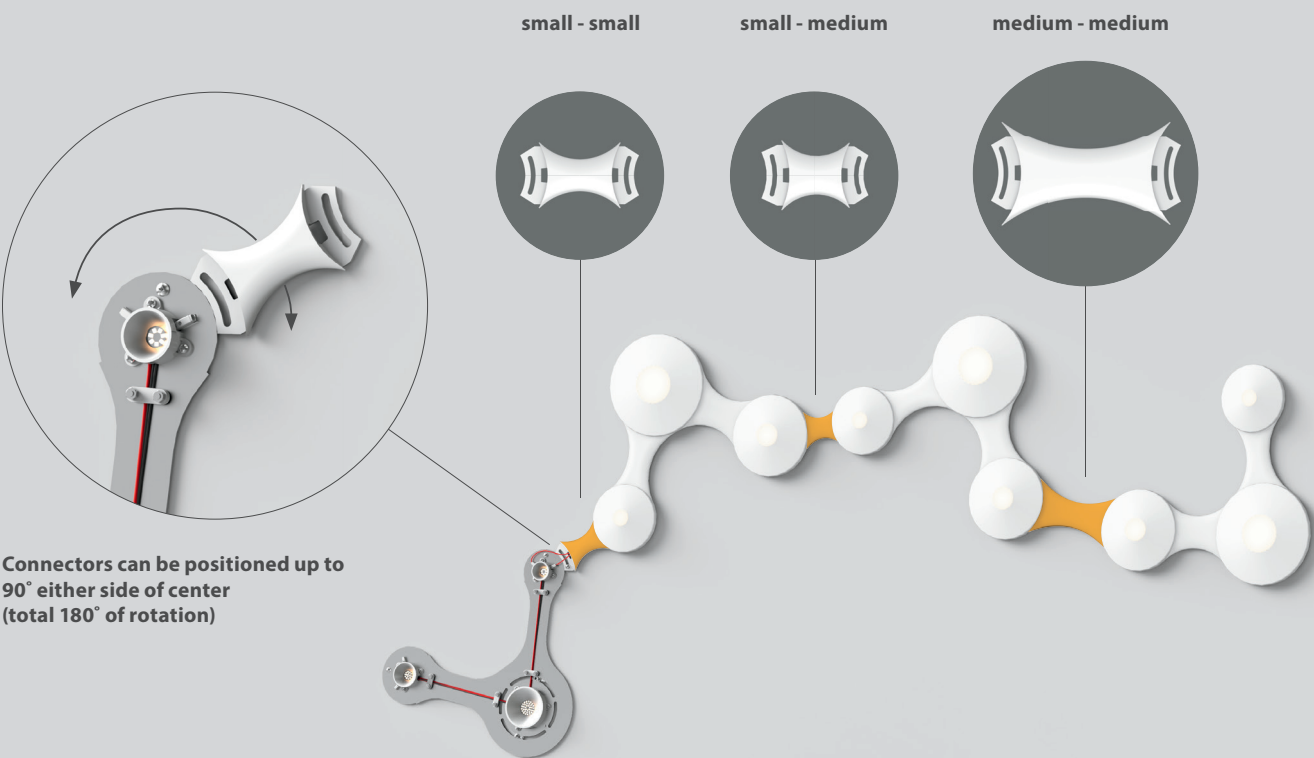


Components can be arranged in infinite configurations.

By adjusting the installation angle of the connectors, the same set of components can be installed in an infinite variety of configurations, with any of the luminaires serving as the power feed. Below are a few possibilities created from the item listed on the right.

- 2191.03-06-02-01-02**
This item number includes the following components:
- (6) Luminaires
 - (2) Small-Small Connectors
 - (1) Small-Medium Connector
 - (2) Medium-Medium Connectors

CONFIGURATIONS

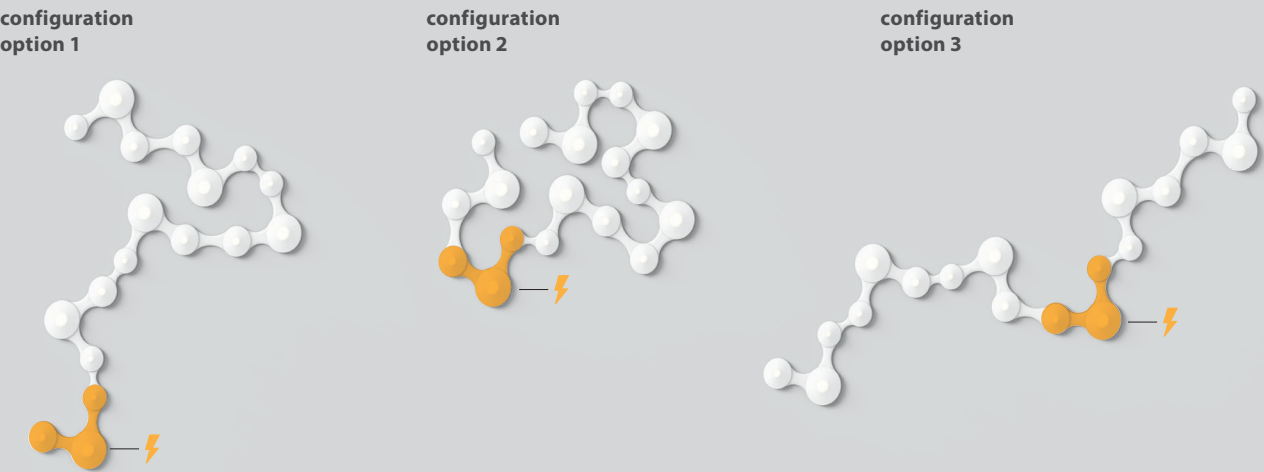

PRECONFIGURED OPTIONS

2191

Coral Surface LED Surface Mount
1" H x 13 1/4" W x 12 3/4" D
Shade: Thermoplastic w/Acrylic Lenses
Canopy: 1" H x 6" DIA
Output: LED; 14W; 1,300 Lumens (600 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V
ADA

2191.03 Satin White
2191.16 Bright Satin Aluminum

2191.xx-03-01-00-01

Coral Surface 3-Luminaire LED Surface Mount
1" H x 47" W x 15" D
Shade: Thermoplastic w/Acrylic Lenses
Canopy: 1" H x 6" DIA
Output: 3pcs LED; 33W; 3,600 Lumens (2,400 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V
ADA

2191.03-03-01-00-01 Satin White
2191.16-03-01-00-01 Bright Satin Aluminum

Includes (1) Small-Small and (1) Medium-Medium Connector

2191.xx-06-02-01-02

Coral Surface 6-Luminaire LED Surface Mount
1" H x 91" W x 32" D
Shade: Thermoplastic w/Acrylic Lenses
Canopy: 1" H x 6" DIA
Output: 6pcs LED; 66W; 7,200 Lumens (4,800 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V
ADA

2191.03-06-02-01-02 Satin White
2191.16-06-02-01-02 Bright Satin Aluminum

Includes (2) Small-Small, (1) Small-Medium, and (2) Medium-Medium Connectors

For custom configurations contact our Contract Sales Team for assistance at contract@sonneman.com.

abstraction™

Inspired by Organic Abstractionism, a thin profile is formed into sweeping curves that surround the LED light pods as it defines its sculptural path—a luminous biomorphic sculpture of organically flowing asymmetrical shapes.





abstraction™

3274

Abstraction LED Pendant

¾" H x 40" W x 32 ¾" D

Shade: Die-Cast Aluminum

¾" H x 4 ½" W x 3" D

Canopy: 1 ¼" H x 7" DIA W/6' Adjustable Cord/Cable

Output: 9pcs LED; 26W; 2,000 Lumens

(1,500 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent

3274.03 Satin White

3274.16 Bright Satin Aluminum

3274.25 Satin Black

3274.25

abstraction™

3272

Abstraction Linear LED Pendant

¾" H x 54" W x 17 ½" D
Shade: Die-Cast Aluminum
¾" H x 4 ½" W x 3" D
Canopy: 1 ¼" H x 7" DIA w/6' Adjustable Cord/Cable
Output: 8pcs LED; 26W; 1,800 Lumens
(1,350 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent

- 3272.03 Satin White
- 3272.16 Bright Satin Aluminum
- 3272.25 Satin Black




3274

Abstraction LED Pendant

¾" H x 40" W x 32 ¾" D
Shade: Die-Cast Aluminum
¾" H x 4 ½" W x 3" D
Canopy: 1 ¼" H x 7" DIA w/6' Adjustable Cord/Cable
Output: 9pcs LED; 26W; 2,000 Lumens
(1,500 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent

- 3274.03 Satin White
- 3274.16 Bright Satin Aluminum
- 3274.25 Satin Black

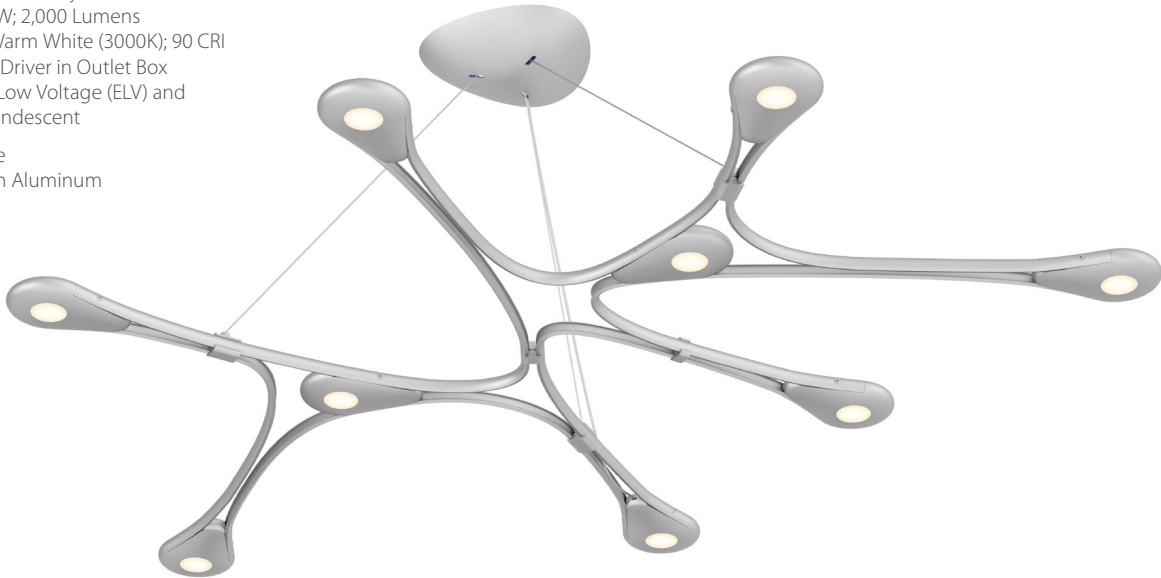



1780

Aureola LED Pendant

20 1/4" H x 20 1/4" W x 5 1/2" D

Shade: Metal

20 1/4" H x 20 1/4" W x 5 1/2" D

Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord

Output: 2pcs LED; 21W; 1,700 Lumens (total),

600 Lumens down (1,050 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

1780.03 Satin White

1780.25 Satin Black

aureola™

A controlled spread of light is reflected from the interior of this dramatically scaled tapered ring. In addition, a micro-lens below directs powerful illumination downward.




1780.25

ARCHITECTURAL

SONNEMAN
A WAY OF LIGHT

113

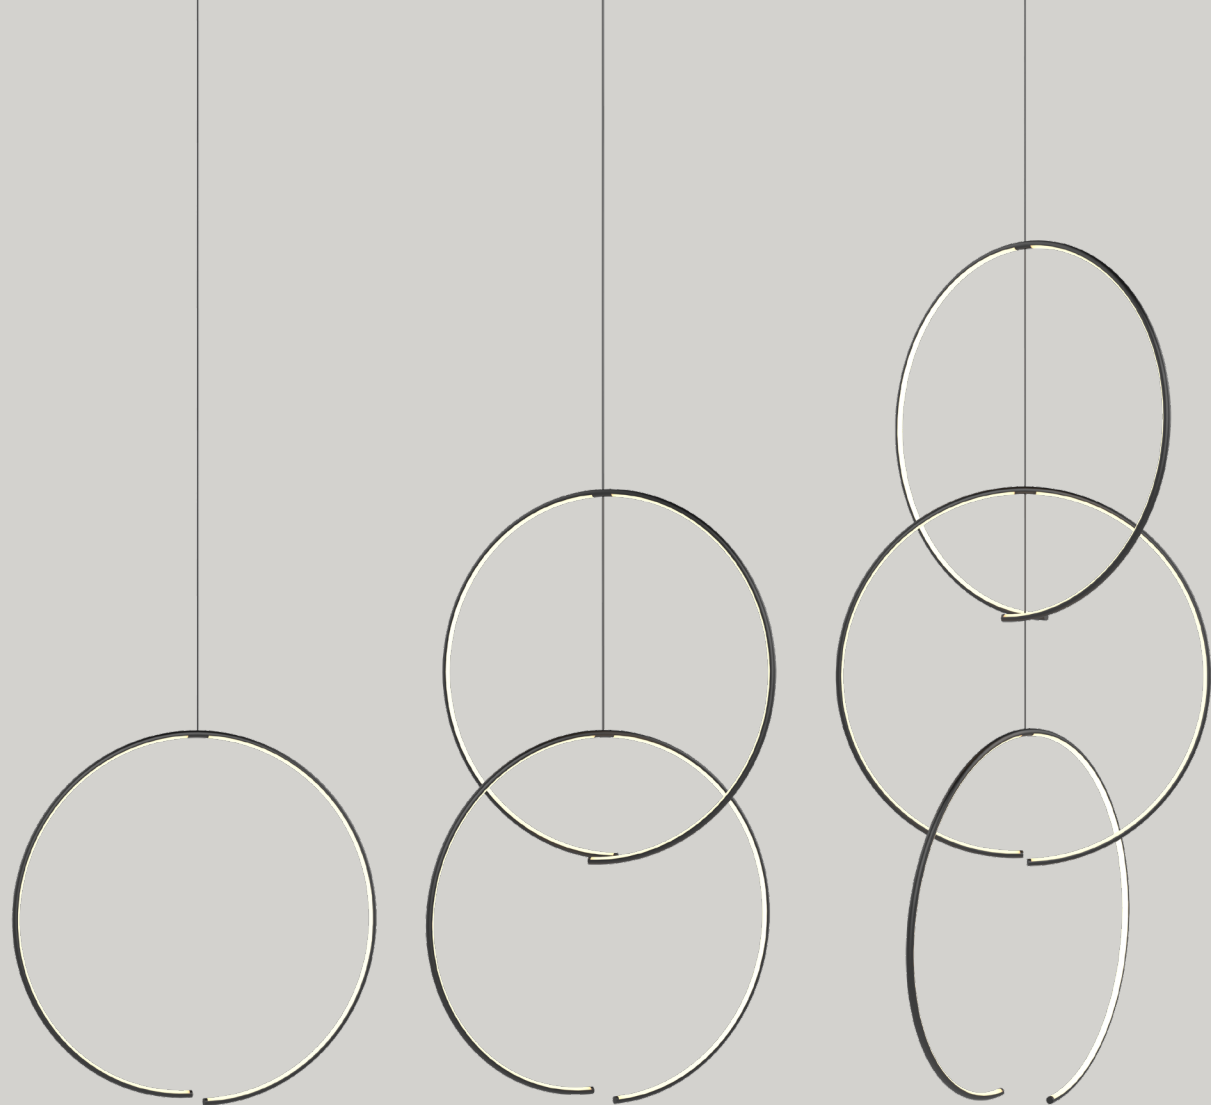

torc™

The movement of offset arcs rotate in suspension to form a modern interplay of deconstruction.

3151

Torc LED Pendant

24 ¼" H x 24 ½" W x 4 ½" D

Shade: Optical Silicone

Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord

Output: LED; 17W; 1,600 Lumens

(1,040 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

3151.03 Satin White

3151.25 Satin Black

3152

Torc LED Double Pendant

40" H x 24 ¾" DIA

Shade: Optical Silicone

Canopy: 2" H x 5" DIA w/6' Adjustable Cord

Output: 2pcs LED; 34W; 3,200 Lumens

(2,080 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

3152.03 Satin White

3152.25 Satin Black

3153

Torc LED Triple Pendant

56" H x 24 ¾" DIA

Shade: Optical Silicone

Canopy: 2" H x 5" DIA w/6' Adjustable Cord

Output: 3pcs LED; 51W; 4,800 Lumens

(3,120 Net Lumens); Warm White (3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

3153.03 Satin White

3153.25 Satin Black




3153.25

ARCHITECTURAL

SONNEMAN
A WAY OF LIGHT

115

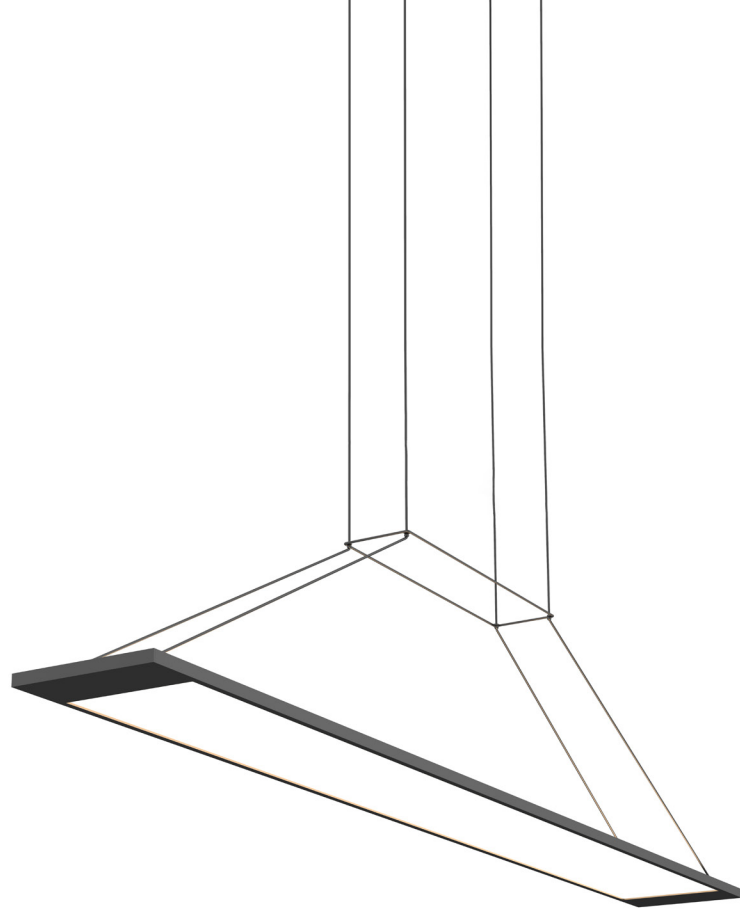

perfile™

This elegantly minimal edge-lit panel floats within the delicate tension of thin coated cables, delivering abundant luminance to the surface or task below. Perfile delivers the pristine perfection and minimal essence that defines modern functionality.

3224

Perfile LED Pendant

½" H x 40" W x 4 ¾" D

Shade: Aluminum w/LED Flat Panel

Canopy: ½" H x 12" W x 4 ½" D w/6' Adjustable Cord

Output: LED; 21W; 2,600 Lumens (1,300 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box


Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent


3224.03 Satin White

3224.16 Bright Satin Aluminum

3224.25 Satin Black

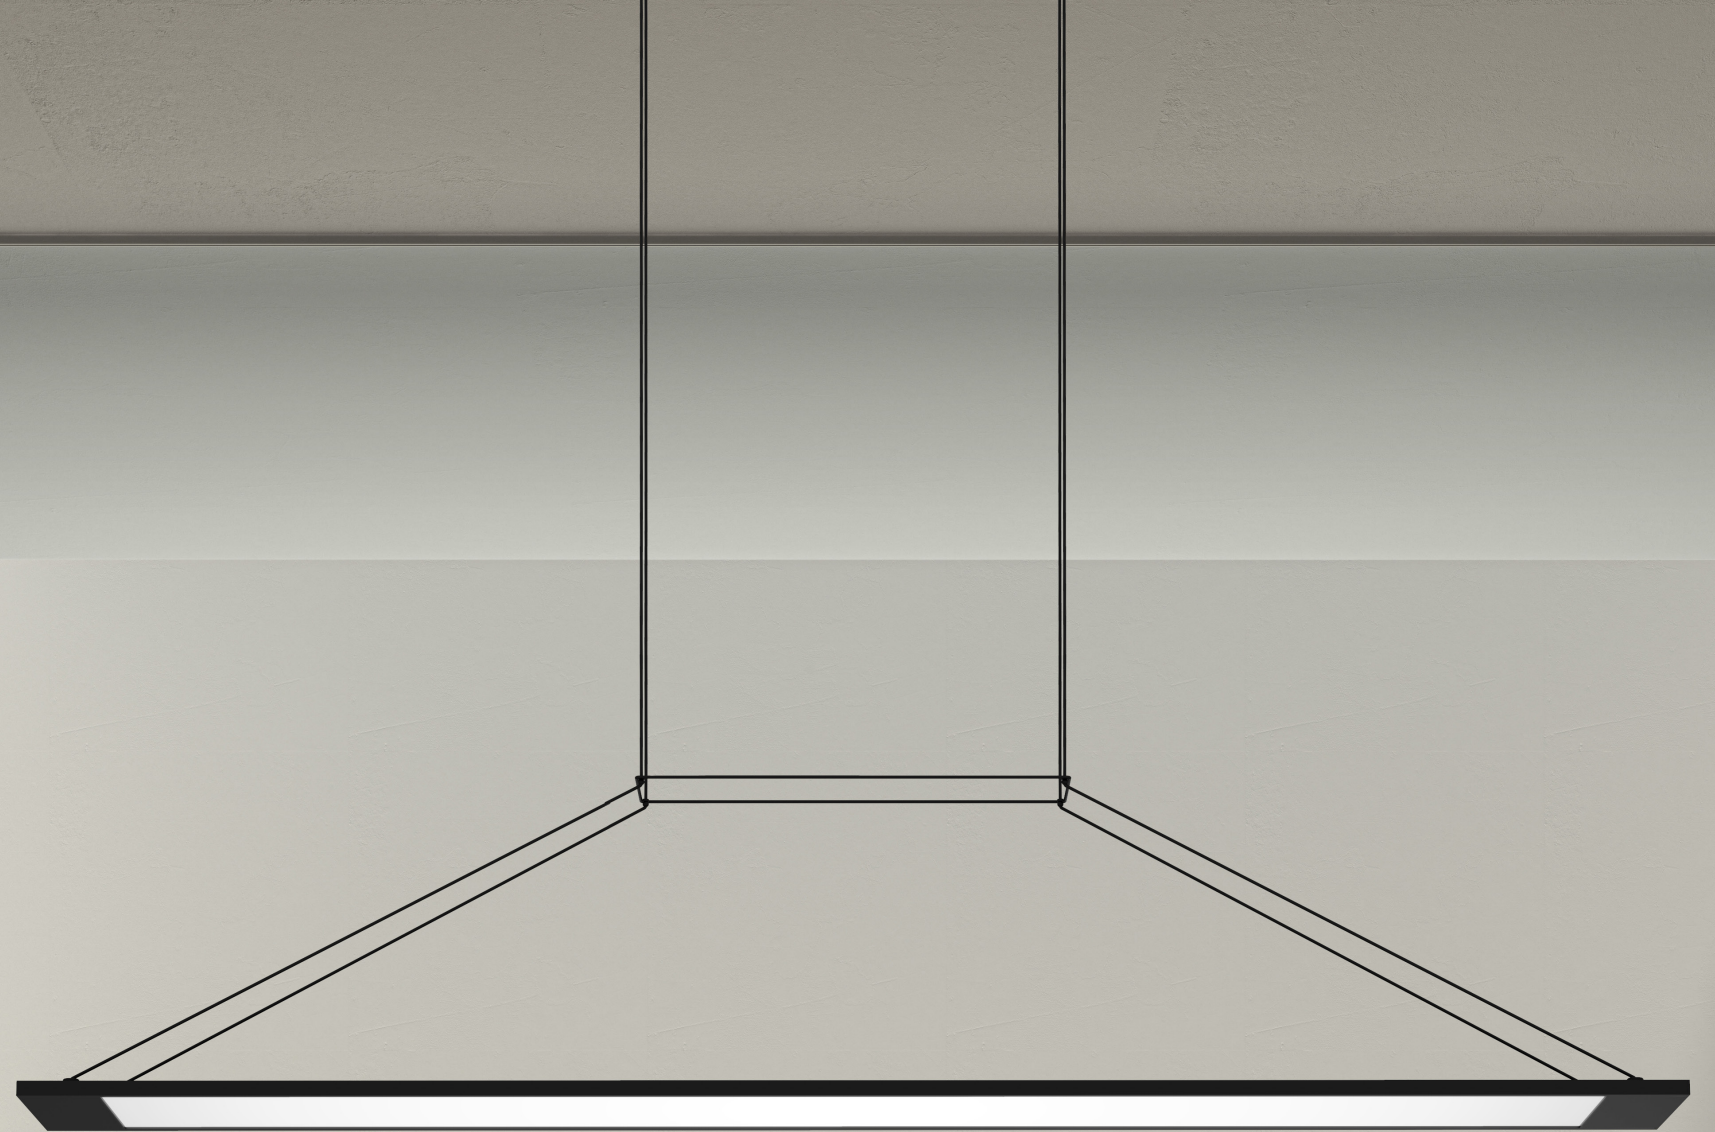

3224.25

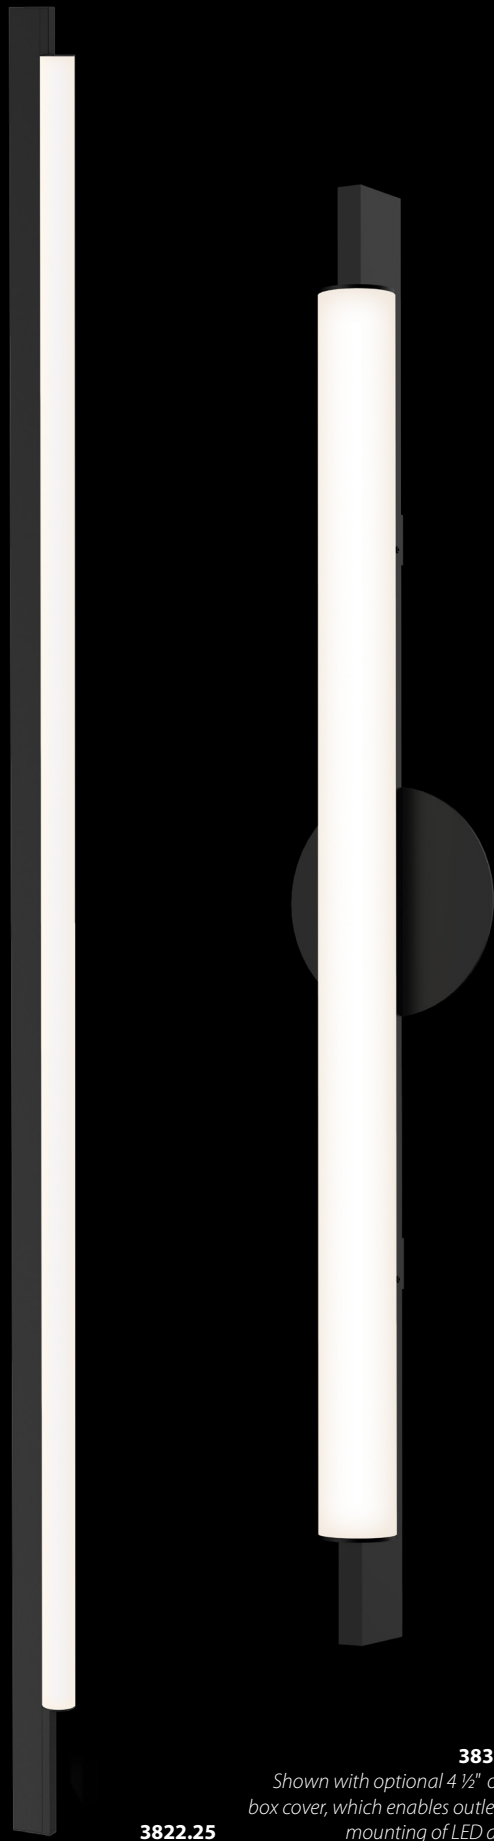


3822.25

3832.25

Shown with optional 4 1/2" outlet box cover, which enables outlet box mounting of LED driver.



3826.25

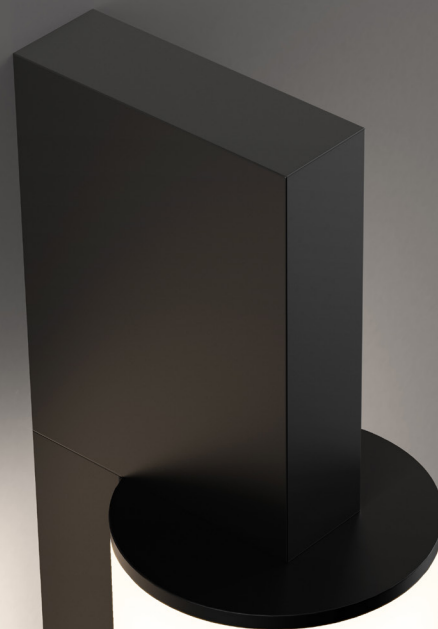

3820.25

keel™

A rectilinear keel intersects a luminous cylinder to create architectural linear compositions of dramatic length. Suspended, wall-mounted, or free-standing, these crisply intersecting forms bring multiple lighting applications to the task with architectural precision.





3826

Keel 44" LED Pendant

2" H x 44" W x 1 1/2" D
Shade: Optical Acrylic
1 1/2" H x 40" W x 1 1/2" D
Canopy: 1/2" H x 4 1/2" DIA
w/6' Adjustable Cord/Cable
Output: LED; 22W; 2,550 Lumens
(1,800 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 3826.03** Satin White
3826.16 Bright Satin Aluminum
3826.25 Satin Black

3826.25


keel™

3828

Keel 60" LED Pendant

2" H x 60" W x 1 1/2" D
Shade: Optical Acrylic
1 1/2" H x 56" W x 1 1/2" D
Canopy: 2" H x 5" DIA w/6' Adjustable Cord/Cable
Output: LED; 29W; 3,410 Lumens
(2,400 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard
(TRIAC) Incandescent (at 120VAC only), or 0-10V

- 3828.03** Satin White
3828.16 Bright Satin Aluminum
3828.25 Satin Black

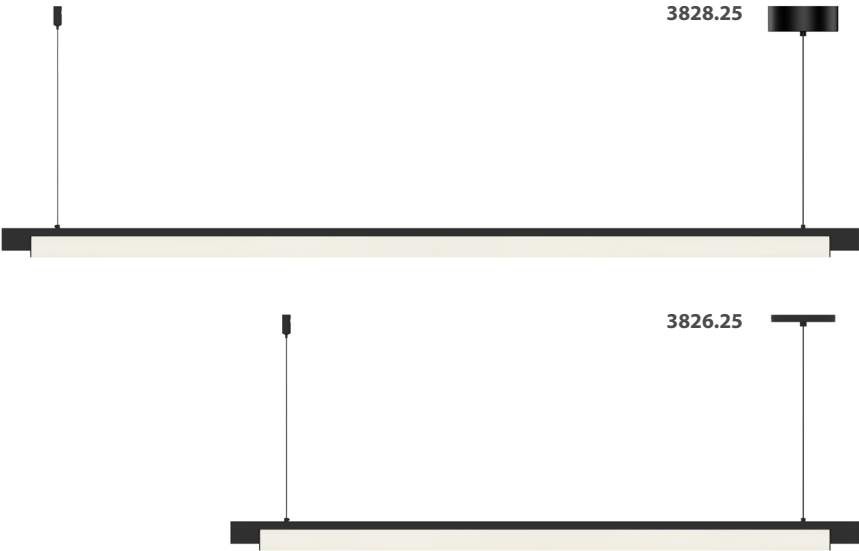

3820

Keel LED Floor Lamp

86 1/2" H x 8" W x 9" D
Shade: Optical Acrylic
74" H x 1 1/2" W x 1 1/2" D
Base: 2" H x 8" DIA w/8' Cord
Switch: 4-Step Touch Dimmer
Output: LED; 28W; 2,420 Lumens
(1,700 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-240VAC w/Power Supply on Plug
ADA

- 3820.03** Satin White
3820.16 Bright Satin Aluminum
3820.25 Satin Black

3820.25

keel™

3822

Keel LED Wall Lamp

82 ¼" h x 1 ½" w
Shade: Optical Acrylic
74" h x 1 ½" w x 1 ½" d
Extension: 3"
Wall Plate: 82 ¼" h x ¾" w
Switch: 4-Step Touch Dimmer
Pin-up w/8' Cord
Output: LED; 28W; 2,420 Lumens
(1,700 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-240VAC w/Power Supply on Plug

- ADA**
- 3822.03** Satin White
 - 3822.16** Bright Satin Aluminum
 - 3822.25** Satin Black

Shown configured for remote power supply.

3822.25



3833.25

3831

Keel 22" LED Bath Bar

1 ½" h x 22" w
Shade: Optical Acrylic
1 ½" h x 18" w x 1 ½" d
Extension: 2 ¼"
Output: LED; 11W; 1,150 Lumens
(800 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- ADA**
- 3831.03** Satin White
 - 3831.16** Bright Satin Aluminum
 - 3831.25** Satin Black

Optional 4 ½" outlet box cover available, which enables outlet box mounting of LED driver.

3832

Keel 28" LED Bath Bar

1 ½" h x 28" w
Shade: Optical Acrylic
1 ½" h x 24" w x 1 ½" d
Extension: 2 ¼"
Output: LED; 15W; 1,600 Lumens
(1,100 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- ADA**
- 3832.03** Satin White
 - 3832.16** Bright Satin Aluminum
 - 3832.25** Satin Black

Optional 4 ½" outlet box cover available, which enables outlet box mounting of LED driver.

3833

Keel 36" LED Bath Bar

1 ½" h x 36" w
Shade: Optical Acrylic
1 ½" h x 32" w x 1 ½" d
Extension: 2 ¼"
Output: LED; 17W; 2,050 Lumens
(1,450 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- ADA**
- 3833.03** Satin White
 - 3833.16** Bright Satin Aluminum
 - 3833.25** Satin Black

Optional 4 ½" outlet box cover available, which enables outlet box mounting of LED driver.

3834

Keel 44" LED Bath Bar

1 ½" h x 44" w
Shade: Optical Acrylic
1 ½" h x 40" w x 1 ½" d
Extension: 2 ¼"
Output: LED; 22W; 2,550 Lumens
(1,800 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- ADA**
- 3834.03** Satin White
 - 3834.16** Bright Satin Aluminum
 - 3834.25** Satin Black

Optional 4 ½" outlet box cover available, which enables outlet box mounting of LED driver.



purolinear 360™

A system of linear tubes, set within the geometry of surface-mounted cylinder brackets, rotate individually to direct the LED illumination in 360 degrees along their axis. Arranged in a linear pattern or along a single path, the possibilities for compositions are endless and unlimited in scalability. Set on a wall, in line behind a bed, the rotatable luminaires provide the variability of direct or indirect illumination. Arranged along a large wall in an extensive intersecting pattern, the composition forms a dramatic sculptural light-scape. In a bath, the rotatable light tubes of Purolinear 360 can be arranged to surround a mirror on all four sides. This system creates dramatically variable illumination across large planes or narrow lengths of surfaces. Its rotatable light can run along a narrow hallway or around the perimeter of a large ceiling. The perfect geometry of light as an architectural element of a modern space.

23QPCSR22R120PHA

purolinear 360™

23QxxL233R120PHA

Purolinear 360 36" Double Linear LED Wall Bar

1 ¼" h x 73 ½" w
Shade: Optical Acrylic
Extension: 2 ¾"
Wall Plate: 1 ½" dia
Output: 2pcs LED; 20W; 1,820 Lumens
(1,300 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV) and Standard
(TRIAC) Incandescent (at 120VAC only), or 0-10V

ADA

- 23QPCL233R120PHA Polished Chrome
- 23QSCL233R120PHA Satin Chrome
- 23QSKL233R120PHA Satin Black
- 23QSWL233R120PHA Satin White



purolinear 360TM

Purolinear 360 can transition between wall and ceiling mounting using corner connectors, as shown, providing an unbroken path of directable linear illumination throughout a space. Light can be directed in 360 degrees of rotation around its axis.

Custom configuration shown with Satin Black



23QPCL244B120PHA

purolinear 360™

23QxxL244B120PHA


Purolinear 360 48" Double Linear LED Wall Bar
 1 ¼" H x 97 ¼" W
 Shade: Optical Acrylic
 Extension: 2 ¾"
 Wall Plate: 4 ½" DIA x ½" D
 Output: 2pcs LED; 24W; 2,240 Lumens
 (1,600 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/LED Driver in Outlet Box
 Dimming: Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent

- 23QPCL244B120PHA** Polished Chrome
- 23QSCL244B120PHA** Satin Chrome
- 23QSKL244B120PHA** Satin Black
- 23QSWL244B120PHA** Satin White

23QxxSR24R120PHA

Purolinear 360 24"/48" Rectangle LED Wall Bar
 48 ¾" H x 24 ¾" W
 Shade: Optical Acrylic
 Extension: 2 ¾"
 Wall Plate: 2" DIA
 Output: 4pcs LED; 36W; 3,620 Lumens
 (2,590 Net Lumens); Warm White (3000K); 90 CRI
 Input: 100-277VAC w/Remote LED Driver
 Dimming: Electronic Low Voltage (ELV) and
 Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

- 23QPCSR24R120PHA** Polished Chrome
- 23QSCSR24R120PHA** Satin Chrome
- 23QSKSR24R120PHA** Satin Black
- 23QSWSR24R120PHA** Satin White

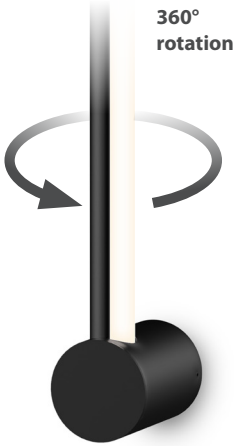

360° rotation




23QSKSR24R120PHA

purolinear 360™ system components


Purolinear 360 is a modular system composed of Luminaires in three lengths and Connectors in two sizes and five styles. Any of the Connectors can be used as a power feed, with up to 8' of Luminaire length in any direction from the power feed. Luminaires can also be electrically isolated from a Connector, allowing multiple circuits to be connected together to form a configuration of unlimited scale.

LED LUMINAIRES

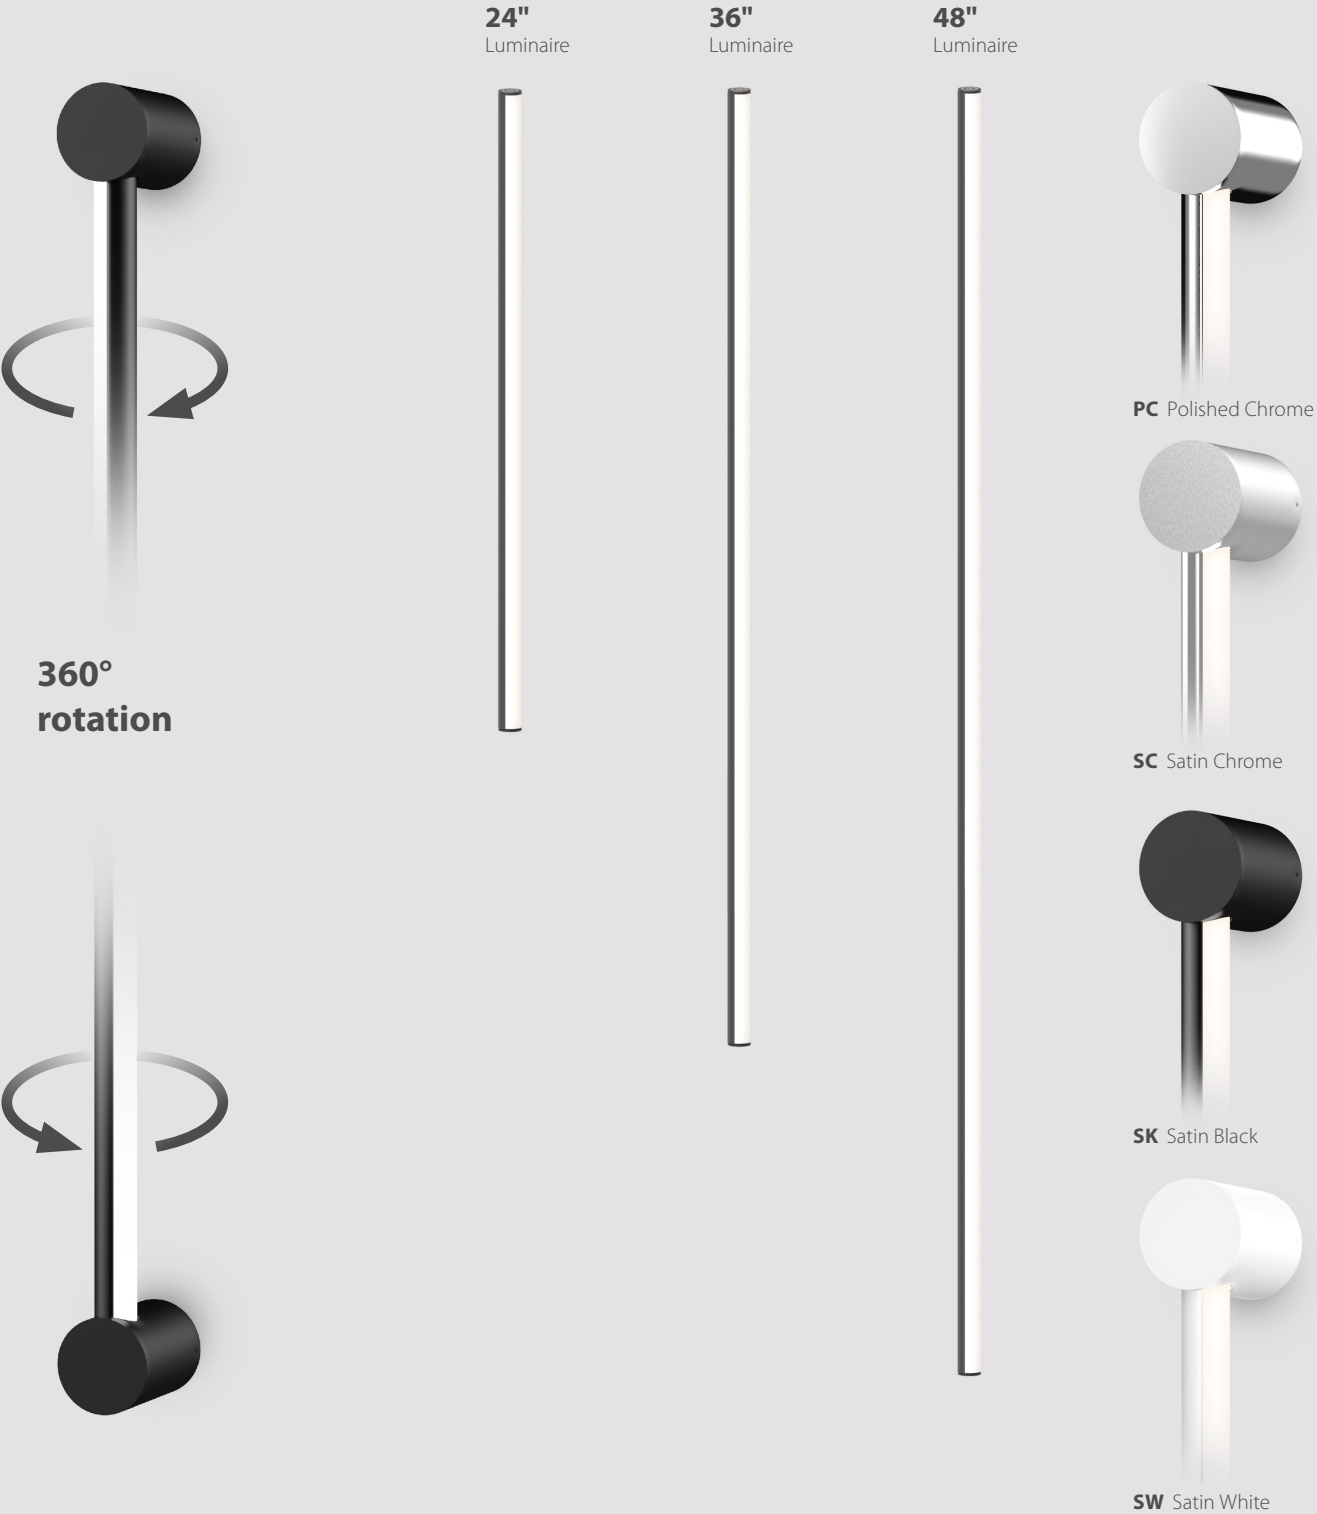


SMALL CONNECTORS

Small Connectors are 1" in diameter, and are available in End and Linear styles, for a minimal appearance in a linear configuration. Small Connectors can be used as a power feed with a remote-mounted LED driver, and are also available with a canopy for mounting over a 4" octagon box.

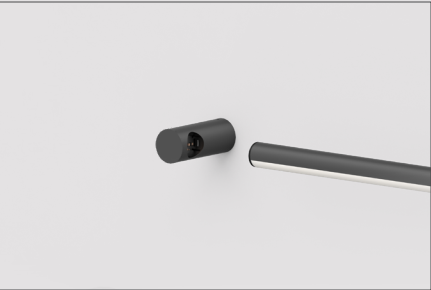


E1
Small End Connector
23CxxE101

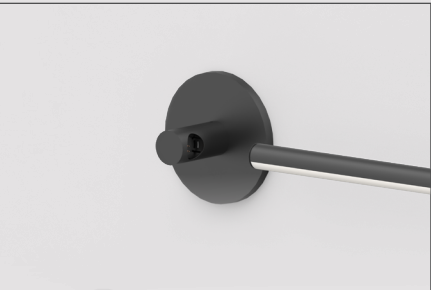

E1
Small End Connector
with Canopy
23CxxE111




L1
Small Linear Connector
23CxxL101

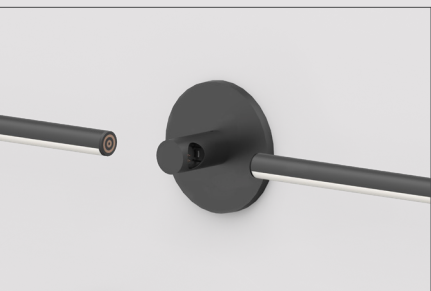


L1
Small Linear Connector
with Canopy
23CxxL111

LARGE CONNECTORS

Large Connectors are 2" in diameter, and are available in five styles – End, Linear, Corner, T, and X – and may be used to wrap around a mirror or build an expansive grid system. Large Connectors can be used as a power feed with a remote-mounted LED driver, and may be combined with any of the small connectors if desired.

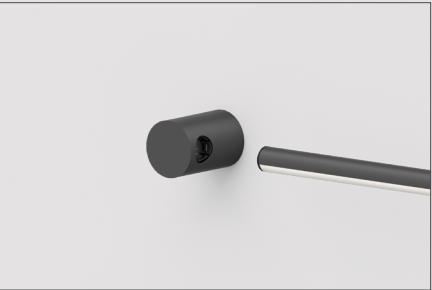


E2
Large End Connector
23CxxE201

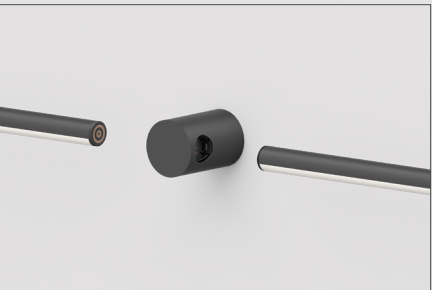

L2
Large Linear Connector
23CxxL201



C2
Large Corner Connector
23CxxC201

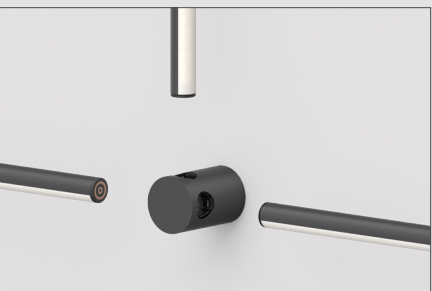

T2
Large T Connector
23CxxT201



X2
Large X Connector
23CxxX201

purolinear 360™
how to order

Specify your Purolinear 360 system by building your item numbers using the tables below, selecting from left to right the desired option from each column. Purolinear 360 can be ordered two ways: either as components by specifying your desired number of Luminaires, Connectors, and Drivers, or by using the Preconfigured Quick Spec table to customize one of the options shown on the opposite page.

SYSTEM ORDERING

Luminaire Ordering Table					
Family	Category	Finish	Length	CCT	CRI
23 Purolinear 360	L Luminaire	PC Polished Chrome	24 24"	30 3000K	90 Min. 90
		SC Satin Chrome	36 36"		
		SK Satin Black	48 48"		
		SW Satin White			

Example Luminaire Item Number:
2 3 L S K 2 4 3 0 9 0

Connector Ordering Table					
Family	Category	Finish	Style	Canopy	Electrical Type
23 Purolinear 360	C Connector	PC Polished Chrome	E1 Small End Connector	0 No	1 Live
		SC Satin Chrome	E2 Large End Connector	1 Yes ¹	
		SK Satin Black	L1 Small Linear Connector		
		SW Satin White	L2 Large Linear Connector		
			C2 Large Corner Connector		
			T2 Large T Connector		
			X2 Large X Connector		

Example Connector Item Number:
2 3 C S K E 1 0 1

Driver Ordering Table					
Family	Category	Driver Location	Total Luminaire Length ⁴	Driver Input Voltage	Driver Dimming
23 Purolinear 360	D Driver	B Outlet Box ²	08 Up to 8'	120 120V	PHA Phase (Triac/ELV)
		R Remote	12 Up to 12'	230 230V	010 0-10V
		S Switch ³	20 Up to 20'	277 277V	SWT Built-in switch ⁵
			32 Up to 32'		

Example Driver Item Number:
2 3 D B 0 3 1 2 0 P H A

PRECONFIGURED QUICK SPEC ORDERING

Family	Category	Finish	Style	Length A	Length B	Driver Location	Driver Input Voltage	Driver Dimming
23 Purolinear 360	Q Quick Spec	PC Polished Chrome	L1 Single Linear ⁶	2 2'	0 N/A	B Outlet Box ⁷	120 120V	PHA Phase (Triac/ELV)
		SC Satin Chrome	L2 Double Linear	3 3'	2 2'	R Remote	230 230V	010 0-10V
		SK Satin Black	N1 Single N	4 4'	3 3'	S Switch ³	277 277V	SWT Built-in switch ⁵
		SW Satin White	N2 Double N		4 4'			
			SR Square/Rectangle					

Example Quick Spec Item Number:
2 3 Q S K L 1 2 0 B 1 2 0 P H A

¹ Only available for E1 and L1 Connector Styles

² Driver can be installed in a standard 4" octagon box. Only available for Total Luminaire Length 08. Requires a connector with a canopy.

³ Requires use of our provided wall dimmer switch with built-in LED driver on a dedicated circuit; must specify Driver Input Voltage 120 and Driver Dimming SWT

⁴ For Total Luminaire Lengths greater than 32, split configuration into two or more circuits and specify a driver for each circuit. Refer to the assembly instructions for how to electrically isolate different sections of a configuration.

⁵ Must specify Driver Location S

⁶ Must specify Length B 0

⁷ Driver can be installed in a standard 4" octagon box. Only available for Style L1 and L2. Selecting Driver Location B for Style L2 gives a center-mounted canopy.

purolinear 360™
preconfigured quick spec options

L1 Single Linear
Configuration as shown:
23QSKL120B120PHA
Includes Small Connectors with a canopy

L2 Double Linear
Configuration as shown:
23QSKL222B120PHA
Includes Small Connectors with a center-mounted canopy.

N1 Single N
Configuration as shown:
23QSKN122R120PHA
Includes Large Connectors


N2 Double N
Configuration as shown:
23QSKN222R120PHA
Includes Large Connectors

SR Square/Rectangle
Configuration as shown:
23QSKSR22R120PHA
Includes Large Connectors

ELECTRICAL PATH GUIDELINES

Example: 4' x 8' Configuration

Luminaires can extend up to 8' in any direction from the power feed.

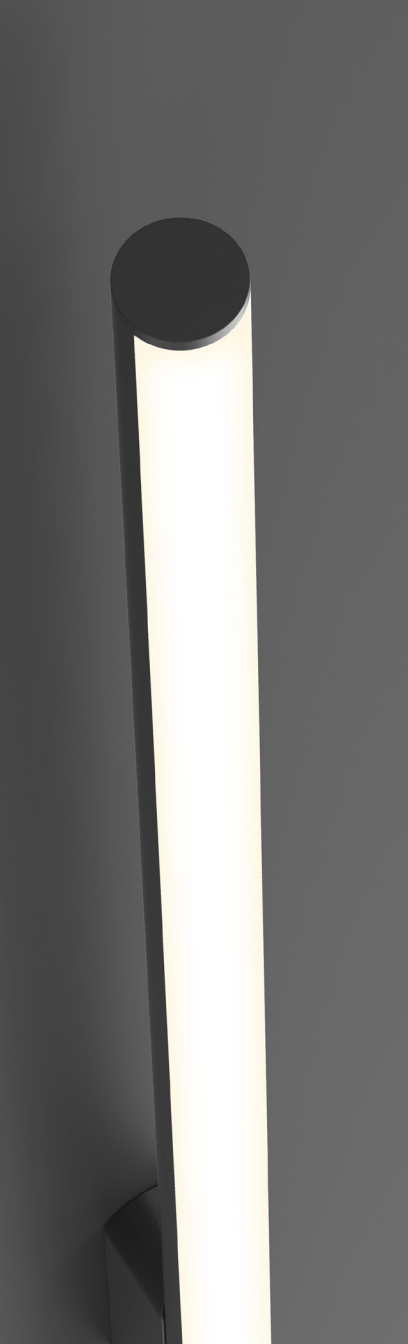

3771

Fino 18" LED Bath Bar

1" H x 18" W
Shade: Optical Acrylic
3/4" H x 17 3/4" W x 1/4" D
Extension: 1 1/2"
Wall Plate: 1/2" H x 3 1/4" W
Output: LED; 11W; 1,000 Lumens
(700 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3771.01 Polished Chrome
3771.03 Satin White
3771.23 Satin Chrome
3771.25 Satin Black

*Optional 4 1/2" wall plate kit
available, which enables outlet box
mounting of LED driver.*

3772

Fino 24" LED Bath Bar

1" H x 24" W
Shade: Optical Acrylic
3/4" H x 23 3/4" W x 1/4" D
Extension: 1 1/2"
Wall Plate: 1/2" H x 3 1/4" W
Output: LED; 13W; 1,400 Lumens
(1,000 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3772.01 Polished Chrome
3772.03 Satin White
3772.23 Satin Chrome
3772.25 Satin Black

*Optional 4 1/2" wall plate kit
available, which enables outlet box
mounting of LED driver.*

3773

Fino 32" LED Bath Bar

1" H x 32" W
Shade: Optical Acrylic
3/4" H x 31 3/4" W x 1/4" D
Extension: 1 1/2"
Wall Plate: 1/2" H x 3 1/4" W
Output: LED; 17W; 1,700 Lumens
(1,200 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3773.01 Polished Chrome
3773.03 Satin White
3773.23 Satin Chrome
3773.25 Satin Black

*Optional 4 1/2" wall plate kit
available, which enables outlet box
mounting of LED driver.*

3774

Fino 40" LED Bath Bar

1" H x 40" W
Shade: Optical Acrylic
3/4" H x 39 3/4" W x 1/4" D
Extension: 1 1/2"
Wall Plate: 1/2" H x 3 1/4" W
Output: LED; 22W; 2,100 Lumens
(1,500 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3774.01 Polished Chrome
3774.03 Satin White
3774.23 Satin Chrome
3774.25 Satin Black

*Optional 4 1/2" wall plate kit
available, which enables outlet box
mounting of LED driver.*

fino™

Ultra thin and minimally scaled,
these slender bars of powerful
light are mounted in a fixed position
on a wall or ceiling. The softly shaped
mounting brackets have radiused
ends on their linear section and can
be mounted directly to a wall with
a remotely placed LED driver. Optionally
available is a 4 1/2" round wall plate for
mounting directly to an electrical box.
Available in four finishes.



3774.25
Shown with optional 4 1/2" wall plate kit.



3831 Keel 22" LED Bath Bar

1 1/2" H x 22" W
Shade: Optical Acrylic
1 1/2" H x 18" W x 1 1/2" D
Extension: 2 1/4"
Output: LED; 11W; 1,150 Lumens
(800 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

- 3831.03** Satin White
3831.16 Bright Satin Aluminum
3831.25 Satin Black

*Optional 4 1/2" outlet box cover
available, which enables outlet box
mounting of LED driver.*



3832 Keel 28" LED Bath Bar

1 1/2" H x 28" W
Shade: Optical Acrylic
1 1/2" H x 24" W x 1 1/2" D
Extension: 2 1/4"
Output: LED; 15W; 1,600 Lumens
(1,100 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

- 3832.03** Satin White
3832.16 Bright Satin Aluminum
3832.25 Satin Black

*Optional 4 1/2" outlet box cover
available, which enables outlet box
mounting of LED driver.*

3833 Keel 36" LED Bath Bar

1 1/2" H x 36" W
Shade: Optical Acrylic
1 1/2" H x 32" W x 1 1/2" D
Extension: 2 1/4"
Output: LED; 17W; 2,050 Lumens
(1,450 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

- 3833.03** Satin White
3833.16 Bright Satin Aluminum
3833.25 Satin Black

*Optional 4 1/2" outlet box cover
available, which enables outlet box
mounting of LED driver.*

3834 Keel 44" LED Bath Bar

1 1/2" H x 44" W
Shade: Optical Acrylic
1 1/2" H x 40" W x 1 1/2" D
Extension: 2 1/4"
Output: LED; 22W; 2,550 Lumens
(1,800 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/Remote LED Driver
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

- 3834.03** Satin White
3834.16 Bright Satin Aluminum
3834.25 Satin Black



*Optional 4 1/2" outlet box cover
available, which enables outlet box
mounting of LED driver.*



keel™

Dramatically functional and architecturally
precise, this acrylic cylinder crisply intersects
a rectangular keel to form a classically minimalist
modern approach to functionality.

3833.25

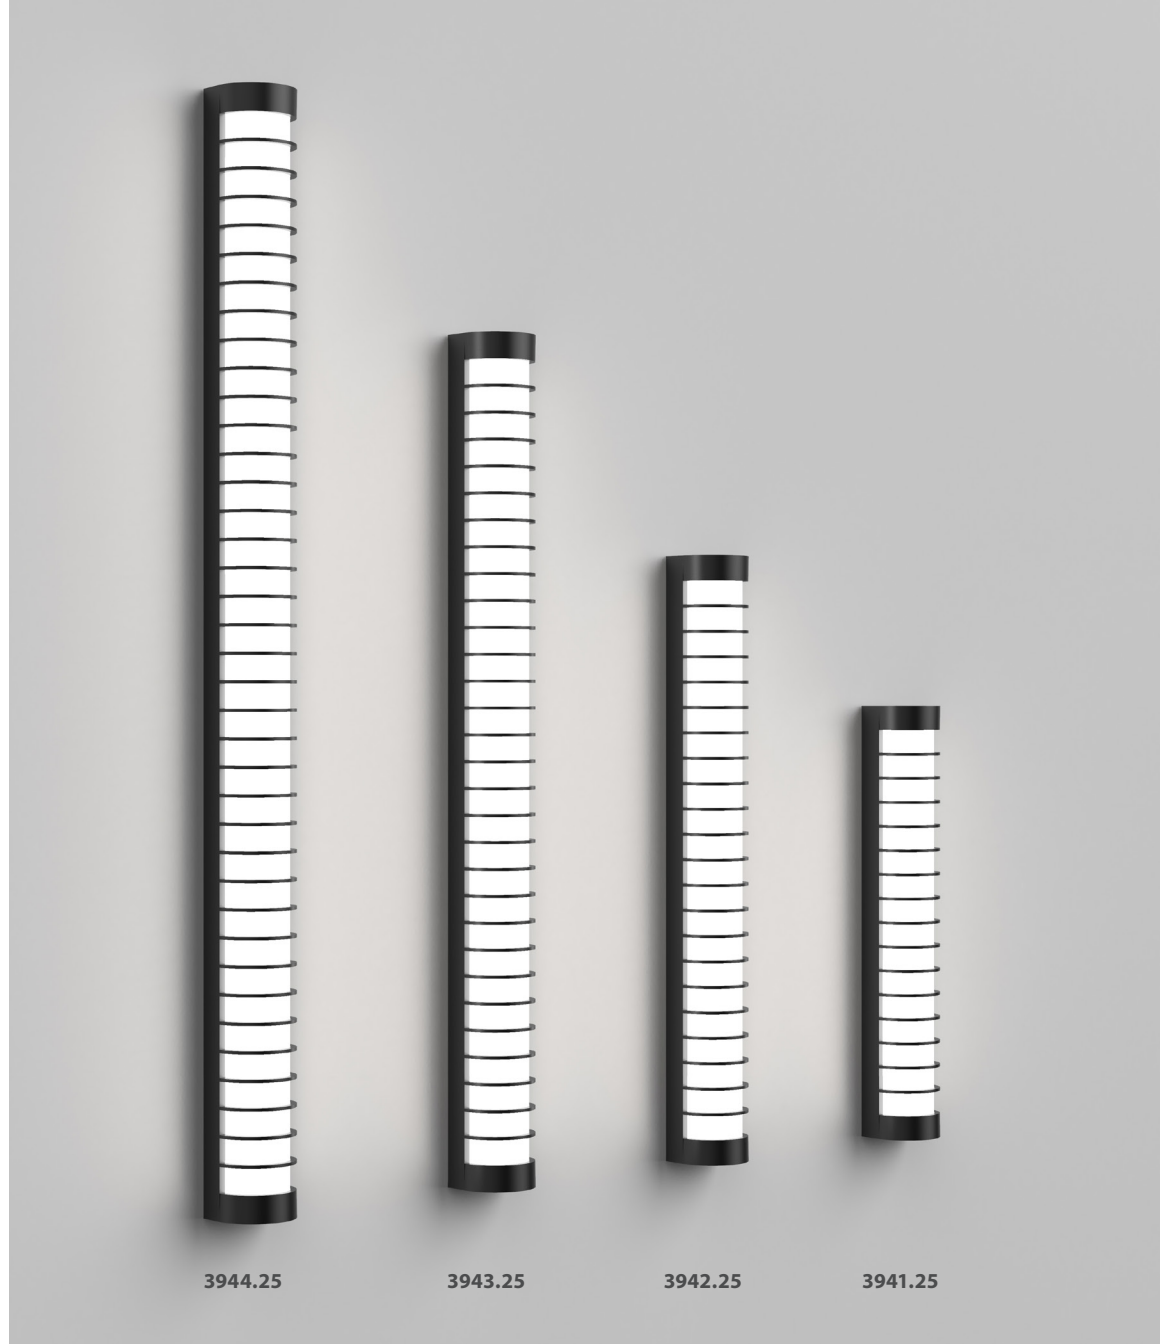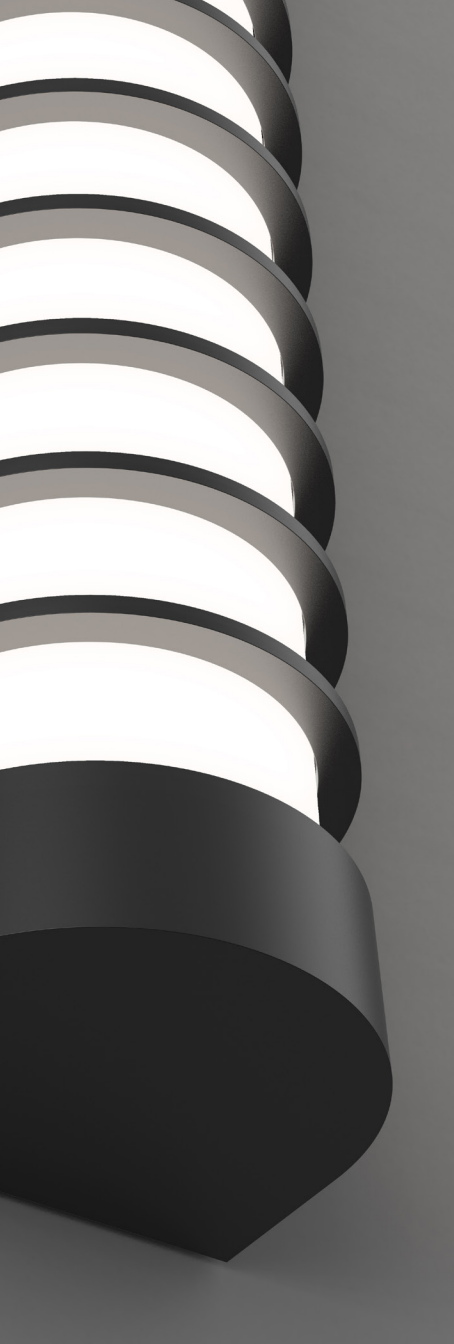

3944

Gessato 40" LED Bath Bar

3" H x 40" W
Shade: Optical Acrylic
2 3/4" H x 38" W x 1 1/2" D
Extension: 2 1/2"
Wall Plate: 3" H x 40" W
Output: LED; 21W; 2,000 Lumens
(1,200 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V
ADA

3944.25 Satin Black

3943

Gessato 32" LED Bath Bar

3" H x 32" W
Shade: Optical Acrylic
2 3/4" H x 30" W x 1 1/2" D
Extension: 2 1/2"
Wall Plate: 3" H x 32" W
Output: LED; 16W; 1,500 Lumens
(900 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V
ADA

3943.25 Satin Black

3942

Gessato 24" LED Bath Bar

3" H x 24" W
Shade: Optical Acrylic
2 3/4" H x 22" W x 1 1/2" D
Extension: 2 1/2"
Wall Plate: 3" H x 24" W
Output: LED; 13W; 1,200 Lumens
(720 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V
ADA

3942.25 Satin Black

3941

Gessato 18" LED Bath Bar


3" H x 18" W
Shade: Optical Acrylic
2 3/4" H x 16" W x 1 1/2" D
Extension: 2 1/2"
Wall Plate: 3" H x 18" W
Output: LED; 9W; 800 Lumens
(480 Net Lumens); Warm White
(3000K); 90 CRI
Input: 120VAC w/LED Driver
in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3941.25 Satin Black


gessato™

The rhythmically aligned circular fins
of this architecturally precise linear
composition delineate its solid,
functional geometry. Mounted vertically
or horizontally on a wall or ceiling, the
crisp pattern of fins defines a disciplined
rhythm of length and scale.


3943.25

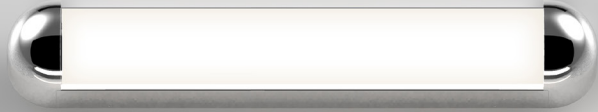


3951.01

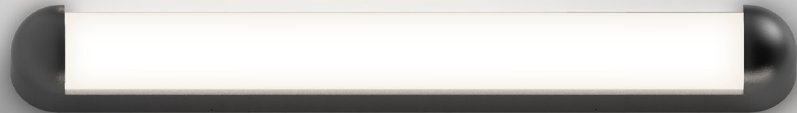

3952.25



3953.01

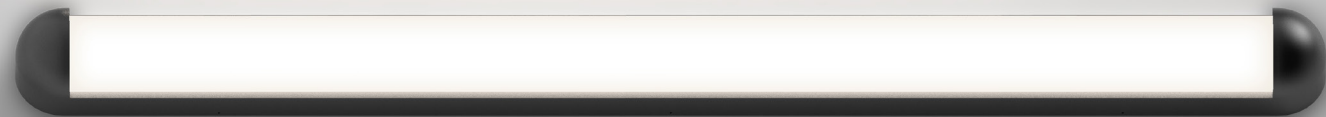

3954.25



3953.25

3951

Radio 18" LED Bath Bar

3" h x 18" w
Shade: Optical Acrylic
14 3/4" h x 2 3/4" w x 1 1/2" d
Extension: 2 1/2"
Wall Plate: 3" h x 18" w
Output: LED; 8W; 800 Lumens
(550 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver
in Outlet Box

Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA

3951.01 Polished Chrome
3951.25 Satin Black

3952

Radio 24" LED Bath Bar

3" h x 24" w
Shade: Optical Acrylic
20 3/4" h x 2 3/4" w x 1 1/2" d
Extension: 2 1/2"
Wall Plate: 3" h x 24" w
Output: LED; 12W; 1,200 Lumens
(800 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box

Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

ADA

3952.01 Polished Chrome
3952.25 Satin Black

3953

Radio 32" LED Bath Bar

3" h x 32" w
Shade: Optical Acrylic
28 3/4" h x 2 3/4" w x 1 1/2" d
Extension: 2 1/2"
Wall Plate: 3" h x 32" w
Output: LED; 15W; 1,500 Lumens
(1,050 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box

Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

ADA

3953.01 Polished Chrome
3953.25 Satin Black

3954

Radio 40" LED Bath Bar

3" h x 40" w
Shade: Optical Acrylic
36 3/4" h x 2 3/4" w x 1 1/2" d
Extension: 2 1/2"
Wall Plate: 3" h x 40" w
Output: LED; 20W; 2,000 Lumens
(1,500 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver
in Outlet Box

Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

ADA

3954.01 Polished Chrome
3954.25 Satin Black



radio™

Radio's clean lines and soft geometry bring a mid-century feel to a technologically modern bath bar. The gracefully rounded form and smooth, seamless diffuser offer illumination and a robust presence for the sophisticated bath. Radio's half-round profile mounts flush to the surface and can be fit to the edge of a mirror or wall.



3851

Plaza 18" LED Bath Bar

2 ¼" H x 20" W
Shade: White Etched Glass
2" H x 17 ½" W x 1 ¼" D
Extension: 3 ½"
Wall Plate: 3" H x 6" W
Output: LED; 13W; 1,200 Lumens
(720 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

ADA

3851.01 Polished Chrome

3851.23 Satin Chrome

Position of the wall plate is **fixed off-center**.

3852

Plaza 24" LED Bath Bar

2 ¼" H x 25 ¼" W
Shade: White Etched Glass
2" H x 22 ¾" W x 1 ¼" D
Extension: 3 ½"
Wall Plate: 3" H x 6" W
Output: LED; 15W; 1,560 Lumens
(940 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA

3852.01 Polished Chrome

3852.23 Satin Chrome

Position of the wall plate is **adjustable**.



plaza™

Plaza brings a modern presence that echoes the flowing forms of luxurious Deco architecture of the 1940s and 50s. Mounted in a modern bath or other interior room, Plaza delivers powerful illumination and stylish presence to a sophisticated space.

3853

Plaza 32" LED Bath Bar

2 ¼" H x 33 ½" W
Shade: White Etched Glass
2" H x 31" W x 1 ¼" D
Extension: 3 ½"
Wall Plate: 3" H x 6" W
Output: LED; 19W; 2,280 Lumens
(1,370 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V


ADA

3853.01 Polished Chrome

3853.23 Satin Chrome

Position of the wall plate is **fixed in center**.

3853.23

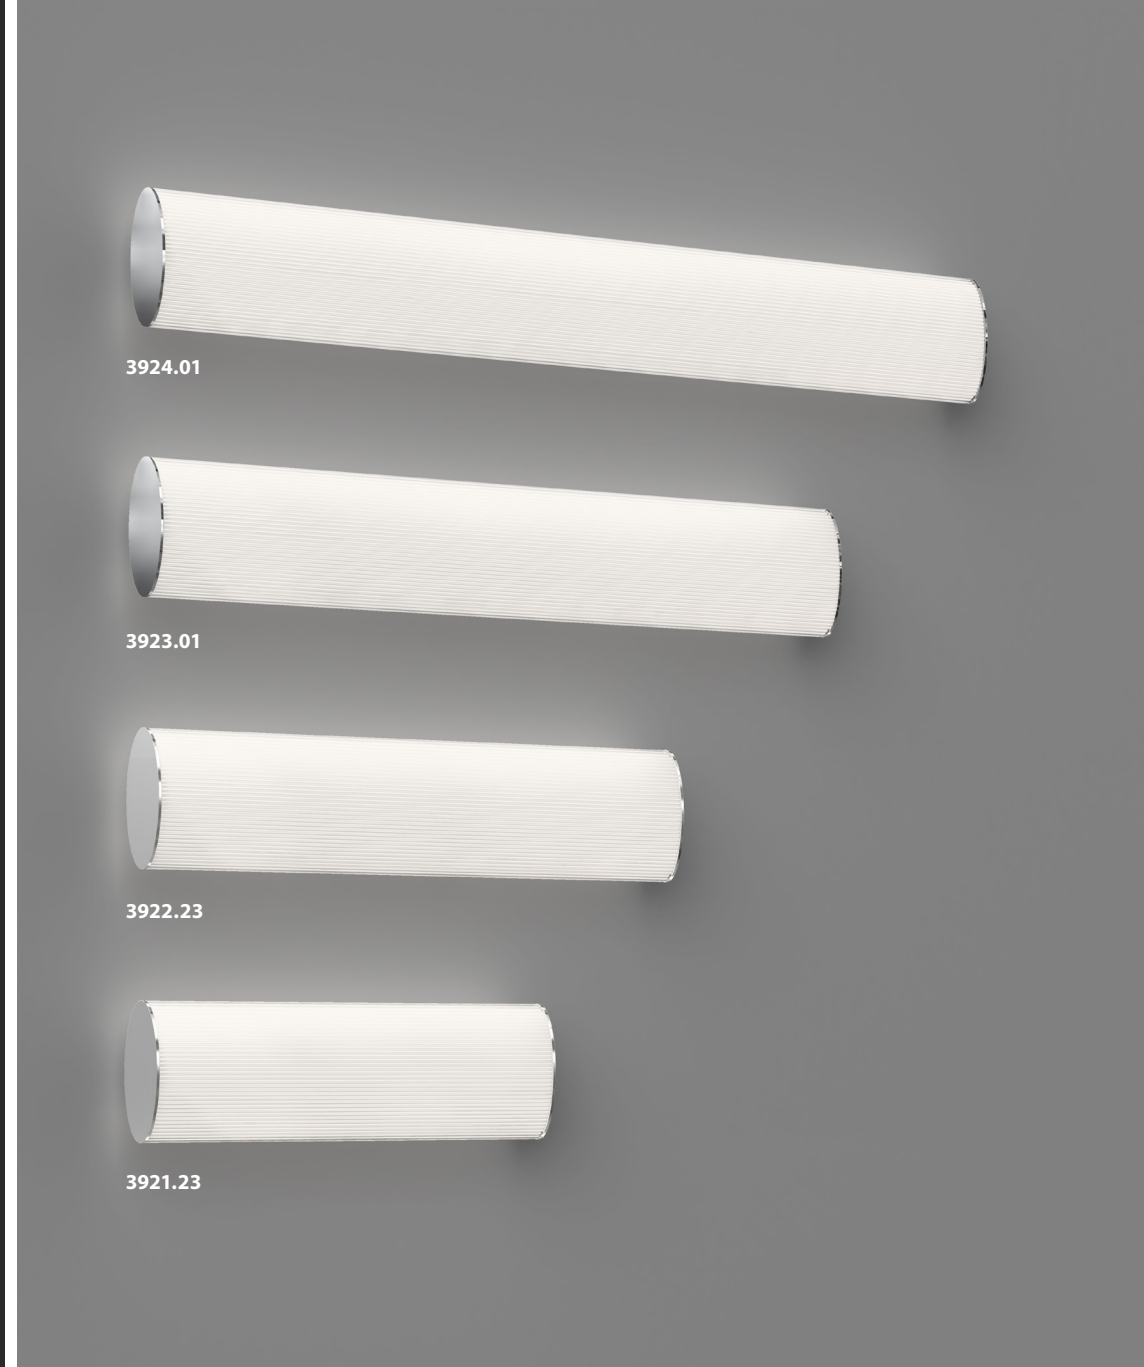

3921

Tuo 18" LED Bath Bar

5 1/4" H x 18" W
Shade: Optical Acrylic w/Clear Ribs
5 1/4" H x 17 3/4" W x 2" D
Extension: 3 1/4"
Wall Plate: 4" H x 8" W
Output: LED; 15W; 1,800 Lumens
(1,130 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver
in Fixture
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3921.01 Polished Chrome
3921.23 Satin Chrome

3922

Tuo 24" LED Bath Bar

5 1/4" H x 24" W
Shade: Optical Acrylic w/Clear Ribs
5 1/4" H x 23 3/4" W x 2" D
Extension: 3 1/4"
Wall Plate: 4" H x 8" W
Output: LED; 20W; 2,400 Lumens
(1,630 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver
in Fixture
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3922.01 Polished Chrome
3922.23 Satin Chrome

3923

Tuo 32" LED Bath Bar

5 1/4" H x 32" W
Shade: Optical Acrylic w/Clear Ribs
5 1/4" H x 31 3/4" W x 2" D
Extension: 3 1/4"
Wall Plate: 4" H x 8" W
Output: LED; 27W; 3,250 Lumens
(2,240 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver
in Fixture
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3923.01 Polished Chrome
3923.23 Satin Chrome

3924

Tuo 40" LED Bath Bar

5 1/4" H x 40" W
Shade: Optical Acrylic w/Clear Ribs
5 1/4" H x 39 3/4" W x 2" D
Extension: 3 1/4"
Wall Plate: 4" H x 8" W
Output: LED; 33W; 4,000 Lumens
(2,890 Net Lumens);
Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver
in Fixture
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

3924.01 Polished Chrome
3924.23 Satin Chrome

tuo™

Sophisticated elegant simplicity.

A beautifully scaled, sensuous elliptical form flows fluidly from its sculptured mounting, emitting its brightness through the clear ribs of a white oval acrylic shade.





2549.01

2546

Vanity Extra Wide 12" LED Bath Bar

4 ½" H x 12 ½" W
Shade: Optical Acrylic: 4 ½" H x 12 ½" W x ¾" D
Extension: 1 ¾"
Wall Plate: 4 ½" H x 12 ½" W
Output: LED; 9W; 770 Lumens (540 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA
2546.01 Polished Chrome

2547

Vanity Extra Wide 18" LED Bath Bar

4 ½" H x 18 ½" W
Shade: Optical Acrylic: 4 ½" H x 18 ½" W x ¾" D
Extension: 1 ¾"
Wall Plate: 4 ½" H x 18 ½" W
Output: LED; 13W; 1,160 Lumens (800 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA
2547.01 Polished Chrome

2548

Vanity Extra Wide 24" LED Bath Bar

4 ½" H x 24 ½" W
Shade: Optical Acrylic: 4 ½" H x 24 ½" W x ¾" D
Extension: 1 ¾"
Wall Plate: 4 ½" H x 24 ½" W
Output: LED; 17W; 1,550 Lumens (1,100 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA
2548.01 Polished Chrome

2549

Vanity Extra Wide 36" LED Bath Bar

4 ½" H x 36 ½" W
Shade: Optical Acrylic: 4 ½" H x 36 ½" W x ¾" D
Extension: 1 ¾"
Wall Plate: 4 ½" H x 36 ½" W
Output: LED; 21W; 1,930 Lumens (1,350 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

ADA
2549.01 Polished Chrome

2551

Vanity Extra Wide 48" LED Bath Bar


4 ½" H x 48 ½" W
Shade: Optical Acrylic: 4 ½" H x 48 ½" W x ¾" D
Extension: 1 ¾"
Wall Plate: 4 ½" H x 48 ½" W
Output: LED; 29W; 2,700 Lumens (1,900 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

ADA
2551.01 Polished Chrome



2551.01

Side Front

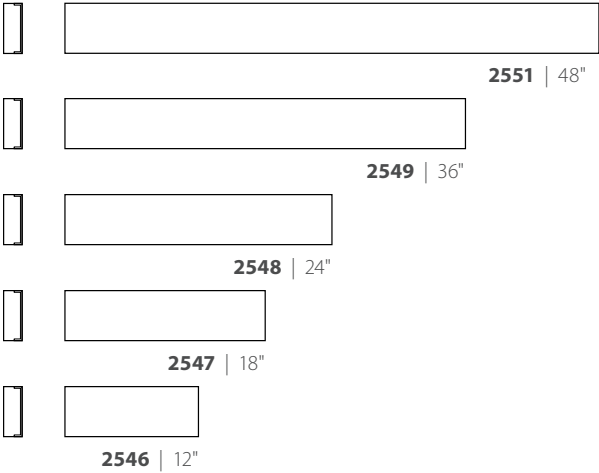

vanity™ extra wide

Vanity Extra Wide is a clean, unified approach that provides linear lighting to a vanity wall or ceiling installation, and provides a great solution to an often unresolved problem: long enough to extend the length or width of a bath or vanity mirror and broad enough to cover the electrical box cleanly, without an additional canopy or bracket. Vanity Extra Wide mounts directly to the surface and can be flushed up to the edge of a mirror or wall.



3702.25



3703.25



3702.18



3701.03

vuoto™

Light radiates from the perimeter and reflects off the surface of a circular void, symmetrically cut within the square volume of this bold solid geometry.

3701

Vuoto 10" LED Sconce

10" h x 10" w
Shade: Aluminum
Extension: 2 1/2"
Wall Plate: 9" h x 9" w
Output: LED; 13W; 1,500 Lumens
(650 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent

ADA

3701.03 Satin White
3701.18 Dove Gray
3701.25 Satin Black

3702

Vuoto 15" LED Sconce

15" h x 15" w
Shade: Aluminum
Extension: 2 1/2"
Wall Plate: 14" h x 14" w
Output: LED; 19W; 2,200 Lumens
(1,150 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3702.03 Satin White
3702.18 Dove Gray
3702.25 Satin Black

3703

Vuoto 20" LED Sconce

20" h x 20" w
Shade: Aluminum
Extension: 2 1/2"
Wall Plate: 19" h x 19" w
Output: LED; 27W; 3,000 Lumens
(1,750 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Fixture
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

ADA

3703.03 Satin White
3703.18 Dove Gray
3703.25 Satin Black

3703.25



3740.03

zoom™

In a fluid transition from square to round, Zoom sculpturally resolves the plane of the ceiling surface with the round aperture of a luminous source. Used singularly or in multiples, Zoom can be arranged in linear, square, or offset arrangements across a space.



3740.18

3740

Zoom LED Surface Mount

2" H x 6" W x 6" D

Shade: Thermoplastic w/2" DIA Optical Acrylic Diffuser

Canopy: 6" w x 6" D

Output: LED; 8W; 950 Lumens (500 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

3740.03 Satin White

3740.18 Dove Gray

3740.25 Satin Black



3735.03

ilios™

Set within a crisp round drum, the soft curvature of the interior surface reflects the luminance of a shallow dome diffuser. The result is a glow of unified radiance from within the volume, which delivers brightness with a soft ambiance within a space.

3736

Ilios 18" LED Surface Mount

5" H X 18" DIA
Shade: Frosted Acrylic
2" H X 9 1/2" DIA
Canopy: 18" DIA
Output: LED; 22W; 2,350 Lumens
(1,880 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Fixture
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

3736.03 Satin White

3736.18 Dove Gray

3734

Ilios 10" LED Surface Mount

4" H X 10" DIA
Shade: Frosted Acrylic
1" H X 5 1/4" DIA
Canopy: 10" DIA
Output: LED; 11W; 1,200 Lumens
(960 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Fixture
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

3734.03 Satin White

3734.18 Dove Gray

3735

Ilios 14" LED Surface Mount

4 1/2" H X 14" DIA
Shade: Frosted Acrylic
1 1/2" H X 7" DIA
Canopy: 14" DIA
Output: LED; 19W; 2,150 Lumens
(1,720 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Fixture
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
(at 120VAC only), or 0-10V

3735.03 Satin White

3735.18 Dove Gray

3733

Ilios 6" LED Surface Mount

4" H X 6" DIA
Shade: Frosted Acrylic
1" H X 3 1/4" DIA
Canopy: 6" DIA
Output: LED; 9W; 950 Lumens
(760 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Fixture
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent

3733.03 Satin White

3733.18 Dove Gray



3736.18



3735.03



3734.18



3733.03




2737.98




offset™ + additions

Two plates held in tandem, their unified geometry combines ambient illumination with a powerful downlight. Now available in rectangular and racetrack form factors in multiple lengths.


offset™ + additions

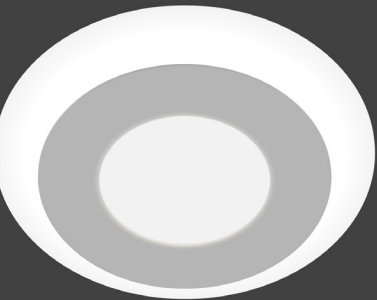


2729
Offset Round LED Surface Mount
2 1/2" H x 15 3/4" DIA
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 10" DIA
Output: LED; 30W; 2,700 Lumens (1,900 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2729.98 Textured White

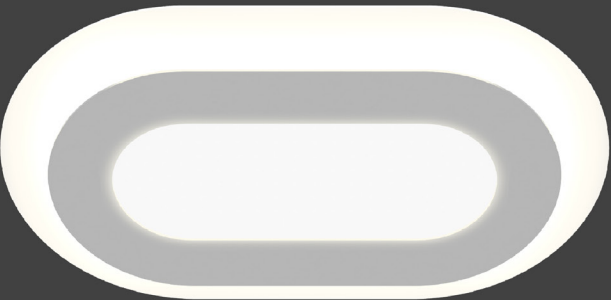

2735
Offset 24" Racetrack LED Surface Mount
2 3/4" H x 24" W x 15" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 19" W x 10" D
Output: LED; 43W; 4,500 Lumens (2,750 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2735.98 Textured White

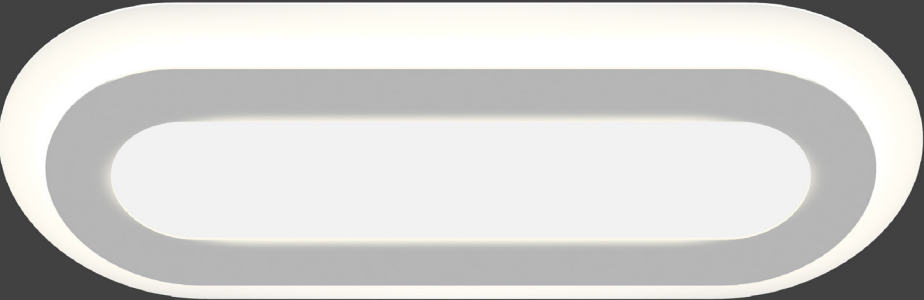

2737
Offset 36" Racetrack LED Surface Mount
2 3/4" H x 36" W x 15" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 31" W x 10" D
Output: LED; 54W; 5,850 Lumens (3,700 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2737.98 Textured White

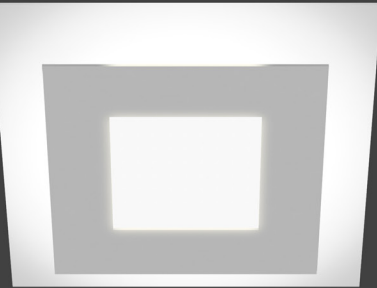

2727
Offset Square LED Surface Mount
2 1/2" H x 15" W x 15" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 10" SQ
Output: LED; 22W; 2,100 Lumens (1,500 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2727.98 Textured White



2731
Offset 24" Rectangle LED Surface Mount
2 3/4" H x 24" W x 15" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 17" W x 10" D
Output: LED; 43W; 4,140 Lumens (2,550 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2731.98 Textured White



2733
Offset 36" Rectangle LED Surface Mount
2 3/4" H x 36" W x 15" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 31" W x 10" D
Output: LED; 55W; 5,840 Lumens (3,500 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC)
Incandescent (at 120VAC only), or 0-10V
2733.98 Textured White

marue™ round


Simplicity flows from the rhythm of rings of diffused light along its height. These surface-mounted fixtures have a crisp refined presence with a modern edge.



7421.98



7420.72

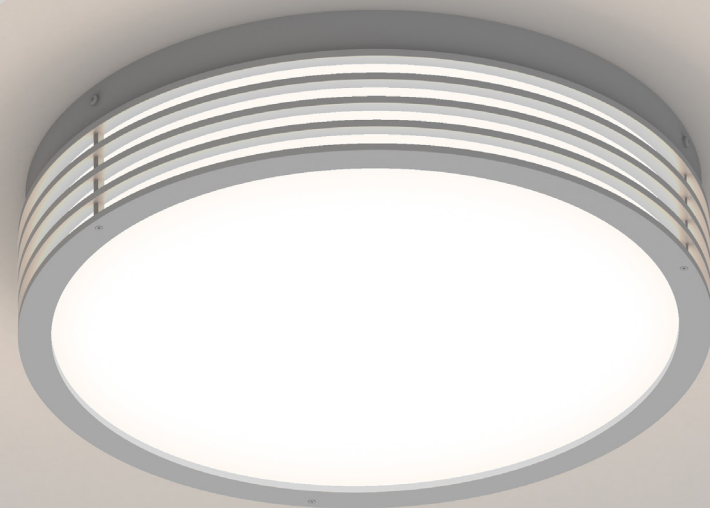

7422.74

7420

Marue 7" Round LED Surface Mount

3 1/8" H x 7 3/4" DIA
Shade: Optical Acrylic
Canopy: 7 1/4" DIA
Output: LED; 19W; 1,900 Lumens (1,330 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

7420.72 Textured Bronze
7420.74 Textured Gray
7420.98 Textured White

7421

Marue 10" Round LED Surface Mount

3 1/2" H x 10 3/4" DIA
Shade: Optical Acrylic
Canopy: 10 1/4" DIA
Output: LED; 30W; 3,000 Lumens (2,100 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V


7421.72 Textured Bronze
7421.74 Textured Gray
7421.98 Textured White

7422

Marue 14" Round LED Surface Mount

3 1/2" H x 14 3/4" DIA
Shade: Optical Acrylic
Canopy: 14 1/4" DIA
Output: LED; 50W; 5,100 Lumens (3,600 Net Lumens); Warm White (3000K); 90 CRI
Input: 100-277VAC w/LED Driver in Canopy
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

7422.72 Textured Bronze
7422.74 Textured Gray
7422.98 Textured White

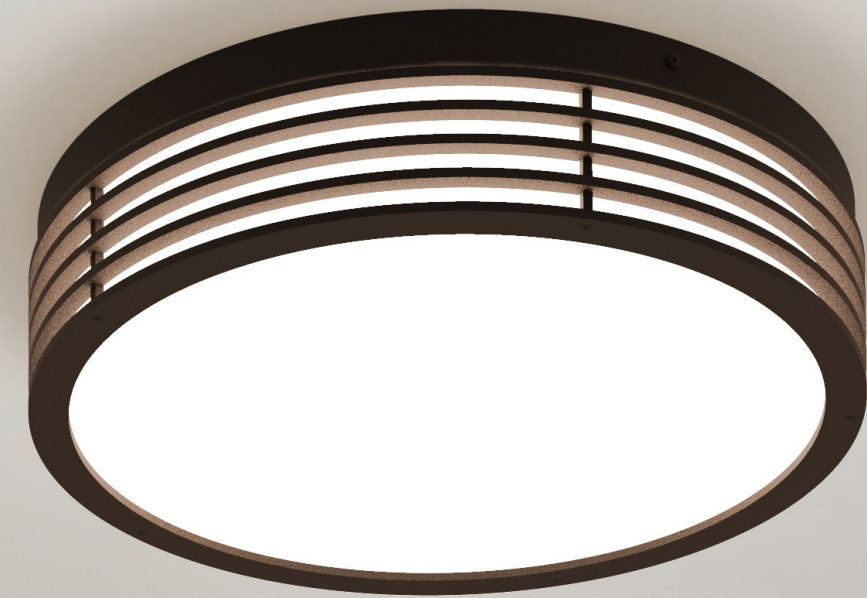


7422.72



7427.72

marue™ square

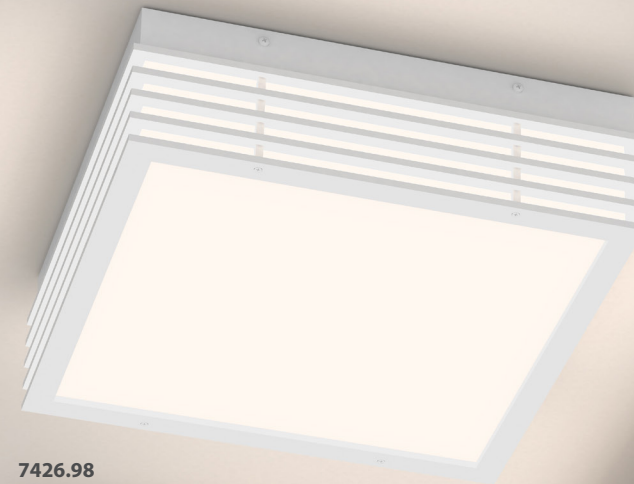

7426.98



7425.74



7427.74

7425

Marue 7" Square LED Surface Mount

3 1/2" H x 7 3/4" W x 7 3/4" D

Shade: Optical Acrylic

Canopy: 7 1/4" sq

Output: LED; 19W; 1,900 Lumens

(1,330 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

7425.72 Textured Bronze

7425.74 Textured Gray

7425.98 Textured White

7426

Marue 10" Square LED Surface Mount

3 1/2" H x 10 3/4" W x 10 3/4" D

Shade: Optical Acrylic

Canopy: 10 1/4" sq

Output: LED; 30W; 3,000 Lumens

(2,100 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

7426.72 Textured Bronze

7426.74 Textured Gray

7426.98 Textured White

7427

Marue 14" Square LED Surface Mount

3 1/2" H x 14 3/4" W x 14 3/4" D

Shade: Optical Acrylic

Canopy: 14 1/4" sq

Output: LED; 50W; 5,100 Lumens

(3,600 Net Lumens); Warm White (3000K); 90 CRI

Input: 100-277VAC w/LED Driver in Canopy

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V


7427.72 Textured Bronze

7427.74 Textured Gray

7427.98 Textured White

inside-out®

Beautifully executed forms equally at home inside or out. The consistency of the point of view of an object on or within a space reinforces the vision and perspective of its creation. Our mission with Inside-Out is to provide a modern point of view for lighting that reinforces the architectural perspective of the location with sculptural presence and simplicity.

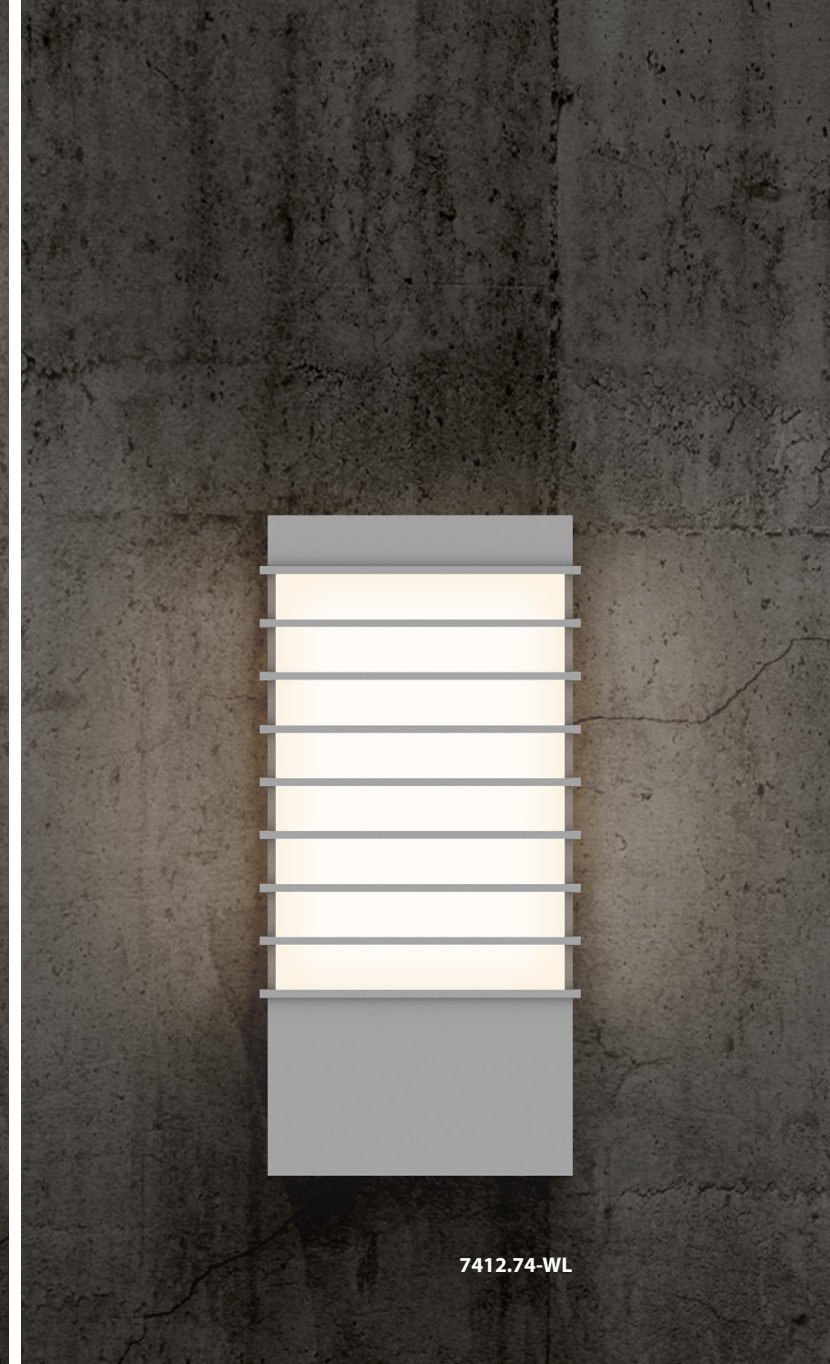

tawa™

A rectilinear column crisply delineates its white acrylic diffuser with rectangular ribs along its length. This rhythmically aligned composition has a solid, straightforward presence that echoes the idiom of modern architecture.

7413

Tawa 21" LED Sconce

21" H x 6 1/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 21" H x 6" W

Output: LED; 22W; 2,200 Lumens

(1,430 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7413.72-WL Textured Bronze

7413.74-WL Textured Gray

7413.98-WL Textured White

7412

Tawa 13" LED Sconce

13" H x 6 1/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 13" H x 6" W

Output: LED; 17W; 1,700 Lumens

(1,100 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7412.72-WL Textured Bronze

7412.74-WL Textured Gray

7412.98-WL Textured White



7411.72-WL



7410.98-WL



7411.74-WL

tawaTM slim

7410

Tawa 13" Slim LED Sconce

13" H x 4 3/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 13" H x 4 1/2" W

Output: LED; 13W; 1,300 Lumens

(850 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7410.72-WL Textured Bronze

7410.74-WL Textured Gray

7410.98-WL Textured White

7411

Tawa 21" Slim LED Sconce

21" H x 4 3/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 21" H x 4 1/2" W

Output: LED; 20W; 2,000 Lumens

(1,300 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent

WET LOCATION, ADA


7411.72-WL Textured Bronze

7411.74-WL Textured Gray

7411.98-WL Textured White

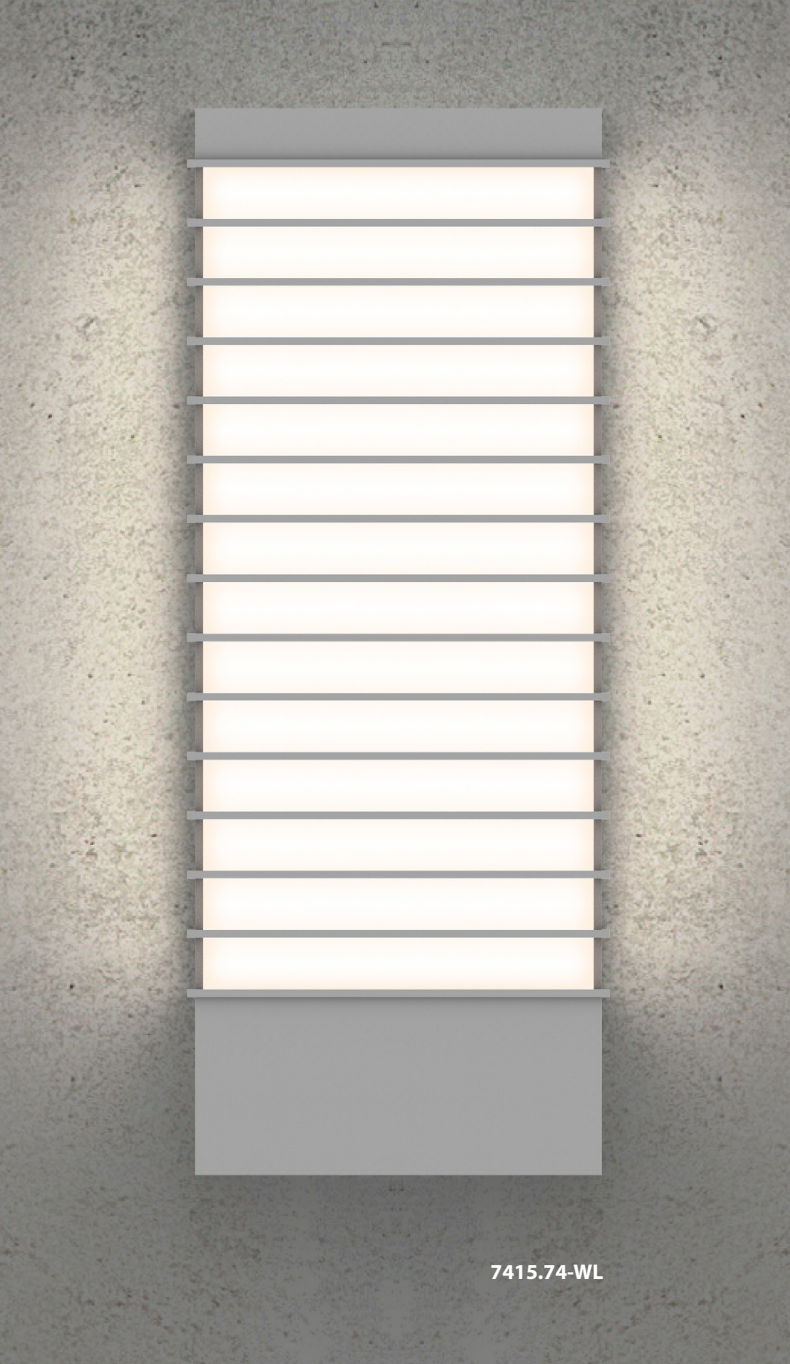

7415.74-WL

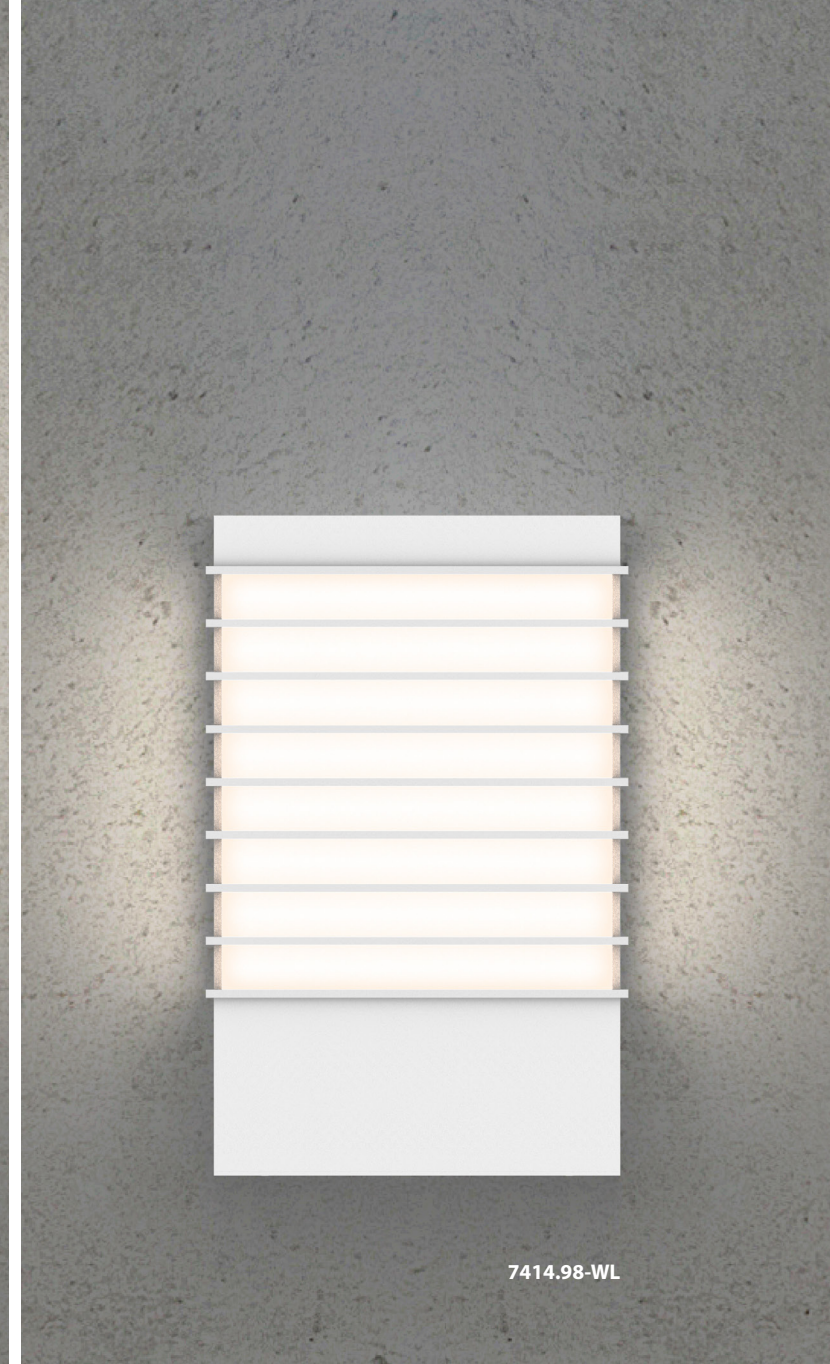

7414.98-WL



7414.72-WL

tawaTM wide

7415

Tawa 21" Wide LED Sconce

21" H x 8 1/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 21" H x 8" W

Output: LED; 30W; 3,000 Lumens

(1,950 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

WET LOCATION, ADA

7415.72-WL Textured Bronze

7415.74-WL Textured Gray

7415.98-WL Textured White

7414

Tawa 13" Wide LED Sconce

13" H x 8 1/4" W

Shade: Optical Acrylic

Extension: 3 1/4"

Wall Plate: 13" H x 8" W

Output: LED; 20W; 2,000 Lumens

(1,300 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7414.72-WL Textured Bronze

7414.74-WL Textured Gray

7414.98-WL Textured White

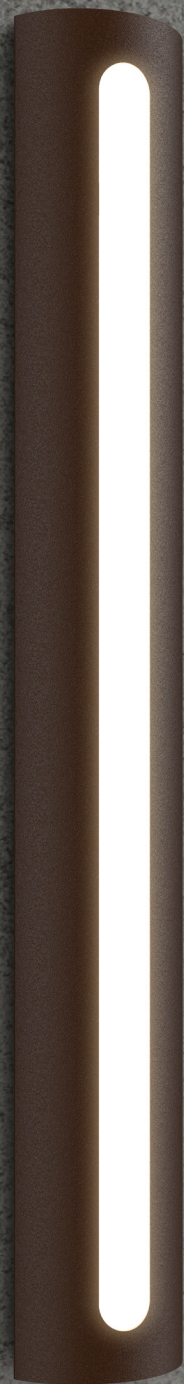

7444.72-WL

porta™

Illumination radiates from an embedded oval diffuser within a half-round pilaster column. Porta is a softly geometric approach to modern form from a classical architectural reference.



7440.72-WL

7440

Porta 18" LED Sconce

18 1/4" H x 5" W
Shade: Optical Acrylic
15 1/2" H x 1 1/2" W
Extension: 2"
Wall Plate: 18 1/4" H x 4 1/2" W
Output: LED; 10W; 600 Lumens
(260 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

7440.72-WL Textured Bronze
7440.74-WL Textured Gray
7440.98-WL Textured White



7442.74-WL

7442

Porta 24" LED Sconce

24 1/4" H x 5" W
Shade: Optical Acrylic
21 1/2" H x 1 1/2" W
Extension: 2"
Wall Plate: 24 1/4" H x 4 1/2" W
Output: LED; 10W; 630 Lumens
(275 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

7442.72-WL Textured Bronze
7442.74-WL Textured Gray
7442.98-WL Textured White




7444.98-WL

7444

Porta 36" LED Sconce

36 1/4" H x 5" W
Shade: Optical Acrylic
32" H x 1 1/2" W
Extension: 2"
Wall Plate: 36 1/4" H x 4 1/2" W
Output: LED; 15W; 900 Lumens
(400 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
and Standard (TRIAC) Incandescent
WET LOCATION, ADA

7444.72-WL Textured Bronze
7444.74-WL Textured Gray
7444.98-WL Textured White

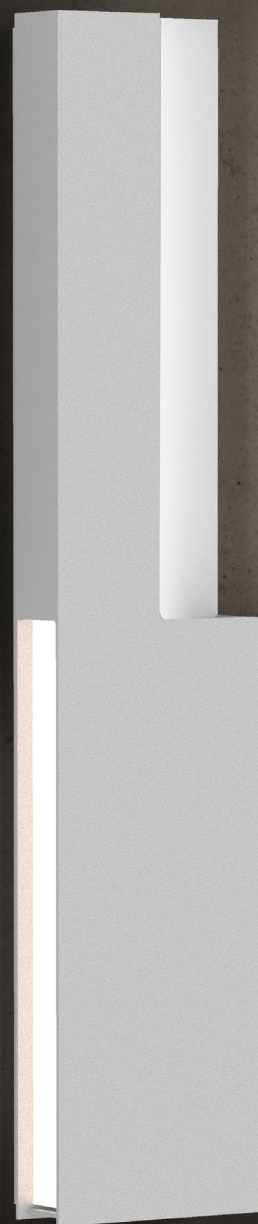

7432.98-WL

7432

Incavo 30" LED Sconce

30" h x 6" w
Shade: Aluminum
Extension: 2 1/2"
Wall Plate: 29 1/2" h x 5 1/2" w
Output: 2pcs LED; 16W; 1,900 Lumens
(350 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7432.72-WL Textured Bronze

7432.74-WL Textured Gray

7432.98-WL Textured White



7430.72-WL

7430

Incavo 20" LED Sconce

20" h x 6" w
Shade: Aluminum
Extension: 2 1/2"
Wall Plate: 19 1/2" h x 5 1/2" w
Output: 2pcs LED; 12W; 1,350 Lumens
(250 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION, ADA


7430.72-WL Textured Bronze

7430.74-WL Textured Gray

7430.98-WL Textured White

incavo™

Inspired by the aesthetic of industrial material architecture, this rectilinear volume has a notch cut through its face to reveal the reflected illumination on its interior surface, which is offset by the cut in its opposite edge that casts light on the wall.

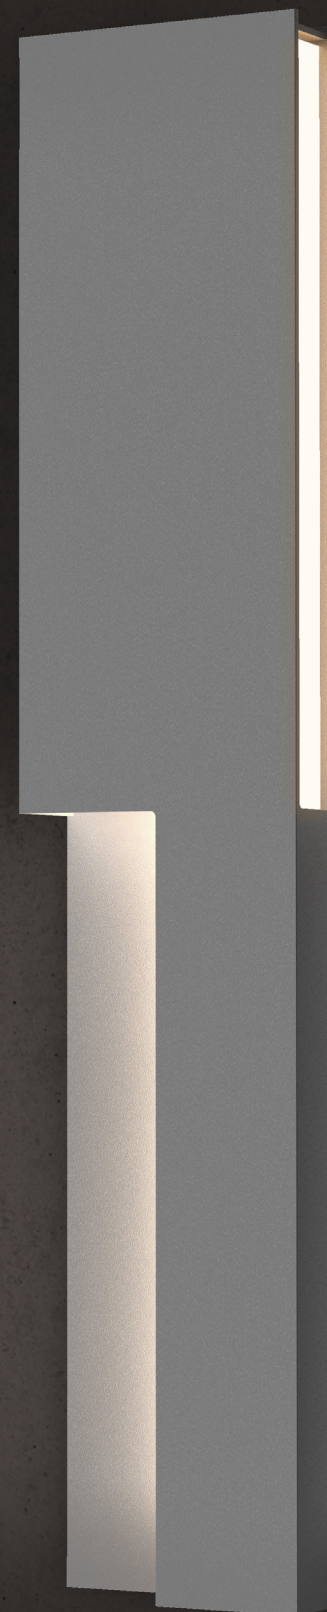


7432.74-WL



7434.72-WL

7435.98-WL

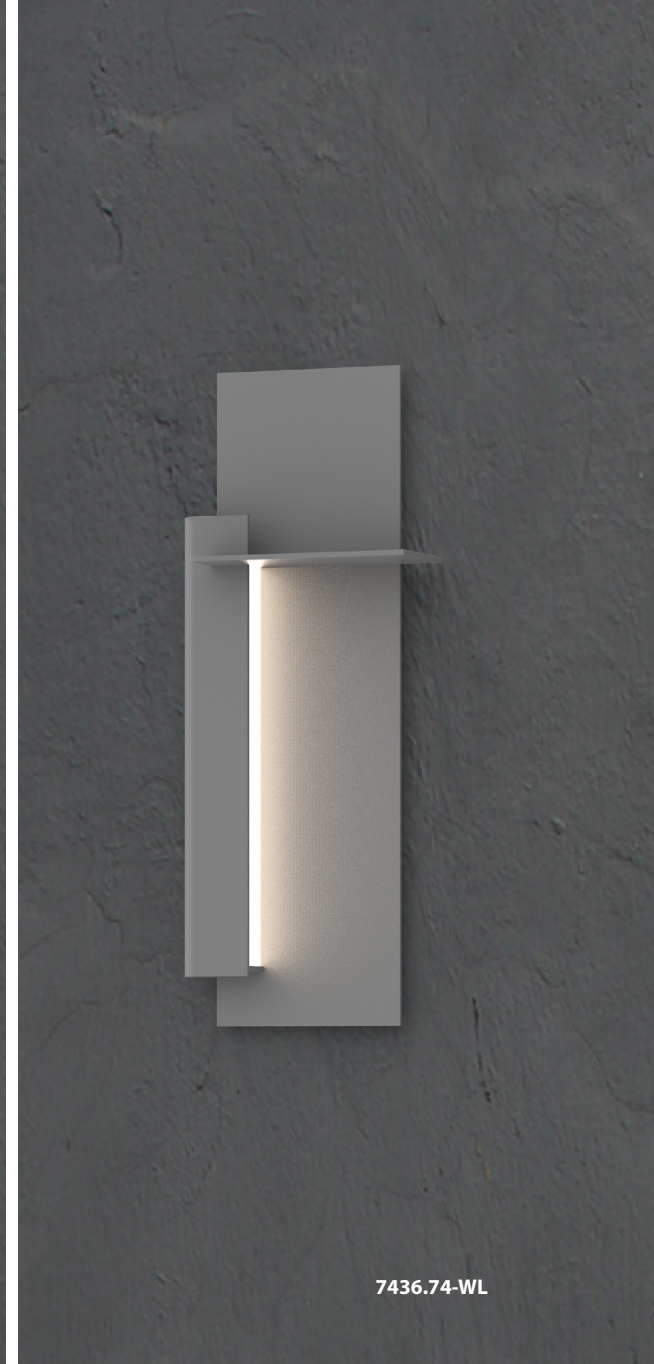

7436.74-WL



backgate™

Rolling one edge of the wall plate over forms the illumination cavity and allows directional light to graze and reflect across the face of the plate. The intersecting offset plane is commentary on the sculptural industrial aesthetic.



7437.72-WL

7434

Backgate 20" Right LED Sconce

20" H x 8 1/4" W
Shade: Aluminum
Extension: 3 3/4"
Wall Plate: 17 3/4" H x 4 1/2" W
Output: LED; 13W; 1,300 Lumens (750 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC)
Incandescent

WET LOCATION, ADA

7434.72-WL Textured Bronze
7434.74-WL Textured Gray
7434.98-WL Textured White

7435

Backgate 30" Right LED Sconce

30" H x 8 1/4" W
Shade: Aluminum
Extension: 3 3/4"
Wall Plate: 27 3/4" H x 4 1/2" W
Output: LED; 17W; 1,700 Lumens (1,000 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC)
Incandescent

WET LOCATION, ADA

7435.72-WL Textured Bronze
7435.74-WL Textured Gray
7435.98-WL Textured White

7436

Backgate 20" Left LED Sconce

20" H x 8 1/4" W
Shade: Aluminum
Extension: 3 3/4"
Wall Plate: 17 3/4" H x 4 1/2" W
Output: LED; 13W; 1,300 Lumens (750 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC)
Incandescent

WET LOCATION, ADA

7436.72-WL Textured Bronze
7436.74-WL Textured Gray
7436.98-WL Textured White

7437

Backgate 30" Left LED Sconce

30" H x 8 1/4" W
Shade: Aluminum
Extension: 3 3/4"
Wall Plate: 27 3/4" H x 4 1/2" W
Output: LED; 17W; 1,700 Lumens (1,000 Net Lumens);
Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC)
Incandescent

WET LOCATION, ADA

7437.72-WL Textured Bronze
7437.74-WL Textured Gray
7437.98-WL Textured White



7402.72-WL



7401.74-WL



7400.98-WL

7402

Lighthouse Tall LED Sconce

20 1/2" H x 5 1/2" W
Shade: Optical Acrylic
Extension: 3 1/4"
Wall Plate: 20 1/2" H x 5 1/2" W
Output: LED; 34W; 3,800 Lumens (2,400 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

WET LOCATION, ADA

7402.72-WL Textured Bronze

7402.74-WL Textured Gray

7402.98-WL Textured White

7401

Lighthouse LED Sconce

14 1/2" H x 5 1/2" W
Shade: Optical Acrylic
Extension: 3 1/4"
Wall Plate: 14 1/2" H x 5 1/2" W
Output: LED; 20W; 2,600 Lumens (1,600 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7401.72-WL Textured Bronze

7401.74-WL Textured Gray

7401.98-WL Textured White

7400

Lighthouse Short LED Sconce

8 3/4" H x 5 1/2" W
Shade: Optical Acrylic
Extension: 3 1/4"
Wall Plate: 8 3/4" H x 5 1/2" W
Output: LED; 11W; 1,300 Lumens (800 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7400.72-WL Textured Bronze

7400.74-WL Textured Gray


7400.98-WL Textured White

lighthouse™

Rhythmically aligned circular fins delineate the solid geometry of these luminaires, inside or out. Several available sizes scale in volume and length while maintaining Lighthouse's nautical feel. The substantial volume and rhythm lend a solid tone to the structure it lights.



7400.74-WL

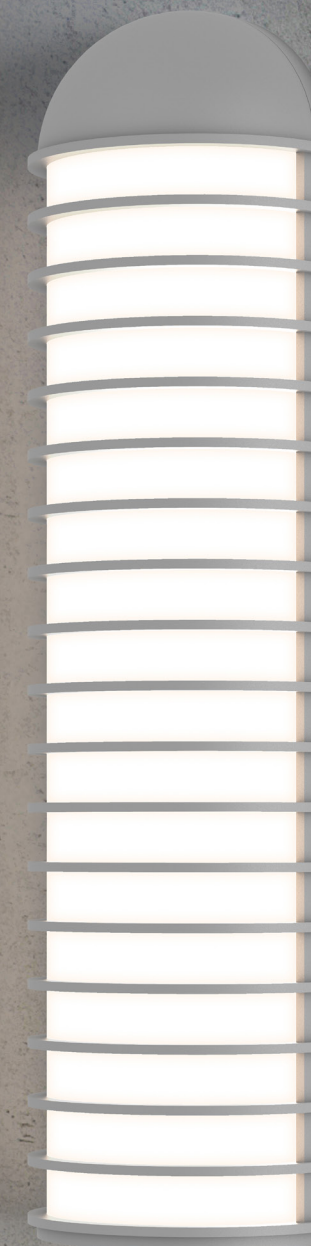

7402.74-WL



7404.72-WL



7404.74-WL



7404.98-WL

lighthouse[™] big

7404

Lighthouse Big LED Sconce

14 ¾" H x 8 ½" W

Shade: Optical Acrylic

Extension: 4 ¾"

Wall Plate: 14 ¾" H x 8 ½" W

Output: LED; 20W; 2,400 Lumens (1,500 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION

7404.72-WL Textured Bronze

7404.74-WL Textured Gray

7404.98-WL Textured White



7404.72-WL



7407.72-WL

7407.74-WL

7407.98-WL

lighthouse[™] planter

Big, bold, and welcoming, Lighthouse Planter brings brightness and the organic presence of plant life. Circular fins delineate the solid geometry of the luminaire that shines light outward and directs light downward toward the integrated planter.

7407

Lighthouse LED Planter Sconce

36" h x 8 1/2" w

Shade: Optical Acrylic

Extension: 4 3/4"

Wall Plate: 36" h x 8 1/2" w

Basket: 9" h x 7 1/2" w x 3 1/4" d

Output: LED; 20W; 2,400 Lumens (1,500 Net Lumens);

Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION

7407.72-WL Textured Bronze

7407.74-WL Textured Gray

7407.98-WL Textured White




7407.72-WL

INSIDE-OUT®

SONNEMAN
A WAY OF LIGHT

mezza vetro™


A white glass half dome on a circular disc integrates harmonious geometry across volume and plane, radiating light in full circumference.

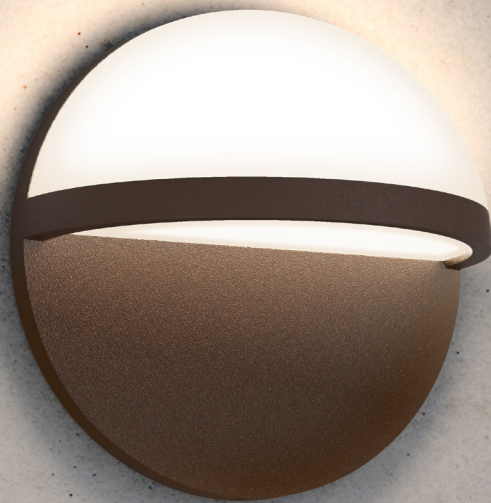

7473.72-WL

mezza cupola™

A cast aluminum half dome on a circular disc integrates harmonious geometry across volume and plane, directing light downward.

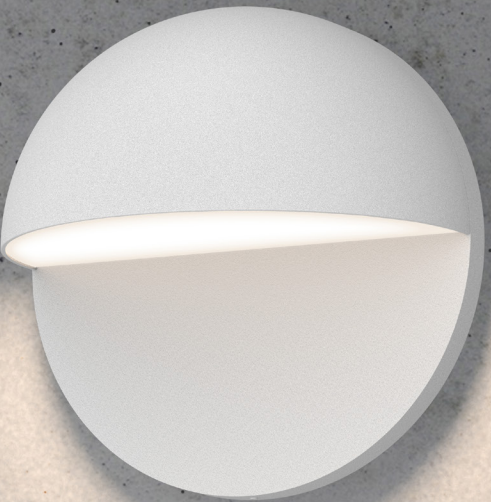

7472.98-WL

7471

Mezza Vetro 5" LED Sconce

5" DIA
Shade: White Etched Cased Glass
Extension: 3"
Wall Plate: 5" DIA
Output: LED; 8W; 950 Lumens (600 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION, ADA


- 7471.72-WL Textured Bronze
- 7471.74-WL Textured Gray
- 7471.98-WL Textured White

7473


Mezza Vetro 8" LED Sconce

8" DIA
Shade: White Etched Cased Glass
Extension: 4 1/2"
Wall Plate: 8" DIA
Output: LED; 13W; 1,500 Lumens (850 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION


- 7473.72-WL Textured Bronze
- 7473.74-WL Textured Gray
- 7473.98-WL Textured White

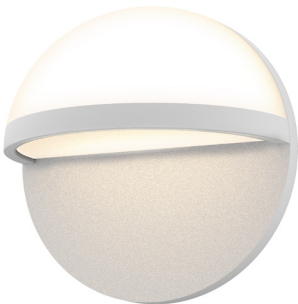


7473.98-WL



7471.74-WL

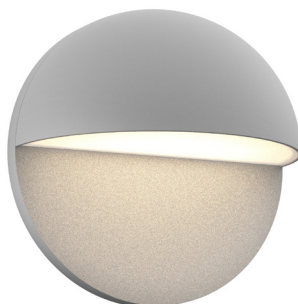

7472.74-WL



7470.72-WL

7470

Mezza Cupola 5" LED Sconce

5" DIA
Shade: Die-Cast Aluminum
Extension: 3"
Wall Plate: 5" DIA
Output: LED; 8W; 950 Lumens (430 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION, ADA


- 7470.72-WL Textured Bronze
- 7470.74-WL Textured Gray
- 7470.98-WL Textured White

7472

Mezza Cupola 8" LED Sconce

8" DIA
Shade: Die-Cast Aluminum
Extension: 4 1/2"
Wall Plate: 8" DIA
Output: LED; 13W; 1,500 Lumens (630 Net Lumens); Warm White 3000K; 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION

- 7472.72-WL Textured Bronze
- 7472.74-WL Textured Gray
- 7472.98-WL Textured White

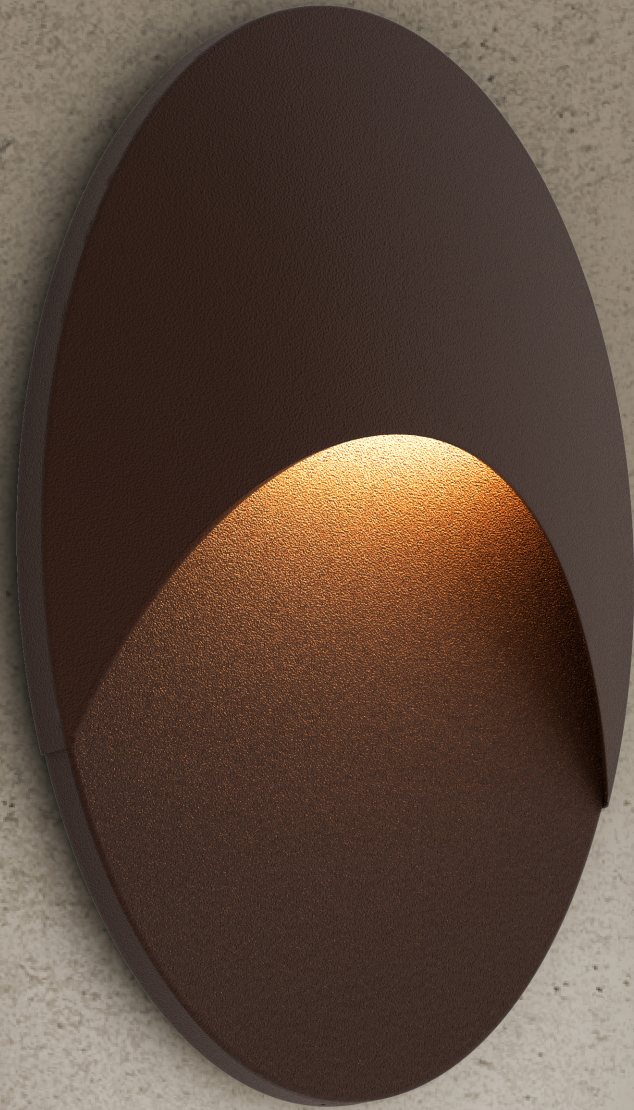

7462.72-WL



7460.74-WL

OVOS™ oval

Available in oval and round, these sophisticated forms radiate a soft reflected light from the interior, revealed by the elliptical cutaway in the domed shell.

7462

Ovos Oval LED Sconce

16" H x 10" W

Shade: Aluminum

Extension: 2 ¾"

Wall Plate: 16" H x 10" W

Output: LED; 13W; 1,200 Lumens

(720 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)


or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7462.72-WL Textured Bronze

7462.74-WL Textured Gray

7462.98-WL Textured White

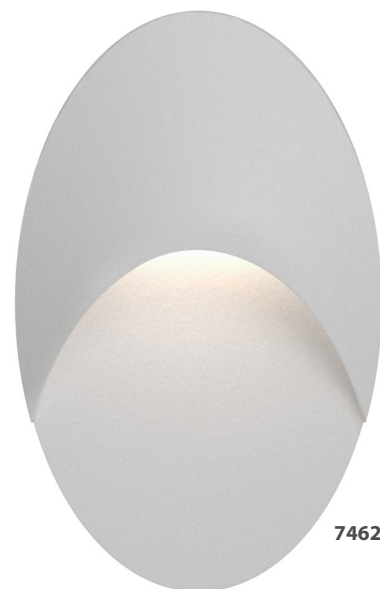

7462.98-WL



7460.98-WL

7460

Ovos Round LED Sconce

10" DIA

Shade: Aluminum

Extension: 2 ½"

Wall Plate: 10" DIA

Output: LED; 9W; 800 Lumens

(480 Net Lumens); Warm White (3000K); 90 CRI

Input: 120VAC w/LED Driver in Outlet Box

Dimming: Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent


WET LOCATION, ADA

7460.72-WL Textured Bronze

7460.74-WL Textured Gray

7460.98-WL Textured White

OVOS™ round

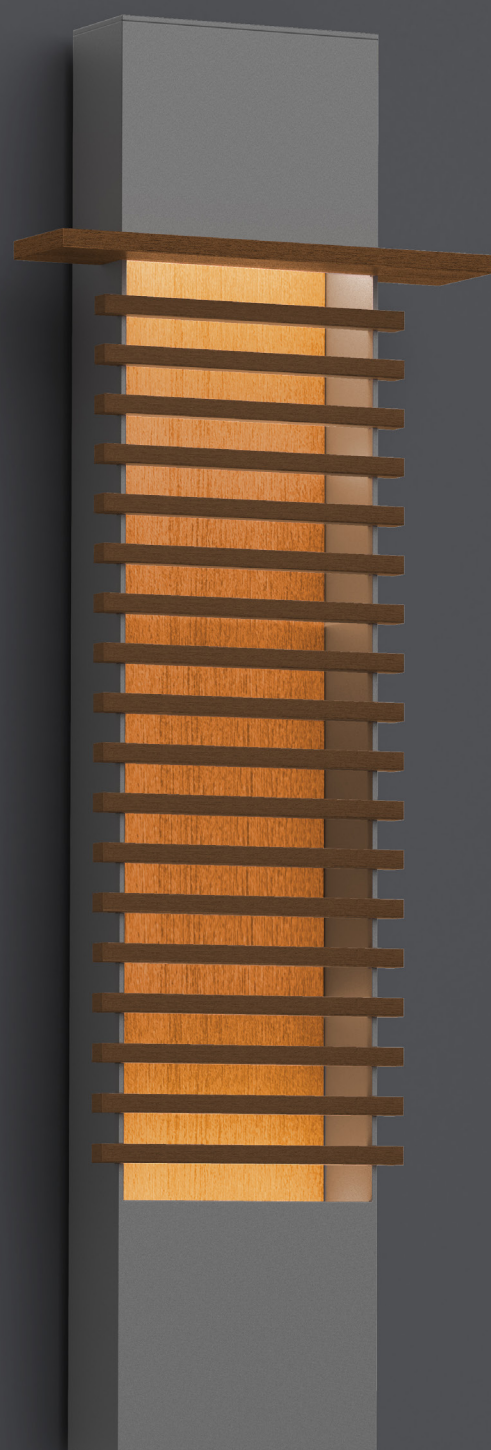

7418.74-WL

7418

Kengo 30" LED Sconce

30 1/4" H x 10" W

Shade: Aluminum w/Teak

Extension: 4 1/2"

Wall Plate: 29" H x 5" W

Output: LED; 19W; 1,900 Lumens

(200 Net Lumens); Warm White

(3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Fixture

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

WET LOCATION

7418.72-WL Textured Bronze

7418.74-WL Textured Gray



7417.74-WL

7417

Kengo 20" LED Sconce

20 1/4" H x 10" W

Shade: Aluminum w/Teak

Extension: 4 1/2"

Wall Plate: 19" H x 5" W

Output: LED; 19W; 1,900 Lumens

(100 Net Lumens); Warm White

(3000K); 90 CRI

Input: 120-277VAC w/LED Driver in Fixture

Dimming: Electronic Low Voltage (ELV)

and Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

WET LOCATION


7417.72-WL Textured Bronze

7417.74-WL Textured Gray



kengo

Square wooden louvers are mortised into the edges of a rectilinear opening in an aluminum box beam. Light is directed downward from within the space and reflected through the gaps in the plantation teak louvers providing a warm tone and even rhythm to the luminaire.

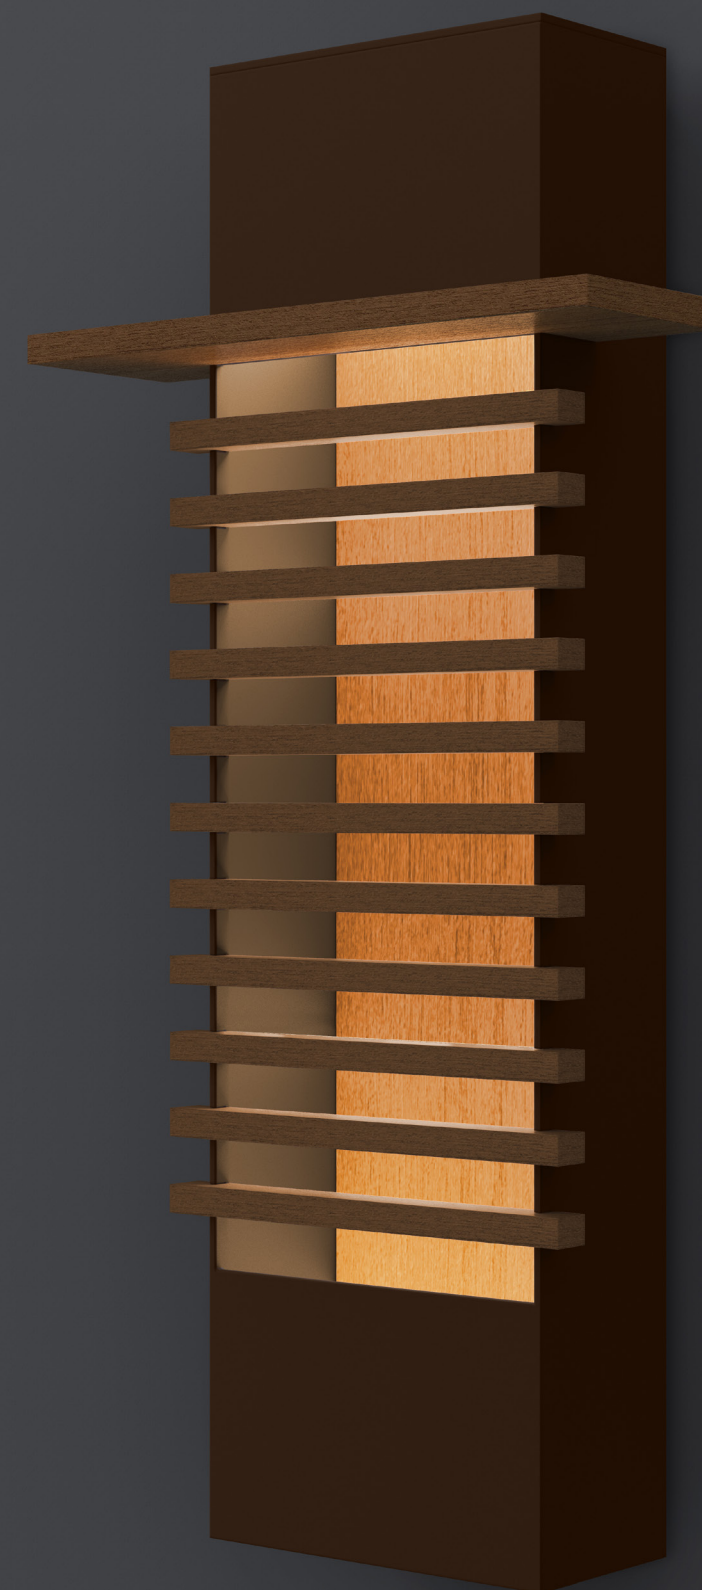



7480.72-WL
*Shown with included
bezel trim.*

7480

Flue 30" LED Sconce

30" h x 5" w
Shade: Aluminum
Extension: 4 ¾"
Wall Plate: 12" h x 4 ½" w
Output: LED; 9W; 900 Lumens (600 Net Lumens);
Warm White (3000K); 90 CRI
Downlight Bulb: (1) 7.5W, GU10 Base LED, MR16 (available)
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION

7480.72-WL Textured Bronze
7480.74-WL Textured Gray
7480.97-WL Textured Black
7480.98-WL Textured White



7482.97-WL
*Shown with included
acrylic trim.*

7482

Flue 40" LED Sconce


40" h x 5" w
Shade: Aluminum
Extension: 4 ¾"
Wall Plate: 12" h x 4 ½" w
Output: LED; 15W; 1,500 Lumens
(1,000 Net Lumens); Warm White (3000K); 90 CRI
Downlight Bulb: (1) 7.5W, GU10 Base LED, MR16 (available)
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION

7482.72-WL Textured Bronze
7482.74-WL Textured Gray
7482.97-WL Textured Black
7482.98-WL Textured White

flue™

Dramatically powerful in scale and presence, these bold pipes make a strong statement about the materials and details of the industrial aesthetic. Reflecting illumination back to the wall and directing an independent beam downward, the simplicity brings strength to the surface and surroundings.

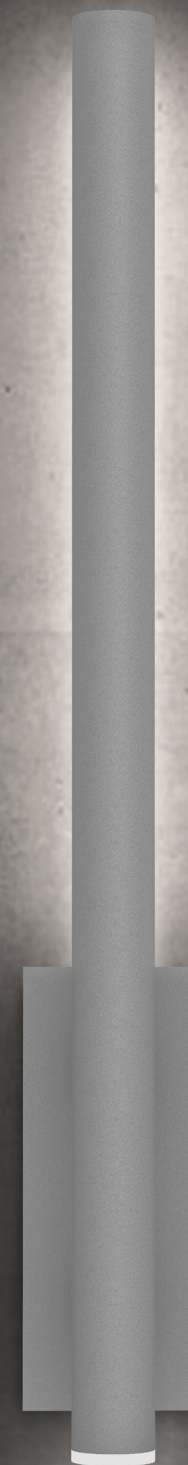


7482.74-WL
*Shown with included
acrylic trim.*


7447.98-WL

tairu™

A curved rectilinear reflector symmetrically radiates light from the centered LED source, softly illuminating the surrounding area.

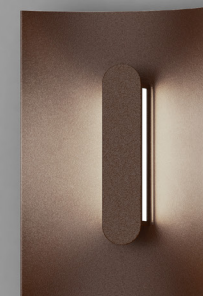

7445.72-WL

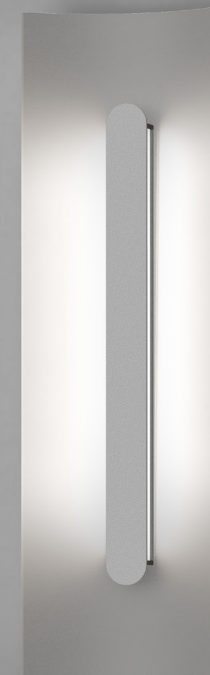

7447.74-WL



7449.98-WL

7445

Tairu 8" LED Sconce

8" h x 5 3/4" w
Shade: Aluminum
Extension: 1 3/4"
Wall Plate: 8" h x 4 1/2" w
Output: LED; 9W; 800 Lumens (300 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION, ADA

7445.72-WL Textured Bronze

7445.74-WL Textured Gray

7445.98-WL Textured White

7447

Tairu 18" LED Sconce

18" h x 5 3/4" w
Shade: Aluminum
Extension: 1 3/4"
Wall Plate: 18" h x 4 1/2" w
Output: LED; 17W; 1,600 Lumens (600 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION, ADA

7447.72-WL Textured Bronze

7447.74-WL Textured Gray

7447.98-WL Textured White

7449


Tairu 36" LED Sconce

36" h x 5 3/4" w
Shade: Aluminum
Extension: 1 3/4"
Wall Plate: 36" h x 4 1/2" w
Output: LED; 30W; 2,800 Lumens (1,050 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V
WET LOCATION, ADA

7449.72-WL Textured Bronze

7449.74-WL Textured Gray

7449.98-WL Textured White

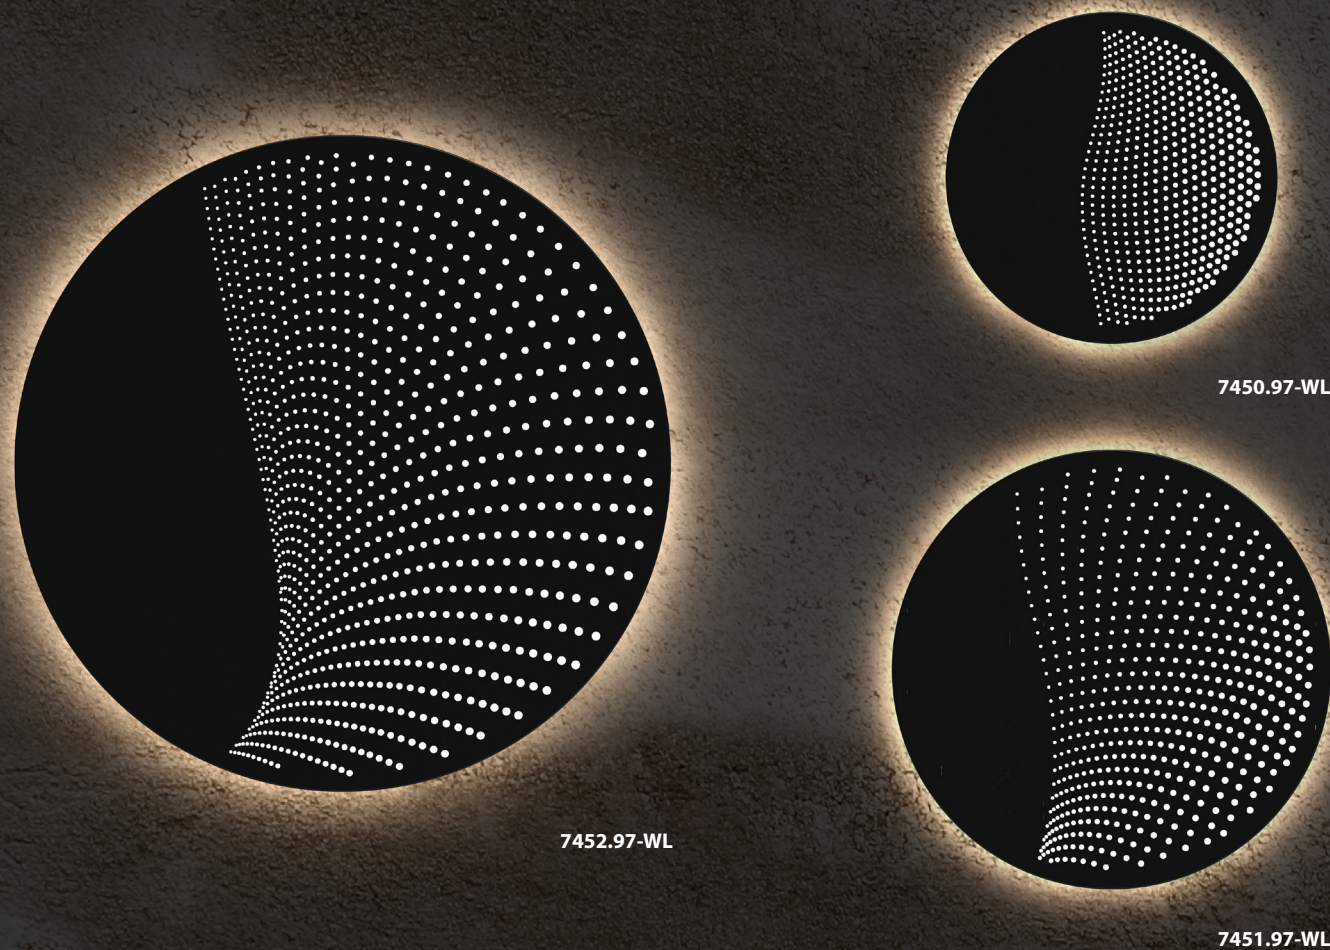

7452

Dotwave Large Round LED Sconce

15" DIA
Shade: Aluminum
Extension: 2"
Wall Plate: 13 3/4" DIA
Output: LED; 27W; 3,000 Lumens (1,000 Net Lumens); Warm White (3000K); 90 CRI
Input: 120-277VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

WET LOCATION, ADA

7452.97-WL Textured Black
7452.98-WL Textured White

7451

Dotwave Medium Round LED Sconce

10" DIA
Shade: Aluminum
Extension: 2"
Wall Plate: 8 3/4" DIA
Output: LED; 20W; 2,200 Lumens (720 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7451.97-WL Textured Black
7451.98-WL Textured White

7450

Dotwave Small Round LED Sconce

7 1/2" DIA
Shade: Aluminum
Extension: 2"
Wall Plate: 6 1/4" DIA
Output: LED; 19W; 2,000 Lumens (650 Net Lumens); Warm White (3000K); 90 CRI
Input: 120VAC w/LED Driver in Outlet Box
Dimming: Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA


7450.97-WL Textured Black
7450.98-WL Textured White

dotwave™


A progressive array of gradient pinholes in a variety of patterns permits illumination to penetrate the surface of the luminaire. This illuminated art radiates light in small micro-doses that individually reduce the glare of direct illumination but in unison with the hundreds of others produces a bright yet comfortable glow. Dotwave's incredible patterns are rendered on circles, squares, and rectangles, which also light the wall or ceiling surface from their perimeters.

7452.97-WL

INSIDE-OUT® | SONNEMAN
A WAY OF LIGHT

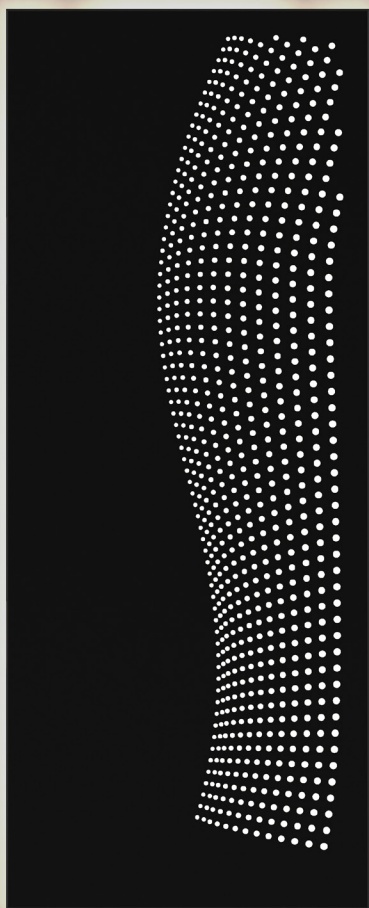

7458.97-WL

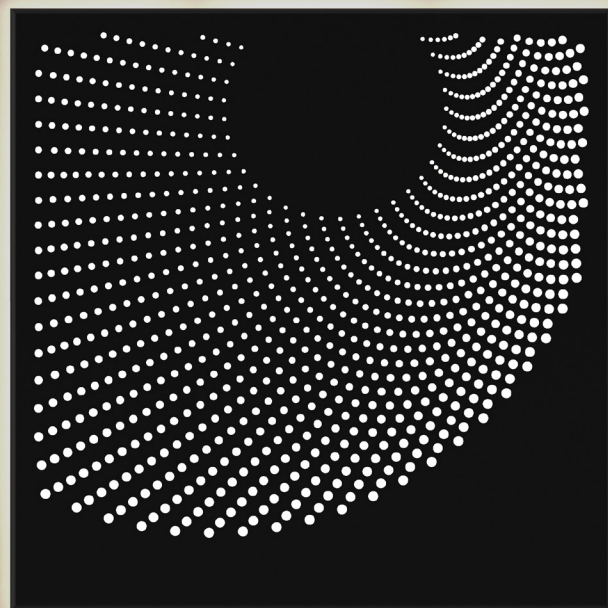

7456.97-WL

7458

Dotwave Rectangle LED Sconce

15 1/4" h x 6" w
 Shade: Aluminum
 Extension: 2"
 Wall Plate: 13 3/4" h x 4 3/4" w
 Output: LED; 20W; 2,200 Lumens
 (650 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/LED Driver in Outlet Box
 Dimming: Electronic Low Voltage (ELV) or
 Standard (TRIAC) Incandescent

WET LOCATION, ADA

7458.97-WL Textured Black

7458.98-WL Textured White

7456


Dotwave Square LED Sconce

10 1/4" h x 10 1/4" w
 Shade: Aluminum
 Extension: 2"
 Wall Plate: 8 3/4" sq
 Output: LED; 20W; 2,200 Lumens
 (650 Net Lumens); Warm White (3000K); 90 CRI
 Input: 120VAC w/LED Driver in Outlet Box
 Dimming: Electronic Low Voltage (ELV) or
 Standard (TRIAC) Incandescent

WET LOCATION, ADA

7456.97-WL Textured Black

7456.98-WL Textured White

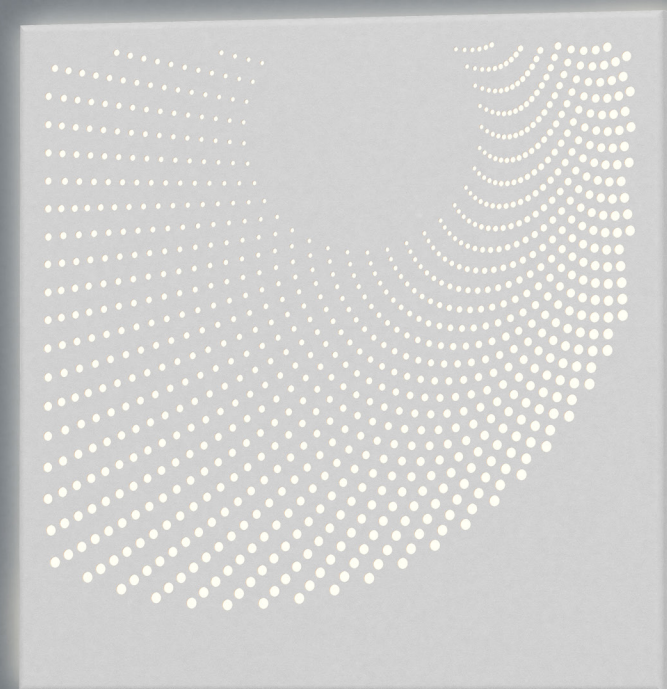

7456.98-WL

dotwave™


Dotwave's incredible patterns are rendered on circles, squares, and rectangles, which also light the wall or ceiling surface from their perimeters.

QUICK REFERENCE BY CATEGORY


systems




cubix™
pg. 6



constellation*
cosmic cube™
pg. 26



constellation*
andromeda™
pg. 30



constellation*
hedron™
pg. 36



coral surface™
pg. 100




purolinear 360™
pg. 124


pendants




cubix™
pg. 6




constellation*
cosmic cube™
pg. 26



constellation*
andromeda™
pg. 30



constellation*
hedron™
pg. 36



proton™
pg. 40



nebula™
pg. 44



sabon™
pg. 50



qux™
pg. 54




vines™
pg. 60



parisone™
pg. 68



friso™
pg. 74



meclisse™
pg. 78



movile™
pg. 82




papillons™
pg. 84



tela™
pg. 90



malibu discs™
pg. 96



abstraction™
pg. 106



aureola™
pg. 112



torc™
pg. 114



perfile™
pg. 116




keel™
pg. 120

QUICK REFERENCE BY CATEGORY

wall




sabon™
pg. 52



meclisse™
pg. 80



malibu discs™
pg. 98




coral surface™
pg. 100




keel™
pg. 122



purolinear 360™
pg. 124



fino™
pg. 136




gessato™
pg. 140




radio™
pg. 142



plaza™
pg. 144




tuo™
pg. 146



vanity™
pg. 148



vuoto™
pg. 150




tawa™
pg. 166




porta™
pg. 172




incavo™
pg. 174




backgate™
pg. 176



lighthouse™
pg. 178




mezza vetro™
pg. 184



mezza cupola™
pg. 185



ovos™
pg. 186




kengo
pg. 188



flue™
pg. 190




tairu™
pg. 192




dotwave™
pg. 194

QUICK REFERENCE BY CATEGORY


flush + semi-flush mounts




cubix™
pg. 18




sabon™
pg. 51




vines™
pg. 66




coral surface™
pg. 100




vuoto™
pg. 150




zoom™
pg. 152



ilios™
pg. 154



offset™
pg. 156




marue™
pg. 160

floor lamps



qux™
pg. 58



keel™
pg. 121

bath + vanity



keel™
pg. 123, 138



purolinear 360™
pg. 124



fino™
pg. 136



gessato™
pg. 140



radio™
pg. 142



plaza™
pg. 144



tuo™
pg. 146



vanity™
pg. 148

QUICK REFERENCE BY CATEGORY

indoor/outdoor



tawa™
pg. 166



porta™
pg. 172



incavo™
pg. 174



backgate™
pg. 176



lighthouse™
pg. 178



mezza vetro™
pg. 184



mezza cupola™
pg. 185



ovos™
pg. 186



kengo
pg. 188



flue™
pg. 190



tairu™
pg. 192



dotwave™
pg. 194

INDEX

by collection

A		L		R	
Abstraction™	106	Lighthouse™	178	Radio™	142
Aureola™	112				
B		M		S	
Backgate™	176	Malibu Discs™	96	Sabon™	50
		Marue™	160		
		Meclisse™	78		
C		Mezza Cupola™	185	T	
Constellation* Andromeda™	30	Mezza Vetro™	184	Tairu™	192
Constellation* Cosmic Cube™	26	Mobile™	82	Tawa™	166
Constellation* Hedron™	36			Tela™	90
Coral Surface™	100	N		Torc™	114
Cubix™	6	Nebula™	44	Tuo™	146
D		O		V	
Dotwave™	194	Offset™	156	Vanity™	148
		Ovos™	186	Vines™	60
				Vuoto™	150
F		P		Z	
Fino™	136	Papillons™	84	Zoom™	152
Flue™	190	Parisone™	68		
Friso™	74	Perfile™	116		
		Plaza™	144		
G		Porta™	172		
Gessato™	140	Proton™	40		
		Purolinear 360™	124		
I		Q			
Ilios™	154	Qux™	54		
Incavo™	174				
K					
Keel™	118, 138				
Kengo	188				

INDEX

by item number

1760	98	2901	89	3924	146
1761	98	2902	84	3941	140
1765	98	2904	84	3942	140
1766	98	2905	89	3943	140
1767	98	2907	89	3944	140
1768	98	2909	86	3951	142
1773	83	3081	72	3952	142
1780	112	3082	69, 71	3953	142
2060	52	3083	72	3954	142
2062	52	3085	73	7400	178
2063	53	3101	74	7401	178
2064	51	3102	76	7402	178
2065	45	3103	74	7404	180
2066	46	3110	80	7407	182
2067	48	3111	78	7410	169
2068	45	3113	78	7411	169
2069	51	3115	78	7412	166
2082	40	3121	90, 94	7413	166
2084	42	3122	93, 94	7414	170
2161	35	3151	114	7415	170
2162	32, 34	3152	114	7417	188
2164	33, 34	3153	114	7418	188
2165	35	3224	116	7420	160
2166	35	3272	110	7421	160
2168	29	3274	109, 110	7422	160
2169	26, 29	3281	64	7425	163
2170	36, 38	3283	60	7426	163
2191	102, 105	3285	62	7427	163
2191-03	105	3287	67	7430	174
2191-06	101, 105	3701	151	7432	174
2201	54, 56	3702	151	7434	176
2205	58	3703	151	7435	176
23QxxL233R120PHA	126	3733	155	7436	176
23QxxL244B120PHA	130	3734	155	7437	176
23QxxSR24R120PHA	130	3735	155	7440	173
24Z0001	14, 16	3736	155	7442	173
24Z0002	10, 16	3740	153	7444	173
24Z0003	8, 17	3771	136	7445	193
24Z0004	13, 17	3772	136	7447	193
24Z0005	18, 20	3773	136	7449	193
24Z0006	18, 20	3774	136	7450	194
24Z0007	21	3820	121	7451	194
24Z0008	20	3822	122	7452	194
24Z0009	20	3826	120	7456	196
2546	148	3828	120	7458	196
2547	148	3831	123, 138	7460	187
2548	148	3832	123, 138	7462	186
2549	148	3833	123, 138	7470	185
2551	148	3834	123, 138	7471	184
2727	158	3851	144	7472	185
2729	158	3852	144	7473	184
2731	158	3853	145	7480	190
2733	159	3921	146	7482	190
2735	158	3922	146		
2737	159	3923	146		

ADDITIONS 2020

We are pleased to present this 2020 addition to our expanding modern lighting presence. By integrating ever-advancing technology with timeless modern principles of form and function, we continue to innovate and create modern designs to illuminate and enrich spaces of all kinds.

Our team of talented architects, designers, and engineers provides a growing range of capabilities to address an increasing diversity of project requirements.

Today, SONNEMAN uses the efficient illuminating technology of LEDs, and new technologies of application and control throughout our extensive and growing line of over 2,000 products.

We are committed to provide design, innovation, and project relevance to the increasing architectural, commercial, hospitality, and residential clients that we are privileged to serve. SONNEMAN is ...*a way of light*.

Additional Background



Robert Sonneman, “Lighting’s Modern Master,” pioneered modern lighting in the 1960s and 1970s, making it an art form. His work has been exhibited internationally in museums, galleries, and design shows over the past five decades. Many of his designs have become classics of the modern era. Sonneman continues to be the recipient of numerous awards in recognition of excellence in design.

Utilizing innovative approaches to clean modern design, he has been instrumental in redefining the industry. Sonneman has developed a unique perspective on Modernism that honors the past and looks forward to the future, incorporates a functional sensibility and a wide-ranging design vocabulary, and utilizes technology to generate products that illuminate and compliment the architectural genres and design movements of the 20th and 21st centuries.

SONNEMAN – A WAY OF LIGHT
20 North Avenue Larchmont, New York 10538
P. 914.834.3600

e-mail: csr@sonnemanawayoflight.com
www.sonnemanawayoflight.com



Copyright ©2020 SONNEMAN – A WAY OF LIGHT

SONNEMAN[®]
A WAY OF LIGHT