

A WAY OF LIGHT

This catalog is a compendium of our design innovations, including our 2019 introductions.

In addition, our **Suspenders® catalog Vol. 5** presents our greatly expanded Suspenders system and new introductions.

Featured Product on Cover:

Intervals - Etched Bell w/Bell Reflector | Page 32







systems

We've greatly expanded our decorative architectural lighting systems. Comprised of modular elements or individual LED lighting sculptures, they have the capability to be interconnected or used in multiples to form scalable works of art with limitless expansion – providing stunning design and world-class illumination to commercial, hospitality, and residential spaces.

| Page 10

SECTIONS BY CATEGORY

sculptural

Sculptural is a modern style of free-flowing forms that connect functionality with sculptural expression in an original style. Contrasting to the sharp edges and solid geometry of modernism, Sculpturalism acclaims a soft, sensuous, and fluid continuity of shape and form. Page 86





architectural


Architectural is a modern style that refers to minimal, functional, geometric designs as expressions of modern architectural applications.

| Page 124

bath

Ranging from sleek and minimal to bold and expressive modern designs, our collections of bath bars and sconces bring generous, pristine LED illumination and decorative interest to a luxurious setting.

| Page 294

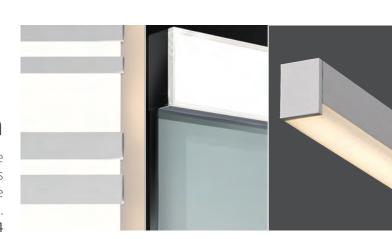


inside-out®

Our Inside-Out collection relates to the architectural notion of connecting the interior to the exterior of a space with beautifully executed forms of sculptural presence and simplicity that are equally at home inside or out.

Page 338

multi-forms

Multi-forms are lighting compositions of multiple elements often composed of abstract or geometrically shaped glass or metal pendants of singular or multiple sizes. Created to be used in a variety of configurations, Multi-form configurations create scalable, dazzling, luminous arrangements of exquisite variety, shapes, and sizes. | Page 244

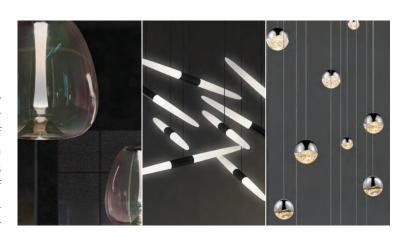

contemporary classics

Contemporary Classics represent the evolutionary pre-technology stages of Modernism from Bauhaus to Mid-Century to Post Modernism. Contemporary Classics refer to an eclectic approach to developing modern design from historical and culturally diverse inspirational references. Most notable is the decorative arts movement of the 20th century and the Post Modernism architecture of the mid-to late 1980s

| Page 412





intervals®

Intervals is a uniquely integrated linear architectural lighting system of rhythmically-aligned bidirectional illumination, with a range of available decorative and functional trims.

Architecturally scaled, the suspended horizontal beams span long lengths within a space, supported from ceiling-mounted cables or stems and forming a dramatically powerful approach to illuminating architecturally expansive locations.

| Page 26

ballet™

Poised in opposing positions, softly tapered acrylic forms radiate LED illumination. Asymmetrically counterbalanced, these double-tapered elements are arranged in a symmetrical cluster to form a dazzling luminous dance of interactivity. Suspended from a single multi-arm canopy or mounted individually to the ceiling in a radial pattern allows for scaling of the diameter of the fixture.

| Page 264

mela™

Mela is an apple-like shape of softly-dichroic, blown glass that surrounds a luminous LED core of white etched acrylic.

Page 246

calla™


Calla radiates a soft luminous glow through its translucent petal-like shades. | Page 119

abstract™

Indirect LED illumination is reflected on a wall or ceiling from a prism-shaped reflector that hovers over the surface on thin rods extended in tension from each of the three triangular corners. Reflectors are available in three sizes and can be arranged into a unique, abstract surface sculpture of illumination.

| Page 120




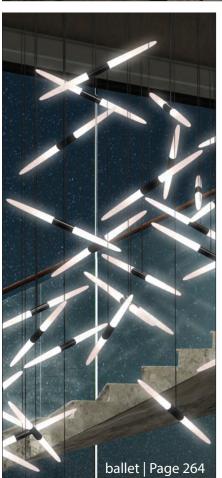







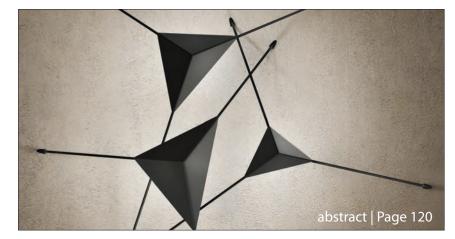

NEW 2019

We continue to pursue our passion for creating superb illumination. Design is a continuum, a continuity of discovery driven by innovation, technology, and a compelling desire to grow and evolve. We have embraced the modern experience of architecture, design, and technology to move our investigation towards our ever-expanding curiosity in our relentless pursuit of what's next.











ola™

Ola is a softly flowing modular system of linear elements that can be suspended individually or connected in multiple arrangements.

| Page 14

light chimes[™]

Slender cylindrical forms, in two lengths suspended at varying heights, reveal their LED illuminated, white etched acrylic lenses in dramatically elegant and minimal configurations.

| Page 232

constellation® - aquarius

Aquarius is "The Great One;" it is a broad constellation of uniform brightness across a vast space of sky. Expansive, covering a large range of space, Aquarius is the latest innovative design configuration of our Constellation architectural lighting system.

Page 58

suspenders®

We have expanded our Suspenders system with numerous new decorative and functional components, including 44 Luminaires and 7 Power Bar arrangements. Explore our Suspenders Catalog, Volume 5.

glide™

A flared "V"-shaped linear form, with a continuous radius end, defines a minimal profile directing light bidirectionally. Precisely sophisticated, Glide's modern sleekness is designed to provide balanced LED illumination along a linear situation for both general and task applications.


| Page 152

leaf ™


Reminiscent of a freshly-grown stem with two leaves, Leaf offers a bold yet organic feel to a space. Soft LED illumination is reflected onto the wall from leaf-like shades, producing a warm radiant glow.

| Page 118



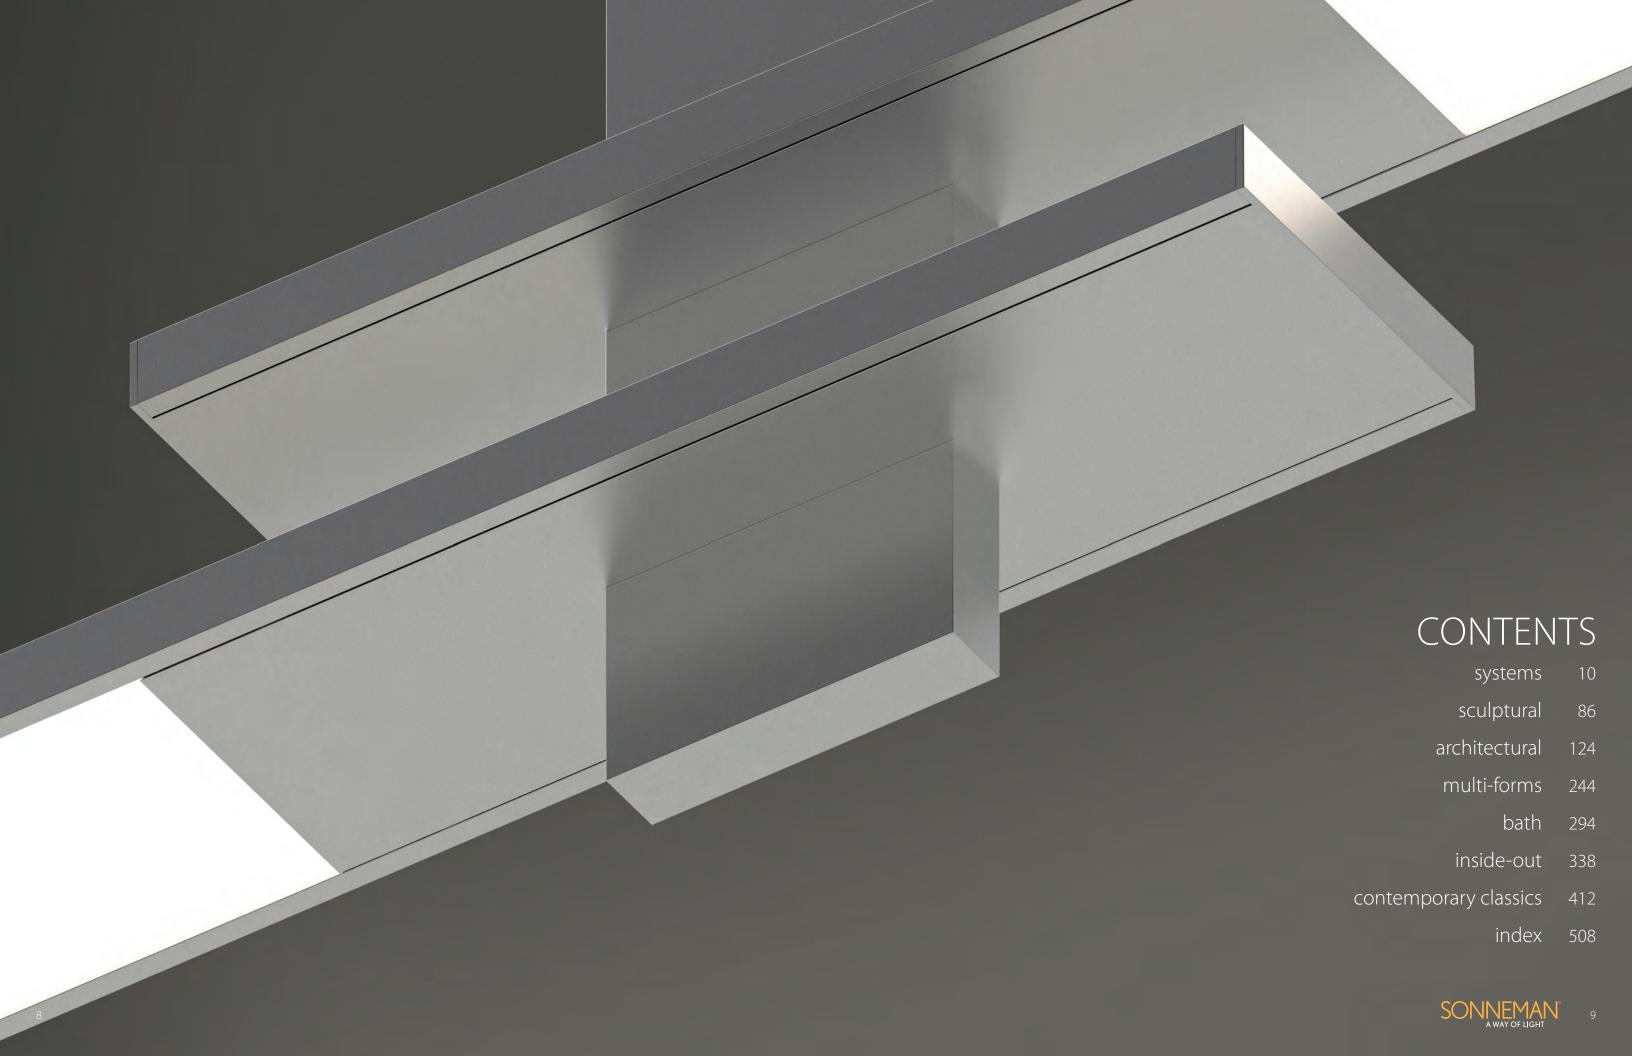







suspenders® is...

A delicately scaled, modular system of interconnected elements and suspended LED luminaires. Suspenders can be configured and customized as individual lighting sculptures or as a tiered web of infinite scope and variety. The Suspenders system harmoniously integrates functional and decorative luminaires, providing the ability to add focused light or the soft glow of indirect illumination to any application.



See our **NEW SUSPENDERS CATALOG** with our 2019 introductions, or visit our website for product line information and details.







22QKRL01120PHA



Ola is a softly-flowing modular system of linear elements that can be suspended individually or connected in multiple arrangements. Connected end to end, they can form a continuous ribbon of light in a nearly limitless linear configuration.

22QxCL02120PHA

Ola Double Linear LED Pendant

7 ½" H x 55" W x 2 ½" D Shade: Aluminum w/Optical Acrylic 1 ¾" H X 25 ¾" W X 2 ½" D Canopy: 2" H x 6" DIA w/6' Adjustable Cord/Cable LED: (2) 24W (total), 2200 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

22QKCL02120PHA Satin Black 22QWCL02120PHA Satin White

22QxRL01120PHA

Ola Single Linear LED Pendant 7 ½" H × 28" W × 2 ½" D Shade: Aluminum w/Optical Acrylic 1 ¾" н x 25 ¾" w x 2 ½" D Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord/Cable LED: 12W, 1100 Lumens (700 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

22QKRL01120PHA Satin Black 22QWRL01120PHA Satin White





22QxCT01120PHA

Ola Tri-Star LED Pendant 7 ½" H x 55" DIA 7 ½" H x 55" DIA

Shade: Aluminum w/Optical Acrylic

1 ¾" H x 25 ¾" w x 2 ½" D

Canopy: 2" H x 6" DIA w/6' Adjustable Cord/Cable

LED: (3) 36W (total), 3300 Lumens (2100 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV) or

Standard (TRIAC) Incandescent

22QKCT01120PHA Satin Black **22QWCT01120PHA** Satin White Ola's softly-flowing, luminous elements are shown here in suspension, joined with the 120-degree connector at the center of the Tri-Star configuration.




Ola is a modular system composed of Connectors, Luminaires, and Power Feeds. To build a configuration, specify: the desired number of Luminaires (22Lx273090DS); the appropriate Connector styles—End Hanger, Linear Hanger, Angle Hanger, or Y Hanger—with the Connector below the desired Power Feed location specified as a Power Cord Suspension Type; and an appropriate Power Feed based on the total number of luminaires and installation condition.

STRAIGHT CONNECTORS




GEOMETRIC CONNECTORS

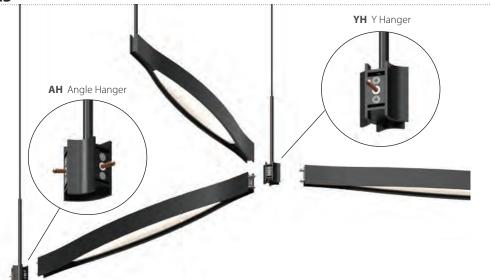


POWER FEED STYLES

For Remote or Outlet Box Driver Location




For Canopy Driver Location



For Switch Driver Location

Ola requires a 24V constant voltage LED driver between the line voltage circuit and the Power Feed of the system. The driver is typically installed either in the outlet box above the Power Feed, in the Power Feed canopy, or in a remote and accessible location. For installations where these options are not desired or feasible, we offer a special wall dimmer switch with a built-in LED driver, which replaces your existing wall switch; no special wiring is required beyond the existing two wires between the switch and the outlet box. Available in 60W and 100W versions, and includes interchangeable face plates in three finishes: Gloss White, Gloss Light Almond, and Gloss Brown.



Wall Dimmer Switch with Built-in 24V LED Driver

OLA™ SPECIFICATIONS: how to order

Specify your Ola System by building the item numbers for your Luminaires, Connectors, and Power Feeds using the tables below, selecting from left to right the desired option from each column. Or for simplified ordering, select one of our Preconfigured Quick Spec styles from the table below or on the following page.

STANDARD ORDERING

Luminaire Ordering Table

Family	Category	Finish (×)	Specification	ons
22 Ola	L Luminaire	K Satin Black	273090DS	12W, 1100 Lumens (700 Net Lumens), Warm White (3000K), 90 CRI, downlight
		W Satin White		

Example Luminaire Item Number:

2 2 L K 2 7 3 0 9 0 D S

Connector Ordering Table

Family	Category	Finish (x)	Hanger Type	Electrical Type	Suspension Type	Suspension Length
22 Ola	C Connector	K Satin Black	EH End Hanger	1 Live	0 Cable	06 6 feet
		W Satin White	LH Linear Hanger		1 Small Power Cord ¹	20 20 feet
			AH Angle Hanger		2 Large Power Cord ²	
			YH Y Hanger		1	Example Connector Item Number:

2 2 6 1/ 5 11 1 0 0 6



Power Feed Ordering Table

Family	Category	Finish (x)	Driver Location	Luminaire Qua	ntity	Driver Input Voltage	Driver Dimming
22 Ola	F Power Feed	K Satin Black	C Canopy ³	01 One	08 From 5 to 8 ⁶	120 120V	PHA Phase (Triac/ELV)
		W Satin White	R Remote/Outlet Box 4	03 Up to 3	14 From 8 to 14 ⁷	230 230V	010 0-10V
			S Switch 5	04 Up to 4 ⁶	25 From 15 to 25 ⁷	277 277V	SWT Built-in switch ⁶
				07 From 4 to 7	38 From 26 to 38 ⁷		

Example Power Feed Item Number:

2 2 F K R O 1 1 2 O P H A

PRECONFIGURED QUICK SPEC ORDERING

Family	Category	Finish (x)	Driver Location	Style/Size	Driver Input Voltage	Driver Dimming
22 Ola	Q Quick Spec	K Satin Black	C Canopy	L01 Single Linear	120 120V	PHA Phase (Triac/ELV)
		W Satin White	R Remote/Outlet Box 8	L02 Double Linear	230 230V	010 0-10V
			S Switch 9	L03 Triple Linear	277 277V	SWT Built-in switch ⁶
				R01 Single Ring 10		
				T01 Tri-Star		

Example Quick Spec Item Number:



- Only one Power Cord is required per Power Feed; for use with Luminaire Quantity up to 8; must specify Connector Style EH
- ² Only one Power Cord is required per Power Feed; for use with Luminaire Quantity up to 38
- ³ For use with Luminaire Quantity up to 3
- Driver can be installed in a standard 4" octagon outlet box only when specifying Luminaire Quantity 01
- ⁵ Requires use of our provided wall dimmer switch with built-in LED driver on a dedicated circuit; must specify Luminaire Quantity **04** or **08**, Driver Input Voltage **120**, and Driver Dimming **SWT**

- ⁶ Must specify Driver Location **S**
- Must specify Driver Location R and Driver Dimming 010; remote housing not provided
- 8 Driver can be installed in a standard 4" octagon outlet box only when specifying Style/Size L01
- ⁹ Requires use of our provided wall dimmer switch with built-in LED driver on a dedicated circuit; must specify Driver Input Voltage 120, and Driver Dimming SWT
- 10 Must specify Driver Location **R** or **S**




ola™: quick spec styles

ola™: planning styles

These preconfigured styles can be ordered with a single item number, and only the finish, style, and driver information needs to be specified; see the Quick Spec ordering table on the previous page.

SINGLE LINEAR (L01) SINGLE RING (R01) Bottom View **DOUBLE LINEAR (L02)** TRI-STAR (T01) 55" DIA

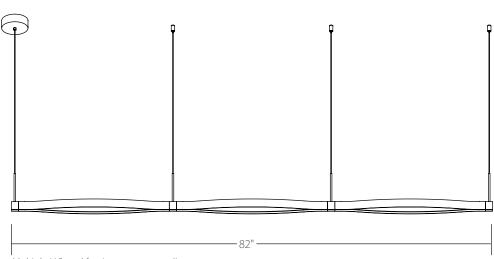

An infinite variety of hexagonal, honeycomb, and abstract configurations can be built to fit the scale and style of a space. Below are three examples of planning styles that can be used, and the item numbers and quantities necessary to order the configurations shown; simply replace "x" with your desired finish: Satin Black (**K**) or Satin White (**W**).

ASYMMETRIC LINEAR


How to Order p.21

Bottom View

ASYMMETRIC LINEAR Item Numbers

22Lx273090DS (Quantity 16) 22CxEH1006 (Quantity 6) 22CxAH1006 (Quantity 6) 22CxAH1206 22CxYH1006 (Quantity 4) 22FxR25120010 (Quantity 1)

ASYMMETRIC CLUSTER




Bottom View

ASYMMETRIC CLUSTER Item Numbers

22Lx273090DS (Quantity 22) 22CxEH1006 (Quantity 8) (Quantity 8) 22CxAH1006 22CxAH1206 (Quantity 1) 22CxYH1006 (Quantity 6) 22FxR25120010 (Quantity 1)

GEOMETRIC GRID

Bottom View

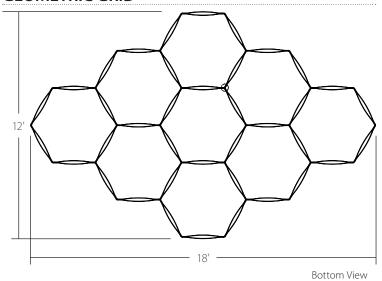


GEOMETRIC GRID Item Numbers

22Lx273090DS (Quantity 38) (Quantity 14) 22CxAH1006 22CxYH1006 (Quantity 15) 22CxYH1206 (Quantity 1) 22FxR38120010 (Quantity 1)


TRIPLE LINEAR (L03)

ola

The large-scale installation shown on page 18 is made up of three sections, shown below, with the item numbers and quantities necessary to order this configuration; simply replace "x" with your desired finish: Satin Black (**K**) or Satin White (**W**).

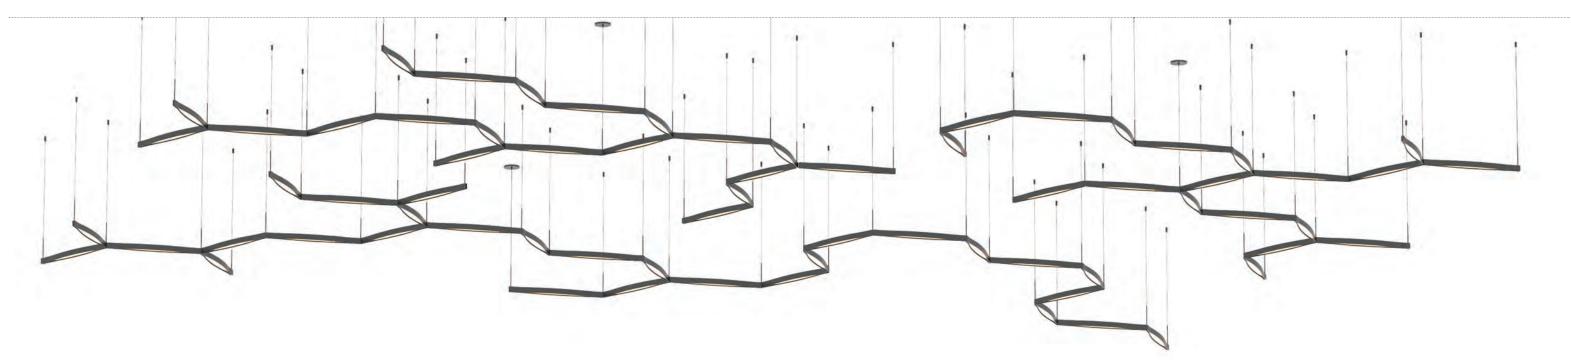

INSTALLATION SECTION 1

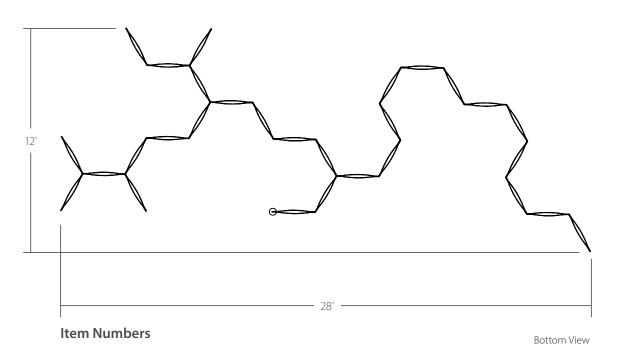


22Lx273090DS (Quantity 29)
22CxEH1006 (Quantity 6)
22CxEH1206 (Quantity 1)
22CxAH1006 (Quantity 18)
22CxYH1006 (Quantity 5)
22FxR38120010 (Quantity 1)

INSTALLATION SECTION 2

22Lx273090DS	(Quantity 20)
22CxEH1006	(Quantity 6)
22CxAH1006	(Quantity 10)
22CxAH1206	(Quantity 1)
22CxYH1006	(Quantity 4)
22FxR25120010	(Quantity 1)

Item Numbers

INSTALLATION SECTION 3



22Lx273090DS	(Quantity 18)
22CxEH1006	(Quantity 6)
22CxAH1006	(Quantity 9)
22CxYH1006	(Quantity 3)
22CxYH1206	(Quantity 1)
22FxR25120010	(Quantity 1)


Bottom View

SYSTEMS | SONNEMAN A WAY OF LIGHT







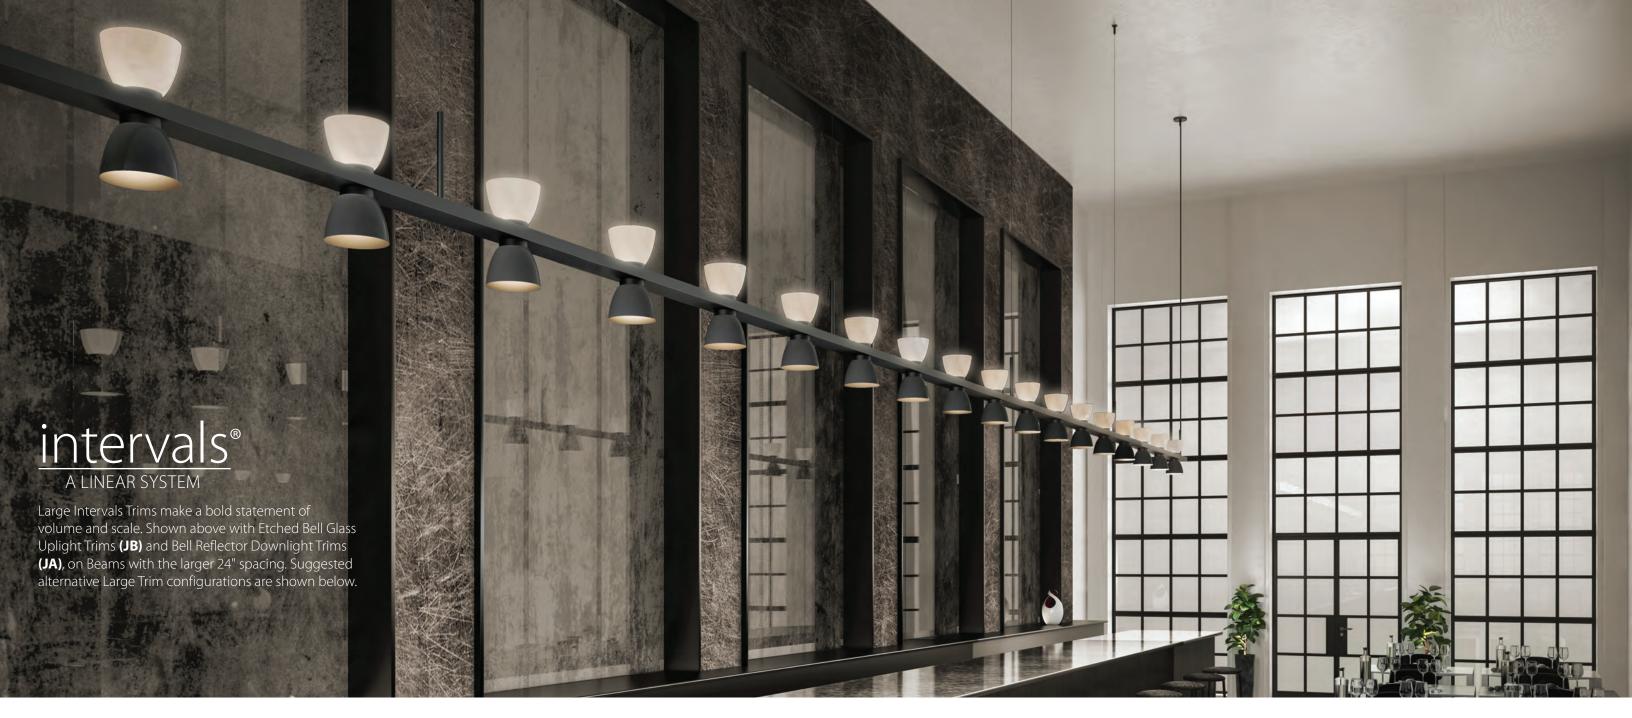

LARGE BELL OPTIONS:

Etched Bell (JB)

Etched Bell (JB)

Etched Bell (JB)

Round Bezel (A) Round Bezel (A)

LARGE CONE OPTIONS:

Etched Cone **(KB)**

Etched Cone (KB)

Etched Cone **(KB)**

Round Bezel (A) Round Bezel (A)



Bell Reflector (JA)



Etched Bell (JB)



Round Tall Snoot (DB)



Bell Reflector (JA)



Etched Bell (JB)



Cone Reflector **(KA)**



Etched Cone (KB)



Round Tall Snoot (DB)



Cone Reflector (KA)



Etched Cone (KB)






The soft and subtle curves of hand-blown clear glass enclose a luminous core of frosted acrylic in this Pear Glass Uplight Trim **(LC)**. Shown here paired with the Round Snoot Downlight Trim **(DA)**, which provides visual weight and glare-free downlighting.



Larger scale Uplight Trims, such as this Wave Top Cylinder **(LA)**, can be combined with lower profile Downlight Trims for clean sight lines under the Beam. Suggested alternative Downlight Trim pairings are shown below.



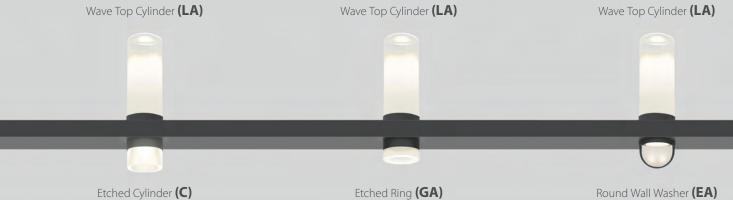







Intervals offers multiple Light Engine options, allowing multiple application-specific functions to be met on the same Beam. Here, low-glare Round Snoots **(DA)** are mounted to Fixed Downlights **(1)**, with Round Aimable **(2)** Light Engines added to highlight artwork and other areas of interest.



Round Aimable (2) w/Round Aimable (A)





Fixed Downlight **(1)** w/Round Snoot **(DA)**



Intervals Square Bezel Downlight Trim **(FA)** makes a crisp, geometric statement with its die-cast aluminum construction that mirrors the rectangular precision of the Beam.





UPLIGHT TRIM OPTIONS:

The Intervals system is available with a wide range of decorative and functional trims and light engines. Each Intervals Beam can be specified with any one of the Uplight Trims and up to five Downlight Trims allowing Intervals to be configured to meet an infinite range of lighting needs and decorative styles.

LARGE GLASS LC LA **MID-SIZE GLASS** JB Clear Pear KB Wave Top Cylinder HB FB HA FC **Etched Cone** Etched Bell LOW PROFILE BEZELS Clear w/Cube Clear w/Cone Etched Cylinder Clear Ribbon Etched Ribbon **Etched Cube** FA Α Round Bezel Square Bezel


DOWNLIGHT TRIM OPTIONS:




LARGE GLASS, SNOOTS AND REFLECTORS





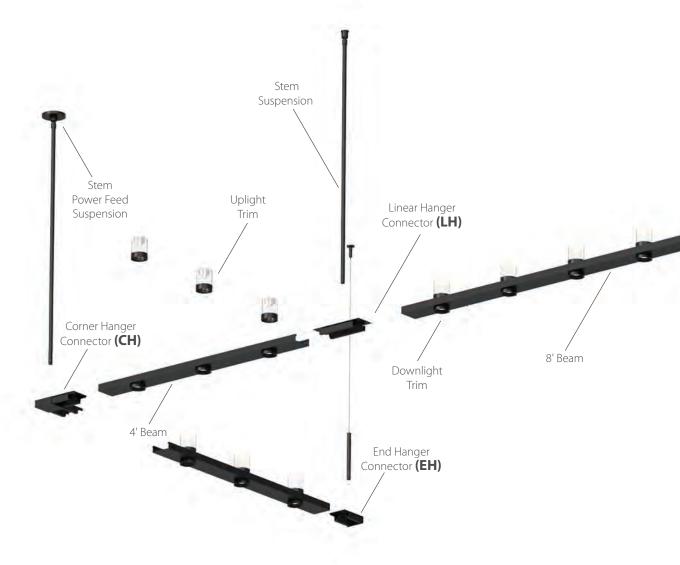

An Intervals system is composed of Linear Beams and multiple Connectors. Any combination of 4' and 8' Beam lengths can be used with any of five Hanger Connector options to create linear, rectangular, perpendicular, and grid configurations that define the volume and utility of a space. For details on how to order Intervals, see p.54-55. For custom configurations, contact our Contract Sales Team at contract@sonneman.com.

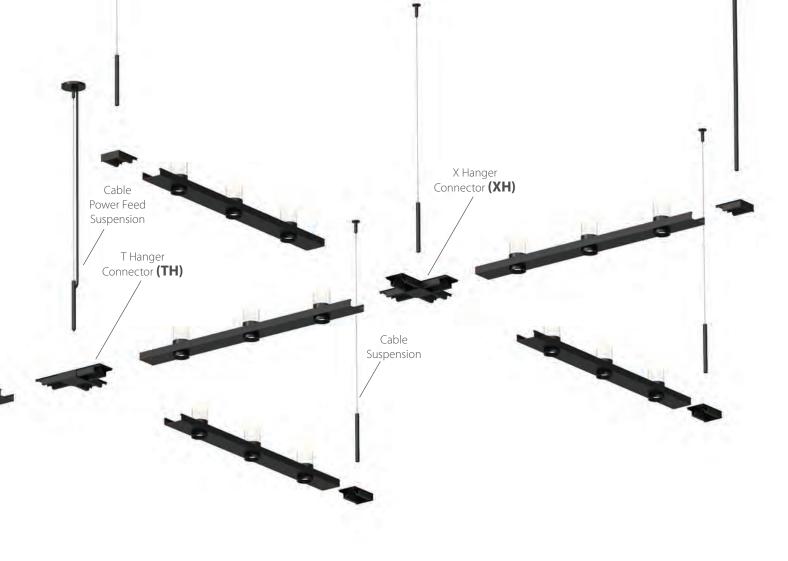

<u>INTERVALS FEATURES:</u>

- Architecturally-scaled, extruded aluminum Beams: $4" \le 1 \%$ " H, in 4' and 8' lengths.
- Innovative chip-on-board LED modules, with 16" or 24" spacing and low-profile hybrid optic lenses in four beam spread options.
- Can be configured for independent control of uplight and downlight channels by using two Power Feed locations.
- Two light output options for each channel: Standard output (4W, 500 Lumens per LED) and High output (8W, 1000 Lumens per LED).
- Three Downlight Light Engine options, which can be mixed on a single Beam: Fixed, Round Aimable, and Cylinder Pendant. Each beam can be configured with or without the Uplight Light Engine.


- Exceptional color consistency, with LEDs binned to within a 2-step MacAdam ellipse.
- Highly efficient LED drivers, with 0-10V dimming down to a true 1% and dim-to-off functionality, as well as incandescent and ELV dimming compatibility at 120VAC.
- Cable and stem suspension mounting options; can be field cut and are suitable for sloped ceiling applications.
- Five Connector options: Linear, Corner, T, X, and End Hangers.
- Multiple decorative and functional trim options.

SYSTEMS | SONNEMAN

INTERVALS PRECONFIGURED COLLECTION:

with Clear w/Cone Uplight Trim | Satin Black

with Clear w/Cone Uplight Trim | Satin Black

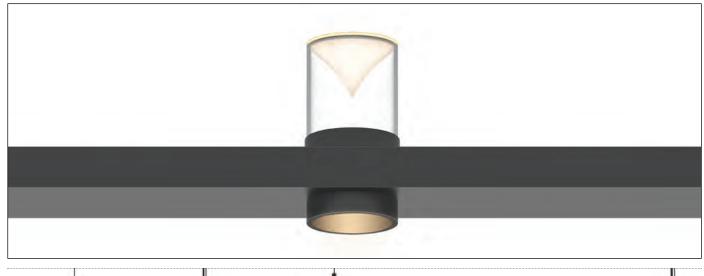






with Clear w/Cone Uplight Trim | Satin Black

with Clear w/Cone Uplight Trim | Satin Black





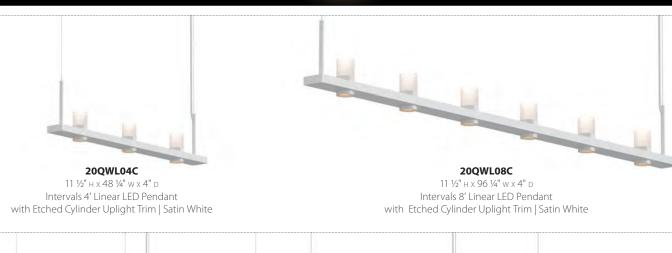



11 ½" н х 56" w х 56" р Intervals 4' Square LED Pendant with Etched Cylinder Uplight Trim | Satin White

11 ½" H x 104" w x 56" D Intervals 4' x 8' Rectangle LED Pendant with Etched Cylinder Uplight Trim | Satin White



How to Order p.54



The Intervals system is available with a wide range of decorative and functional trims and light engines. Each Intervals beam can be specified with any one of the Uplight Trims, and up to five Downlight Trims, allowing Intervals to be configured to meet an infinite range of lighting needs and decorative styles.

INTERVALS UPLIGHT TRIM OPTIONS:





JA



JB

KA

KB

DOWNLIGHT LIGHT ENGINE OPTIONS:




9" CYLINDER PENDANT, WITH FIELD-ADJUSTABLE CORD

FIXED (also available without Uplight)

ROUND AIMABLE, WITH 0-90° TILT AND 360° ROTATION (also available with Uplight)

BEAM SPREAD OPTIONS:

(also available with Uplight)

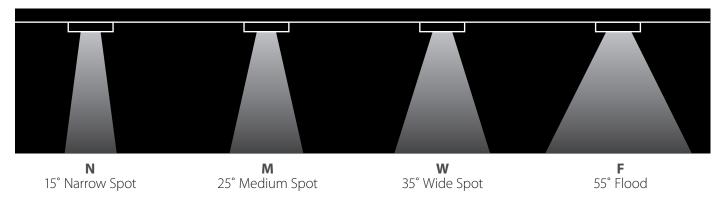


HB

INTERVALS® SPECIFICATIONS: how to order

The Intervals system consists of interconnected Beams, supported by a Connector at each end. Linear, Corner, T, and X Hangers connect multiple Beams to each other. End Hangers close the end of a Beam. For single channel control, only a single Power Feed is required. For independently-controllable uplight and downlight channels, two of the Connectors in the system must be specified as Power Feeds.

INTERVALS BEAM LENGTHS & PITCH OPTIONS

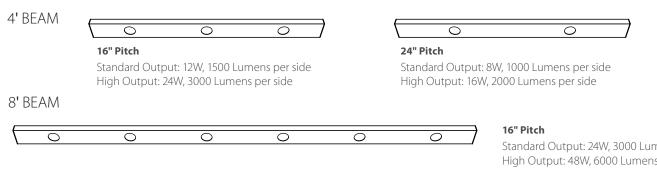


Standard Output: 24W, 3000 Lumens per side High Output: 48W, 6000 Lumens per side



Standard Output: 16W, 2000 Lumens per side High Output: 32W, 4000 Lumens per side


INTERVALS SUSPENSION TYPES




INTERVALS CONNECTOR TYPES

0







X Hanger

PRECONFIGURED OUICK SPEC ORDERING

For simplified ordering, choose from our preconfigured Quick Spec table, where you only need to specify your desired finish, style/size and upper trim; the remaining options have been preselected according to our recommendations.

Family	Category	Finish	Style/Size	Uplight Trim
20 Intervals	Q Quick Spec	K Satin Black	L04 4' Linear	B Clear w/Cone
		W Satin White	L08 8' Linear	C Etched Cylinder
			S04 4' Square	
			R48 4' x 8' Rectangle	
			Z46 4' x 16' Zig Zag	

Example Quick Spec Item Number:

200KL04B

Preconfigured Collection fixtures, p.50 -51

Preselected Options

LED Pitch 16" on Center 120-277V Input Voltage **Uplight Output** Standard Downlight Output High

Phase at 120VAC and 0-10V Dimming 3000K

90 **Downlight Lens** 35° Wide Spot **Suspension Type** 6' Cable

Single Channel Control (One Power Feed)

INTERVALS® SPECIFICATIONS: how to order

Specify your Intervals system by building the item numbers for your Beams and Connectors as shown below, selecting left to right the desired option from each column.

STANDARD ORDERING

Intervals Beams Category Length LED Pitch Uplight **Family** Downlight **Driver Dimming** Input Voltage Output Output **20** Intervals | **P** Suspended Beam K Satin Black 04 4' **16** 16" on center **12** 120V **S** Standard **S** Standard SD Phase and 0-10V 1 22 2200K² **27** 2700K W Satin White 08 8' **24** 24" on center **22** 220V **H** High **H** High **30** 3000K 27 277V N No Uplight **40** 4000K

continued

CRI		Uplight Lens	Uplight Trim		Downlight Type	Downlight Lens	Downlight Trim	Stop here for a single Downlight Type/Trim
	Лin. 80 ³ Лin. 90	N 15° Narrow Spot		KB Etched Cone ⁴		N 15° Narrow Spot		GA Etched Ring 7
90 10	MITI. 50	M 25° Medium Spot	B Clear w/Cone ⁴	LA Wave Top	2 Round	M 25° Medium Spot	C Etched Cylinder ⁵	GB Snoot w/Etched Ring ⁷
		W 35° Wide Spot	C Etched Cylinder 4		Aimable	W 35° Wide Spot	DA Round Snoot ⁵	
		F 55° Flood	FA Square Bezel	LC Pear Glass 4	3 9" Cylinder	F 55° Flood	DB Round Tall	Etched Ring 6,7
		X N/A	FB Clear w/Cube 4	XX No Uplight	Pendant	X N/A	Snoot ^{6,7}	HA Clear Ribbon ⁵
		2.17/1	FC Etched Cube 4			24 1 1 7 7 1	EA Round Wall	HB Etched Ribbon ⁵
							Washer 6,7	JA Bell Reflector 7
			HA Clear Ribbon ⁴				FA Square Bezel 7	JB Ftched Bell 6,7
			HB Etched Ribbon ⁴	•			FD Square Snoot 7	
			JB Etched Bell ⁴				FE Causes Wall	KA Cone Reflector ⁷ KB Etched Cone ^{6,7}

continued (optional)						
Downlight 1 Qty.	Downlight 2 Type	Downlight 2 Lens	Downlight 2 Trim		Downlight 2 Qty.	
1 One	1 Fixed	N 15° Narrow Spot	A Round Bezel	GA Etched Ring ⁷	1 One	
2 Two	2 Round	M 25° Medium Spot	C Etched Cylinder 5	GB Snoot w/Etched Ring ⁷	2 Two	
3 Three	Aimable	W 35° Wide Spot	DA Round Snoot ⁵		3 Three	
4 Four	3 9" Cylinder Pendant	F 55° Flood	DB Round Tall	Etched Ring 6,7	4 Four	
5 Five	rendant	X N/A	Snoot ^{6,7}	HA Clear Ribbon ⁵	5 Five	
			EA Round Wall	HB Etched Ribbon ⁵		
Continue here			Washer 6,7	JA Bell Reflector 7		
to specify a			FA Square Bezel ⁷	JB Etched Bell 6,7		
mix of multiple			FD Square Snoot ⁷	KA Cone Reflector 7		
Downlight Types/Trims on a single Beam			FE Square Wall Washer ^{6,7}	KB Etched Cone ^{6,7}		

Repeat for up to five (5) Downlight Types/Trims, as desired

¹Phase dimming at 120VAC

Example Beam Item Number:

20 P K O 4 1 6 - 1 2 S H S D 3 O 9 O - N B 1 W A 2 2 N A 1 . . . **Mixed Downlight Options Beam Options LED Options Trim Options**

Intervals Connectors

Family	Category	Finish	Connector Type	Suspension Type	Power Feed
20 Intervals	C Connectors	K Satin Black	EH End Hanger	04 4' Stem ⁸	0 No
		W Satin White	LH Linear Hanger	06 6' Cable ⁸	1 Yes
			CH Corner Hanger	20 20' Cable ⁸	
			TH THanger		
			XH X Hanger		

Example Connector Item Number:

20CKEH061

T Hase diffilling at 120 V/C
² Only available in 80 CRI
³ Only available in 2200 CCT
⁴ Lens included, select "X" for Uplight Lens
⁵ Only available for Fixed and Cylinder Pendant Downlight Types. 55° Flood Lens not available for Cylinder Pendant with this Trim.
⁶ Lens included, select "X" for Downlight Lens
Only available for Fixed Downlight Type

45° sloped ceilings


⁸Can be field-cut. Suitable for









AQUARIUS MINOR



Available in three standard sizes – Aquarius Major, Aquarius Medius, and Aquarius Minor – the configurations can be clustered with others and be scaled to any length or

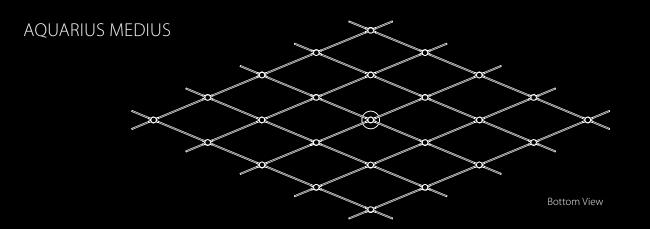

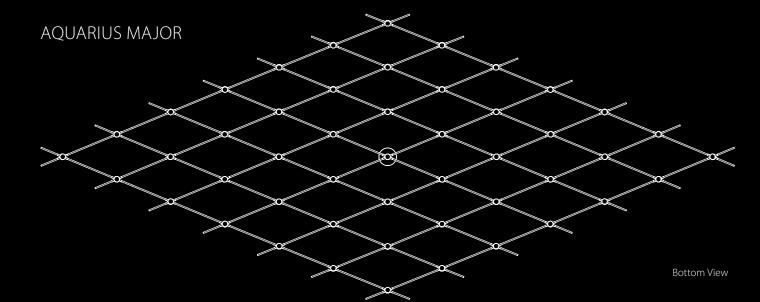

21Q13-Rx3312

Constellation Aquarius Minor

1 ½" H x 66 ¾" W X 28" D Shade: Acrylic 1/2" H X 1 1/2" DIA

Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord/Cable LED: 18W, 2230 Lumens (1560 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

21Q13-RC3312

Satin Nickel 21Q13-RW3312 Satin Nickel

w/Clear Faceted Acrylic w/White Optical Acrylic

21Q13-Rx5512

Constellation Aquarius Medius

1 ½" н x 121 ¾" w x 50 ½" D Shade: Acrylic 1/2" H x 1 1/2" DIA

Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord/Cable LED: 50W, 6190 Lumens (4330 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

Satin Nickel

21Q13-RC5512

21Q13-RW5512

w/Clear Faceted Acrylic Satin Nickel w/White Optical Acrylic

21Q13-Rx7712

Constellation Aquarius Major

1 ½" нх 177" w x 73" р Shade: Acrylic 1/2" H X 1 1/2" DIA

Canopy: 1/2" H x 4 1/2" DIA w/10' Adjustable Cord/Cable LED: 98W, 12120 Lumens (8490 Net Lumens)

Warm White (3000K), 90 CRI 100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

21Q13-RC7712

Satin Nickel w/Clear Faceted Acrylic 21Q13-RW7712 Satin Nickel

SYSTEMS | SONNEMAN

w/White Optical Acrylic





constellation®

live among the stars URSA MINOR

2155

Constellation Ursa Minor


13" н х 55" w х 17 ¼" D Shade: Acrylic 1/2" h x 1 1/2" dia

Canopy: ½" H x 4 ½" DIA W/10' Adjustable Cord LED: (25) 50W (total), 7560 Lumens (4200 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by 0-10V Controls


2155.13C Satin Nickel w/Clear Faceted Acrylic 2155.13W Satin Nickel w/White Optical Acrylic

Refer to website or contact us for additional power supply options and updated information

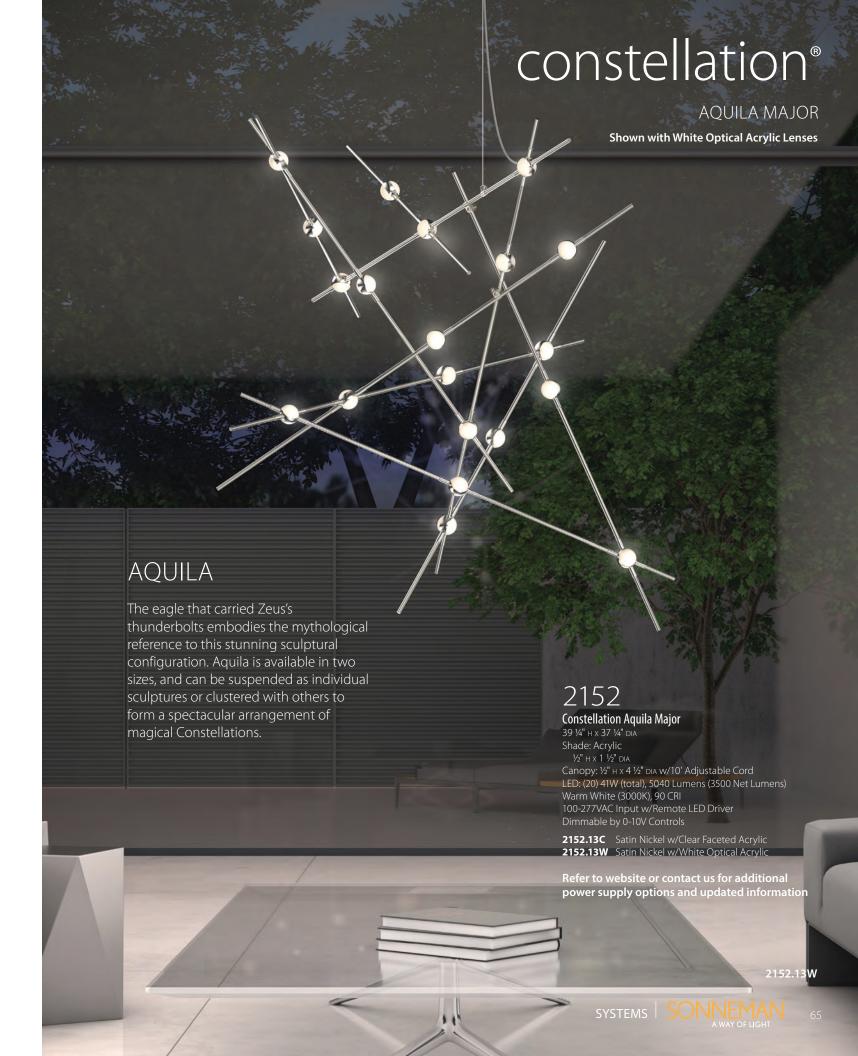






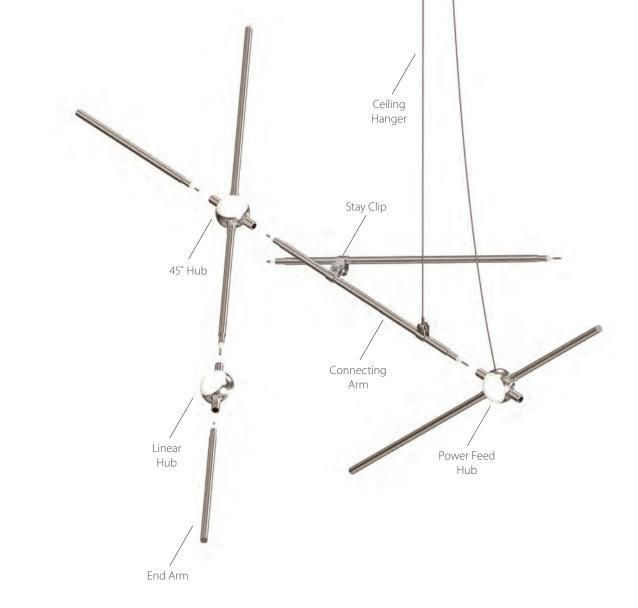




Clear Faceted Acrylic Lens



White Optical Acrylic Lens

CONSTELLATION SYSTEM DETAILS

A Constellation configuration is built from LED hubs, connecting arms, and cable ceiling hangers, shown above. Shown left is a close-up of the Constellation hubs and the two available lens options: illumination radiates through either white optical acrylic lenses, or sparkles with refracted light through micro-faceted clear acrylic crystal lenses. Each hub is a complete LED light engine, using an array of LEDs with driver circuitry on each of the two faces of the hub. The connecting arms form a structural and electrical connection between the hubs, and are easily assembled by inserting the arm into the hub and are secured in place by a retaining set screw. The hubs can revolve around the connecting arms to alter the orientation of the illumination and that of the intersecting connecting arms. The configuration is supported by cable ceiling hangers that snap onto an arm and lock into place as needed, and is powered by a special power feed hub connected to the ceiling power feed.

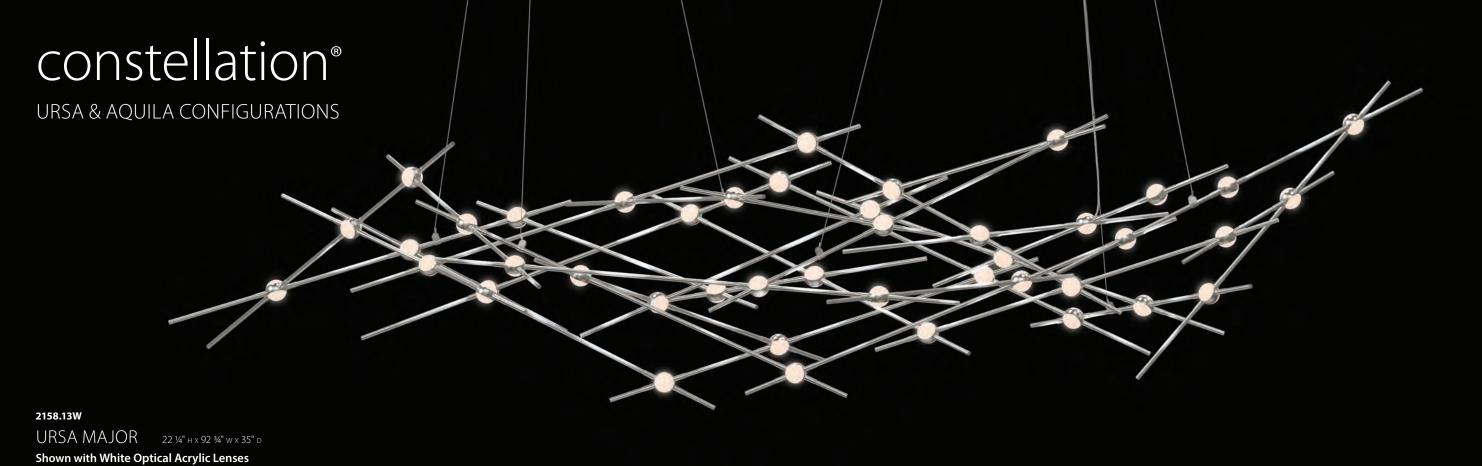

2191.13C

AQUIL A MINOR 200 A STORM AND SHOW AND





votives®

The dramatic repetitive arrangement of the candlelike votives, along with precise points of light beneath, establishes a cadence of light and shadow along a surface, bringing a rhythm of calm, warmth, and introspection.

Glass Types

FD Flat Diffuser Lens

SW Clear Etched Glass

LW Large Clear Etched Glass

SC Laser-Etched Crystal

LC Large Laser-Etched Crystal

2855

Votives 8' LED Wall Bar 2 1/4"-6 1/2" MAX H X 96" W

Extension: 4" Wall Plate: 2" H x 96" w

LED: (16) 40W (total), 3780 Lumens (2950 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

ADA

2855.03- Satin White

Glass type selection, p.78-79





76 Multiple U.S. and foreign patents pending.


votives®

Votives wall bars are shown here with the available laser-etched clear crystal votive.

LW Large Clear Etched Glass


SC Laser-Etched Crystal

LC Large Laser-Etched Crystal

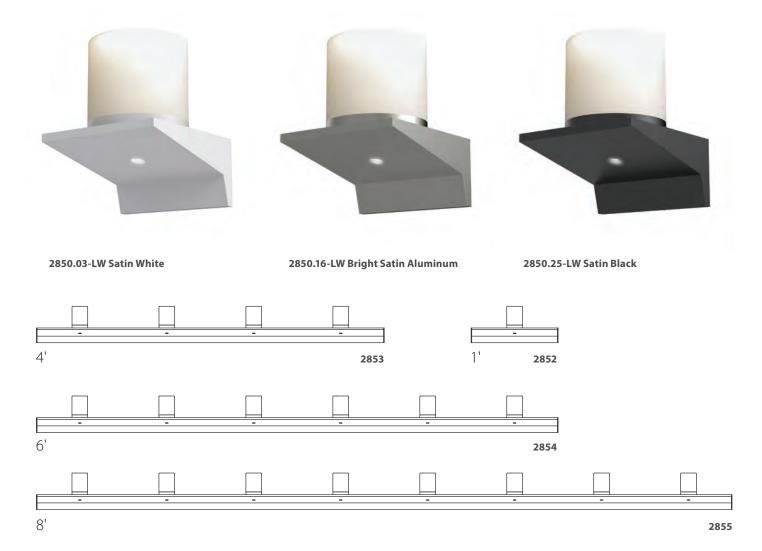

VOTIVES SELECTION





Glass Types

FD Flat Diffuser Lens **sw** Clear Etched Glass

LW Large Clear Etched Glass

SC Laser-Etched Crystal

LC Large Laser-Etched Crystal

2850

Votives LED Sconce 2 1/4"-6 1/2" MAX H X 4" W

Extension: 4" Wall Plate: 2" H x 4" w LED: (2) 6W (total), 470 Lumens (420 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2850.03- Satin White

2850.16- Bright Satin Aluminum

2850.25- Satin Black

2852

Votives 1' LED Wall Bar

2 1/4"-6 1/2" MAX H X 12" W Extension: 4" Wall Plate: 2" H x 12" w LED: (2) 6W (total), 470 Lumens (420 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2852.03- Satin White

2852.16- Bright Satin Aluminum

2852.25- Satin Black







Shade Dimensions

FD 1/4" H X 2 1/4" DIA

SW 3" H X 2 1/4" DIA **LW** 3" H X 3" DIA

SC 4" H X 2" DIA

LC 4 ½" H X 2 ¾" DIA





votives®

2853

Votives 4' LED Wall Bar

2 1/4"-6 1/2" MAX H X 48" W Extension: 4" Wall Plate: 2" H x 48" w LED: (8) 20W (total), 1890 Lumens (1470 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2853.03- Satin White **2853.16-** Bright Satin Aluminum

2853.25- Satin Black

2854

Votives 6' LED Wall Bar

2 1/4"-6 1/2" MAX H X 72" W Extension: 4" Wall Plate: 2" H x 72" w LED: (12) 30W (total), 2830 Lumens (2210 Net Lumens) LED: (16) 40W (total), 3780 Lumens (2950 Net Lumens) Warm White (3000K), 90 CRI 120-277VAC Input w/Remote LED Driver

Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

ADA

2854.03- Satin White 2854.16- Bright Satin Aluminum

2854.25- Satin Black

2855

Votives 8' LED Wall Bar

2 1/4"-6 1/2" MAX H X 96" W Extension: 4"

Wall Plate: 2" H x 96" w

Warm White (3000K), 90 CRI

120-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

ADA


2855.03- Satin White

2855.16- Bright Satin Aluminum

2855.25- Satin Black

SYSTEMS | SONNEMAN



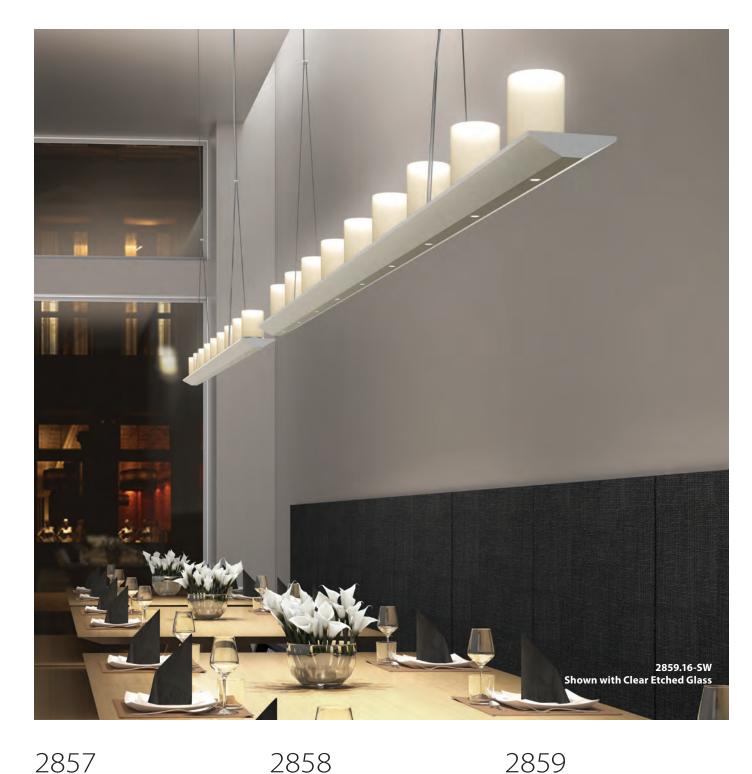

2857

Votives 3' LED Bar Pendant

1"- 5 ¼" мах н х 32" w х 3 ¼" d

Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cable LED: (8) 20W (total), 1890 Lumens (1470 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2857.03- Satin White

2857.16- Bright Satin Aluminum

2857.25- Satin Black

Votives 4' LED Bar Pendant

1"- 5 ¼" MAX H X 48" W X 3 ¼" D

Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cable LED: (12) 30W (total), 2830 Lumens (2210 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2858.03- Satin White

2858.25- Satin Black

2858.16- Bright Satin Aluminum

Special Order: 3" Mini Canopy available. See price list for details.

Glass type selection, p.78-79

2859

Votives 6' LED Bar Pendant

1"- 5 ¼" мах н х 72" w х 3 ¼" d


Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cable LED: (18) 44W (total), 4250 Lumens (3320 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2859.03- Satin White

2859.16- Bright Satin Aluminum

2859.25- Satin Black

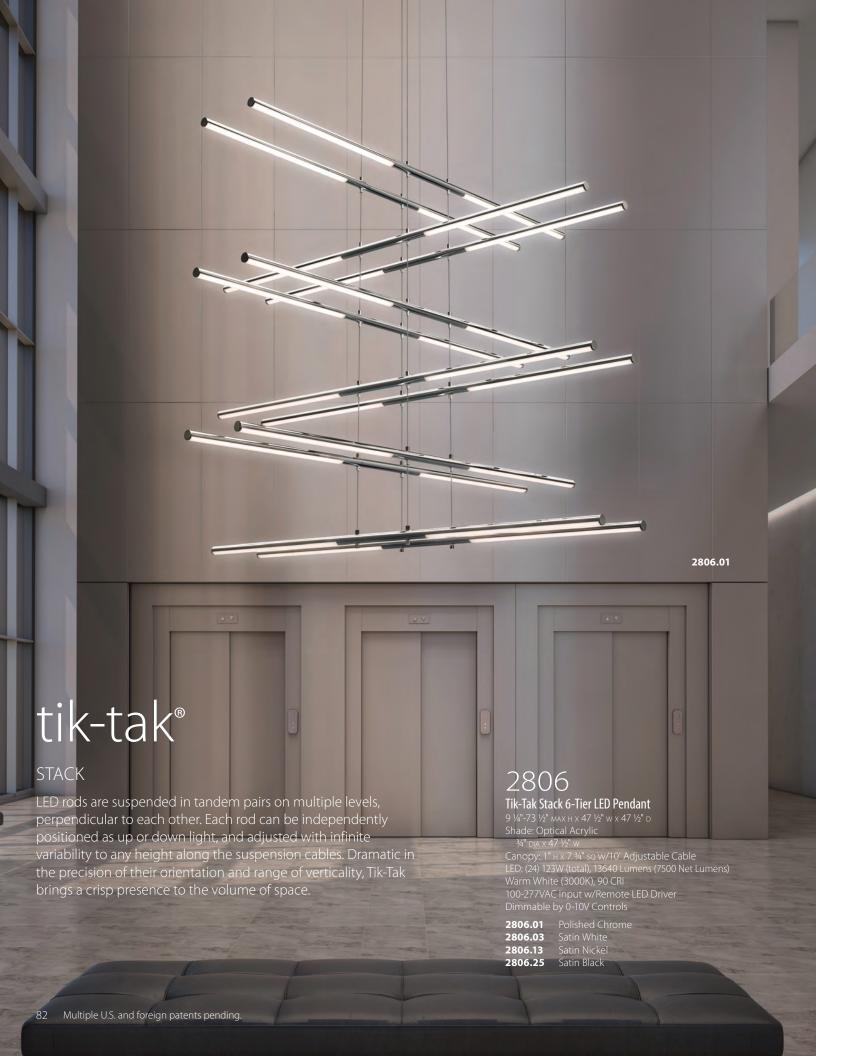



2803

Tik-Tak Stack 3-Tier LED Pendant

5 ½"-73 ½" MAX H X 47 ½" W X 47 ½" D Shade: Optical Acrylic ¾" DIA X 47 ½" W

Canopy: 1" H x 7 3/4" sq w/10' Adjustable Cable LED: (12) 61W (total), 6820 Lumens (3750 Net Lumens)

Warm White (3000K), 90 CRI 100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

 2803.01
 Polished Chrome

 2803.03
 Satin White

 2803.13
 Satin Nickel


 2803.25
 Satin Black



Each rod can be configured in uplight or downlight position

2801.13



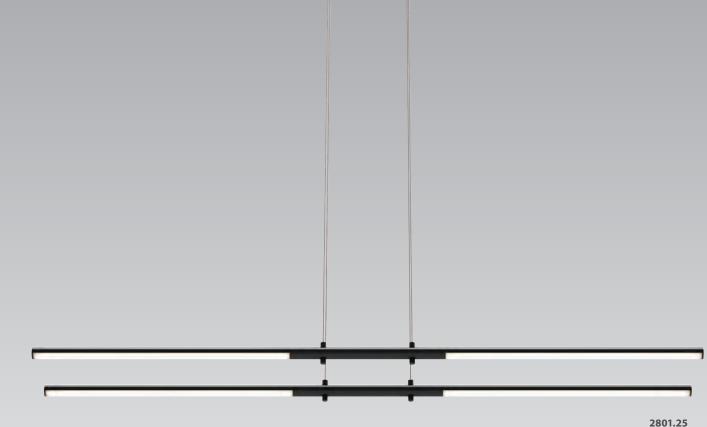

tik-tak®

TANDEM

2802

Tik-Tak Stack 2-Tier LED Pendant

4 ¼"-73 ½" MAX H X 47 ½" W X 47 ½" D Shade: Optical Acrylic

3⁄4" dia x 47 ½" w

Canopy: 1" H x 7 3/4" so w/10' Adjustable Cable LED: (8) 41W (total), 4550 Lumens

(2500 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

 2802.01
 Polished Chrome

 2802.03
 Satin White

 2802.13
 Satin Nickel

 2802.25
 Satin Black

2804

Tik-Tak Stack 4-Tier LED Pendant

6 3/4"-73 1/2" MAX H X 47 1/2" W X 47 1/2" D Shade: Optical Acrylic

3/4" dia x 47 1/2" w

Canopy: 1" H x 7 3/4" sq w/10' Adjustable Cable LED: (16) 82W (total), 9100 Lumens

(5000 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and

Standard (TRIAC) Incandescent at 120VAC, or 0-10V

 2804.01
 Polished Chrome

 2804.03
 Satin White

 2804.13
 Satin Nickel

 2804.25
 Satin Black

2805

Tik-Tak Stack 5-Tier LED Pendant

8"-73 ½" MAX H X 47 ½" W X 47 ½" D Shade: Optical Acrylic

34" dia x 47 ½" w


Canopy: 1" H x 7 ¾" sq w/10' Adjustable Cable LED: (20) 102W (total), 11370 Lumens

(6250 Net Lumens)

Warm White (3000K), 90 CRI 100-277VAC Input w/Remote LED Driver Dimmable by 0-10V Controls

2805.01 Polished Chrome **2805.03** Satin White **2805.13** Satin Nickel

2805.25 Satin Black

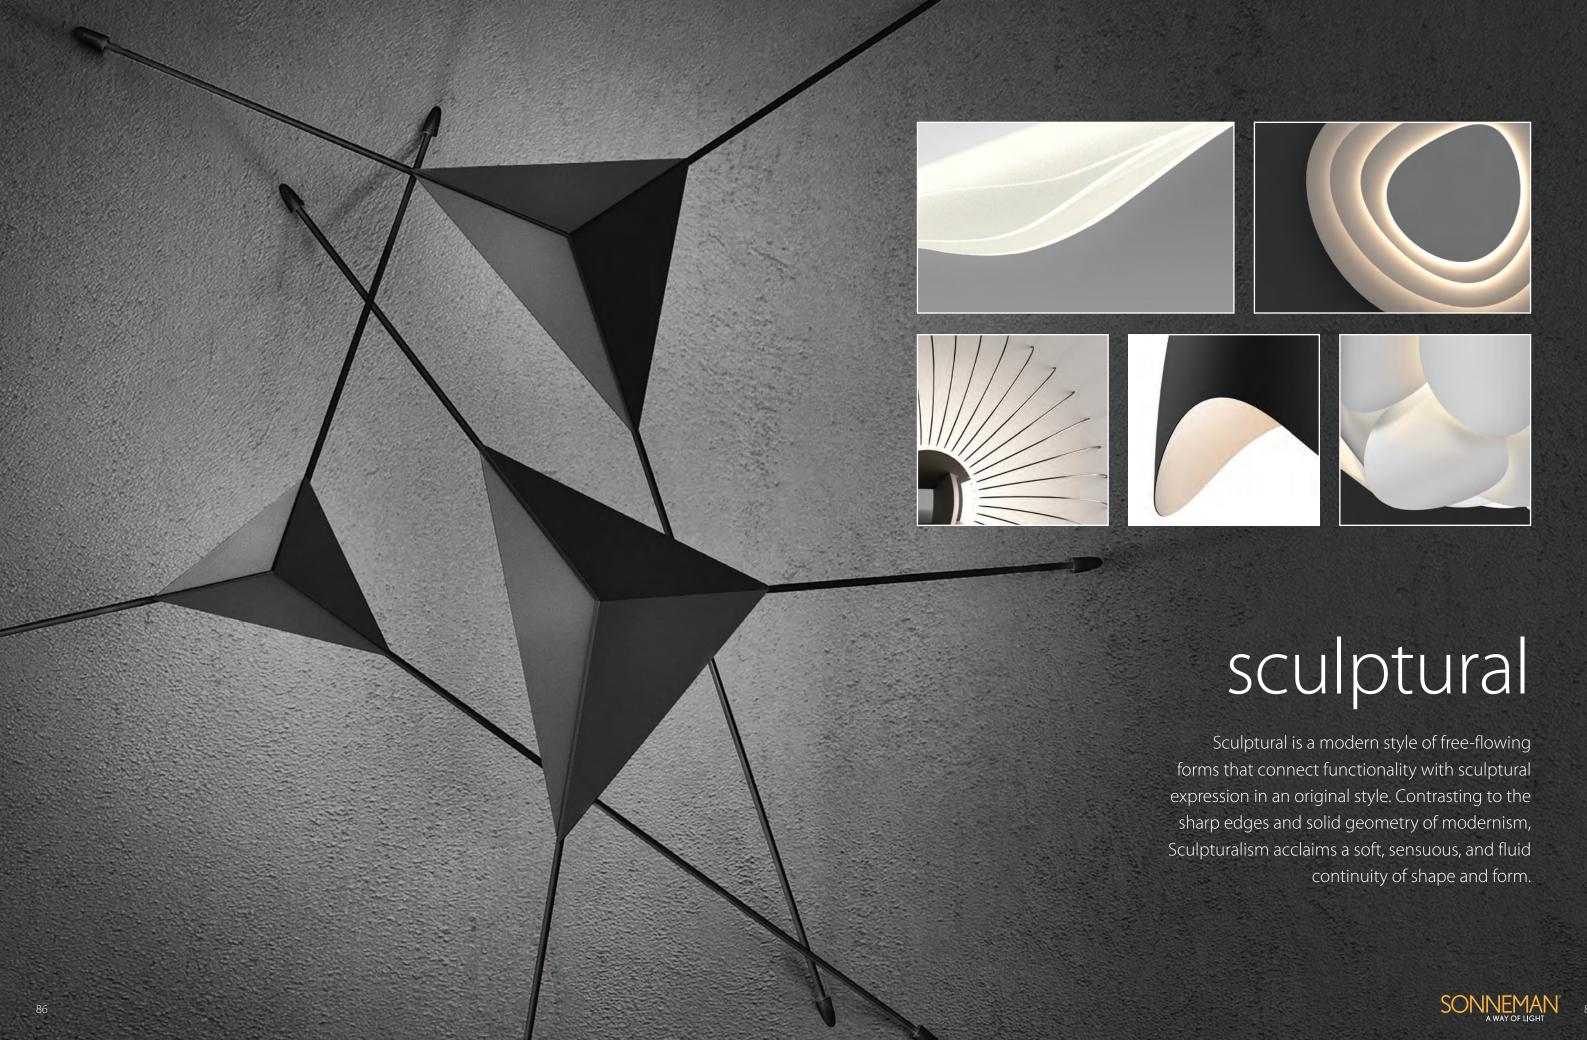





2675.25W 2676.25A

waveforms®

A luminous interior surface peeks through a rhythm of undulations, revealing the light from within these dramatic LED pendants. Shaped in a deep bell or as a broader dome, these sculptural forms are available in several sizes and finishes.

2675

Waveforms Small Bell LED Pendant

15" H X 14" DIA
Shade: Aluminum
Canopy: ½" H X 4 ½" DIA W/6' Adjustable Cord
LED: 11W, 1000 Lumens (205 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2675.03ASatin White w/Apricot Interior2675.03WSatin White w/Satin White Interior2675.18WDove Gray w/Satin White Interior2675.25ASatin Black w/Apricot Interior2675.25WSatin Black w/Satin White Interior

2676

Waveforms Large Bell LED Pendant

25" H x 23 ¼" DIA
Shade: Aluminum
Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord
LED: 21W, 1900 Lumens (1015 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2676.03ASatin White w/Apricot Interior2676.03WSatin White w/Satin White Interior2676.18WDove Gray w/Satin White Interior2676.25ASatin Black w/Apricot Interior2676.25WSatin Black w/Satin White Interior



waveforms®

2674

Waveforms Large Dome LED Pendant

14 ¼" н x 34 ½" DIA Shade: Aluminum

Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cords LED: 21W, 1900 Lumens (1235 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2674.03A Satin White w/Apricot Interior **2674.03W** Satin White w/Satin White Interior **2674.18W** Dove Gray w/Satin White Interior **2674.25A** Satin Black w/Apricot Interior **2674.25W** Satin Black w/Satin White Interior

2673

Waveforms Small Dome LED Pendant

8 1/2" H x 22 1/2" DIA Shade: Aluminum

Canopy: ½" H X 4 ½" DIA W/6' Adjustable Cord LED: 11W, 1000 Lumens (635 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box


Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent


2673.03A Satin White w/Apricot Interior **2673.03W** Satin White w/Satin White Interior **2673.18W** Dove Gray w/Satin White Interior **2673.25A** Satin Black w/Apricot Interior **2673.25W** Satin Black w/Satin White Interior



2673.25W



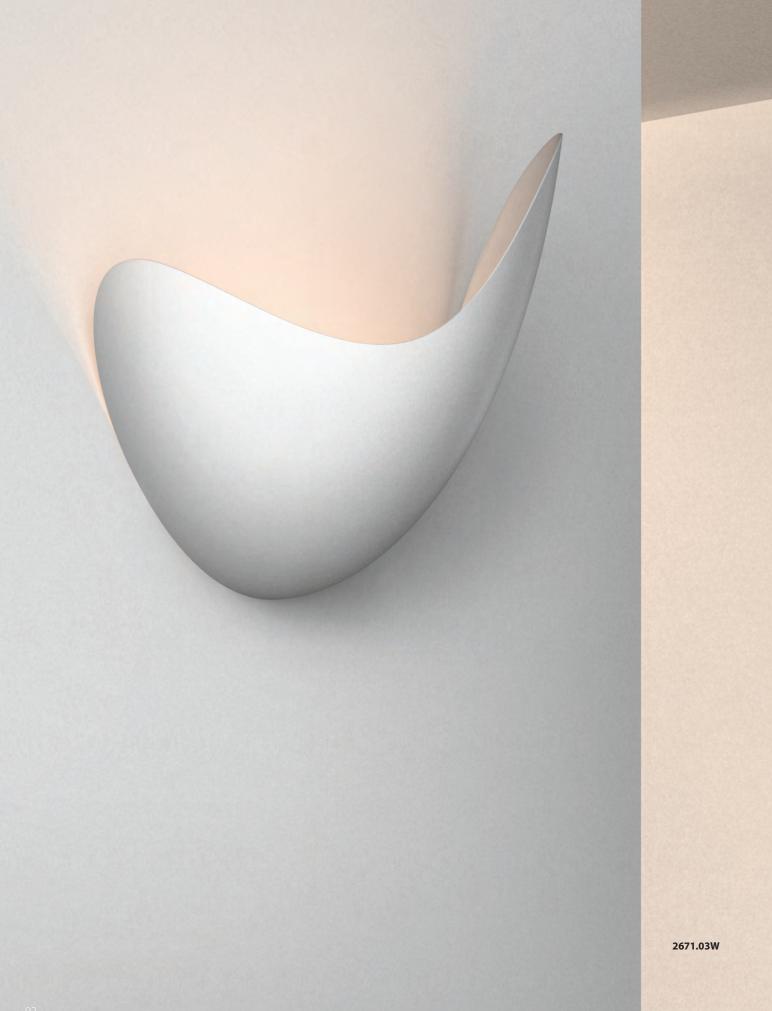

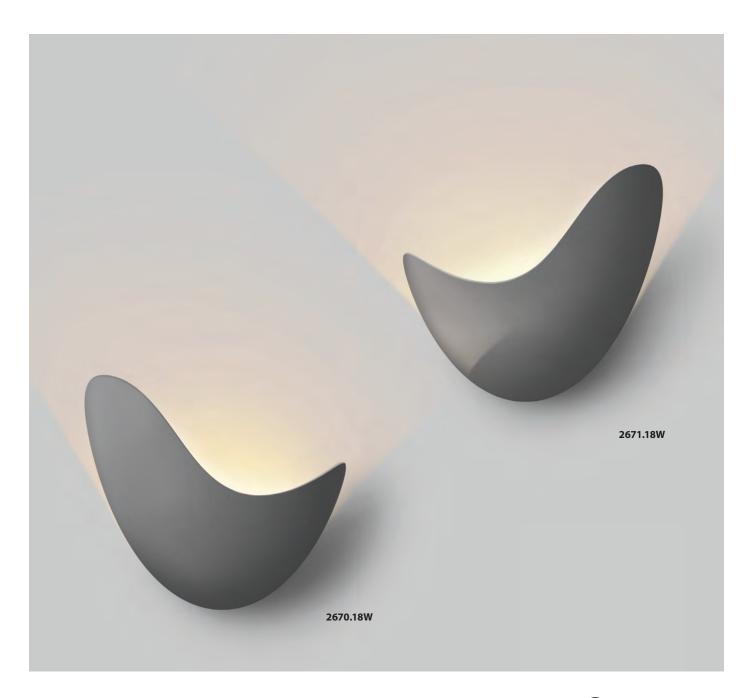

waveforms[®]

2670

Waveforms Left LED Sconce 10" H × 11 ½" W

Shade: Aluminum Extension: 5 1/2"

Wall Plate: 4 ¾" H x 8 ¼" w Bulb: (1) 9W, GU24 Base LED Bulb (included) 850 Lumens, Warm White (3000K), 80 CRI

120VAC Input Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2670.03W Satin White w/Satin White Interior **2670.18W** Dove Gray w/Satin White Interior **2670.25W** Satin Black w/Satin White Interior

2671

Waveforms Right LED Sconce Shade: Aluminum Extension: 5 1/2" Wall Plate: 4 ¾" H x 8 ¼" W Bulb: (1) 9W, GU24 Base LED Bulb (included) 850 Lumens, Warm White (3000K), 80 CRI 120VAC Input

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2671.03W Satin White w/Satin White Interior **2671.18W** Dove Gray w/Satin White Interior **2671.25W** Satin Black w/Satin White Interior





2732.98

little cloud®

2732

Little Cloud LED Downlight Pendant 1" H x 7 ¾" DIA Shade: Die-Cast Aluminum w/Optical Acrylic Diffuser Canopy: 5" DIA w/6' Adjustable Cord LED: 14W, 1350 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2732.98 Textured White

Cloud is a cumulus form that projects intense LED illumination from each of its individual lobes. Little Cloud's three luminous LED sources deliver bright illumination. In collaboration with Peter Polick.





2669

Infinity Reflections Wide LED Pendant

11 ¾" H x 48" w x 21 ½" D Shade: Solid Surface Housing and Reflector Canopy: 1 ¾" H x 18 ¼" w x 6 ¾" D w/6'

Adjustable Cords LED: 39W, 3875 Lumens (2910 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2669.03 Satin White **2669.18** Dove Gray

2668

Infinity Reflections LED Pendant

with Downlight

10" H x 27 ¾" DIA
Shade: Die-Cast Aluminum
w/ Solid Surface Reflector
Canopy: 1 ¾" H x 7 ½" DIA
w/6' Adjustable Cords
LED: 21W, 1975 Lumens (total), 455 Lumens
Down (1105 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2668.03 Satin White **2668.18** Dove Gray

2667

Infinity Reflections LED Pendant

10" H x 27 ¾" DIA Shade: Die-Cast Aluminum w/ Solid Surface Reflector Canopy: 1 ¾" H x 7 ½" DIA w/6' Adjustable Cords LED: 21W, 2230 Lumens (1850 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2667.03 Satin White **2667.18** Dove Gray







infinity

2666

Infinity LED Pendant with Downlight 2" H \times 9" DIA

Shade: Die-Cast Aluminum

Canopy: 1 1/4" H x 6 3/4" DIA W/6' Adjustable Cords LED: 21W, 1975 Lumens (total), 455 Lumens Down (1105 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent **2666.03** Satin White

2666.18 Dove Gray

2665

Infinity LED Pendant 2" H X 9" DIA

Shade: Die-Cast Aluminum Canopy: 1 ¼" н x 6 ¾" DIA w/6' Adjustable Cords LED: 21W, 2230 Lumens (1850 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2665.03 Satin White **2665.18** Dove Gray

A flowing infinity curve sweeps the edge of this sensually sculptured, multipurpose die-cast LED luminaire. Reflecting its luminous radiance off surfaces above, Infinity is also available with a directional LED downlight.





infinity

2662

Infinity LED Wall Torchiere with Downlight 2" H × 8 ½" W Shade: Die-Cast Aluminum 2" H X 9" DIA Extension: 9 1/2" Wall Plate: 5" DIA

LED: 21W, 1975 Lumens (total), 455 Lumens Down (1105 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2662.03 Satin White **2662.18** Dove Gray

2660

Infinity LED Wall Torchiere 2" H x 8 1/2" W Shade: Die-Cast Aluminum 2" H X 9" DIA Extension: 9 ½" Wall Plate: 5" DIA LED: 21W, 2230 Lumens (1850 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2660.03 Satin White **2660.18** Dove Gray





abstract rhythms

2696

Abstract Rhythms Wide LED Pendant 9 ½" $_{\text{H}}\times$ 32" $_{\text{W}}\times$ 7" $_{\text{D}}$

Shade: Metal w/Optical Acrylic Diffuser Canopy: 1 1/4" H x 15" W x 6" D W/6' Adjustable Cables LED: 30W, 2590 Lumens (1260 Net Lumens) Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2696.98 Textured White

2695

Abstract Rhythms LED Pendant 8 ¼" H x 25 ½" DIA

Shade: Metal w/Optical Acrylic Diffuser Canopy: 1 ½" H x 7" DIA w/6' Adjustable Cables LED: 27W, 2375 Lumens (1500 Net Lumens) Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2695.98 Textured White

Flowing abstract shapes, layered in progression, form both linear and three-sided curved volumes of luminous reflections. LED light radiates from the center outward, through voids in the layers from a perfectly fit luminaire within the center.





abstract rhythms

2697

Abstract Rhythms Tall LED Pendant 21 ½" H x 12 ½" DIA

Shade: Metal w/Optical Acrylic Diffuser Canopy: 1 1/4" H x 6" DIA W/6' Adjustable Cables LED: 30W, 2590 Lumens (1050 Net Lumens) Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only),

2697.98 Textured White





2690

Abstract Panels Small 2-Plate LED Sconce

Shade: Metal Extension: 2" Wall Plate: 6 ¾" DIA LED: 14W, 780 Lumens (300 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2690.98 Textured White

2692

Abstract Panels Large 2-Plate LED Sconce

Shade: Metal Extension: 2" Wall Plate: 6 ¾" DIA LED: 14W, 780 Lumens (300 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2692.98 Textured White

2694

Abstract Panels 4-Plate LED Sconce

Shade: Metal Extension: 3 ¾" Wall Plate: 6 ¾" DIA LED: 14W, 780 Lumens (300 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2694.98 Textured White



2643.03

2643

Lotus Pendant 10 1/4" H x 19 3/4" DIA

Shade: Metal w/Optical Acrylic Diffuser Canopy: ½" H x 5" DIA Stem Kit: (3) 12" + (1) 6" Bulb: (2) 60W Medium Base

2643.03 Satin White

2645

Lotus Large Pendant 13 ½" H x 25 ½" DIA Shade: Metal w/Optical Acrylic Diffuser Canopy: ½" H X 5" DIA Stem Kit: (3) 12" + (1) 6" Bulb: (3) 60W Medium Base

2645.03 Satin White

2640

Lotus LED Sconce Shade: Metal Extension: 6 ½"
Wall Plate: 6" DIA
Bulb: (1) 9W, GU24 Base LED Bulb (included)
850 Lumens, Warm White (3000K), 80 CRI 120VAC Input Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2640.03 Satin White

lotus

A SYMBOL OF ENLIGHTENMENT

White, curved forms, arrayed in suspension, direct bright light up, down, and through the spaces between its lotus-like petals, producing soft luminous reflections and a radiant glow.





2583

Gestures 3-Arm LED Pendant

27" н x 39 ½" dia Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 6" DIA Stem Kit: (3) 12" + (1) 6" LED: 75W, 4000 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2583.01 Polished Chrome 2583.25 Satin Black

gestures

Sweeping gestures from the featherlight hand of an artist's brush define this dramatic expression of luminous art. LED illumination radiates from the top and bottom faces of each sweeping arc to cast direct and indirect light within a space.

2583.01



wave bar®

Undulating waves of translucent acrylic profiles flow in a complex rising and falling of alternating layers. Illuminated from an extruded LED light bar, light passes through to outline the edges, and is refracted by the frosted surfaces of the wave-like forms. Available in two lengths, Wave Bars can be clustered or arranged in linear or offset patterns over a surface or along a space of infinite length.

2820

Wave Bar 36" LED Pendant

7" H x 34 ¾" w x ¾" D
Shade: Frosted Acrylic
1 ¾" H x 36 ½" w x ¾" D
Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord
LED: 17W, 1700 Lumens (1110 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or
Standard (TRIAC) Incandescent

2820.03 Satin White

2822

Wave Bar 48" LED Pendant 7 ½" H X 46 ¼" W X ¾" D

Shade: Frosted Acrylic
1 ¾" H x 48" W x ¾" D
Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cord
LED: 22W, 2130 Lumens (1480 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2822.03 Satin White

Special Order: 3" Mini Canopy available. See price list for details.

SCULPTURAL | SONNEMAN A WAY OF LIGHT





Curved along its length in a subtly tapered arc and flared from top to bottom, the complexity of this Zen-like shape is hidden in its simplicity, but becomes apparent in the functionality with which it renders LED light onto a surface.

1742

Kabu Large LED Pendant

4 1/4" H x 29" W x 3" D

Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 4 1/2" sq w/6' Adjustable Cord
LED: 20W, 1730 Lumens
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

1742.16 Bright Satin Aluminum



corso linear

Corso Linear is a softly contoured undulation of linear illumination.

1733

Corso Linear 24" LED Pendant

2 ¼" H x 24" w x 3 ¼" D Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 13" x 2 ½" w/6' Adjustable Cable LED: 24W, 1400 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

Optional 4 1/2" DIA canopy plate included

1733.16 Bright Satin Aluminum

1734

Corso Linear 34" LED Pendant 2 %" $\bowtie x 34 \%$ " $\bowtie x 3 \%$ " $\bowtie x 3 \%$

Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 13" x 2 ½" w/6' Adjustable Cable LED: 36W, 2100 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

Optional 4 ½" DIA canopy plate included

1734.16 Bright Satin Aluminum1734.98 Textured White

1735

Corso Linear 44" LED Pendant

2 ¼" H x 44 ¾" w x 3 ¼" D
Shade: Aluminum w/Optical Acrylic Diffuser
Canopy: 13" x 2 ½" w/6' Adjustable Cable
LED: 48W, 2800 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/12VAC
Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

Optional 4 1⁄2" DIA canopy plate included

1735.16 Bright Satin Aluminum **1735.98** Textured White



2632.01

fontanna

A radial arrangement of whisper-like wires, like the arching streams of a fountain, catch the light from a semispherical reflector over an LED core, casting a dramatic array of hairline shadows on a surface.

2632

Fontanna LED Sconce

20 1/2" DIA Shade: Metal 4 3/4" DIA Extension: 4" Wall Plate: 4 ¾" DIA

LED: 13W, 1395 Lumens (410 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2632.01 Polished Chrome **2632.03** Satin White Satin Nickel 2632.13





Chroma Small Sconce
16 ¼" н x 9 ¾" w
Shade: Dichroic Glass
1 ¾" н x 9 ¾" w x 2 ¾" D
Extension: 2"



chroma Chroma excites and delights as light is projected through and

reflected by two angled panes of dichroic glass in alternating colors, and transforms surfaces into an extraordinary chromatic display while illuminating its surroundings.



leaf

Reminiscent of a freshly-grown stem with two leaves, Leaf offers a bold yet organic feel to a space. Soft LED illumination is reflected onto the wall from leaf-like shades, producing a warm radiant glow.



2351

Leaf LED Sconce 13 ¼" н x 9 ½" w

Shade: Aluminum 6 3/4 H X 2 1/4" W X 1" D Extension: 7" Wall Plate: 4 ½" H x 2 ½" w x ½" D LED: (2) 4W (total), 440 Lumens (280 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), or Standard (TRIAC) Incandescent at 120VAC.

2351.03 Satin White 2351.25 Satin Black



2351.25







2356.03 Satin White **2356.25** Satin Black

2356.25



prism-shaped reflector that hovers over the surface on thin rods
extended in tension from each of the three triangular corners.


Reflectors are available in three sizes and can be arranged into a unique, abstract surface sculpture of illumination, with multiple
fixtures connected to a single remote power supply.

2181.03-L
2181.03-L
2181.03-M
Satin White w/Large Reflector
Satin White w/Small Reflector
2181.25-L
2181.25-S Satin Black w/Large Reflector
2181.25-S Satin Black w/Medium Reflector
2181.25-S Satin Black w/Small Reflector





abstract™ (Custom configuration shown) Multiple U.S. and foreign patents pending.

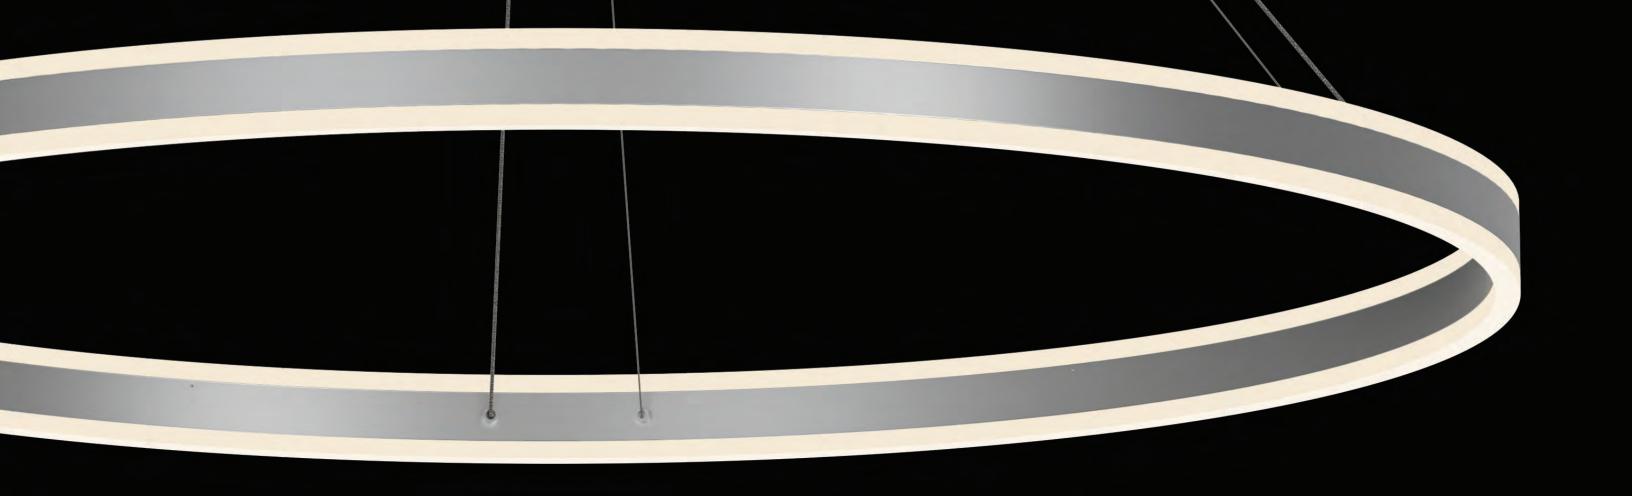



architectural

Architectural is a modern style that refers to the application of generally minimal, functional, geometric designs as expressions of modern architectural applications.





2311

Corona 6" LED Ring Pendant

Shade: Frosted Acrylic Canopy: 1 ½" H x 5" DIA W/6' Adjustable Cable LED: 8W, 580 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2311.16 Bright Satin Aluminum

2311.25 Satin Black

2313

Corona 16" LED Ring Pendant

Shade: Frosted Acrylic Canopy: 1 ¾" H x 5" DIA w/6' Adjustable Cable LED: 19W, 1350 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2313.16 Bright Satin Aluminum

2313.25 Satin Black

2315

Corona 24" LED Ring Pendant

2" h x 23 ¾" dia Shade: Frosted Acrylic Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 28W, 2050 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or

2315.16 Bright Satin Aluminum 2315.25 Satin Black

2317

Corona 32" LED Ring Pendant

2" H x 31 ½" DIA Shade: Frosted Acrylic Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 35W, 2560 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and

Standard (TRIAC) Incandescent at 120VAC, or

2317.16 Bright Satin Aluminum 2317.25 Satin Black

2318

Corona 48" LED Ring Pendant

2 ½" н x 48" dia Shade: Frosted Acrylic Canopy: 1 ½" H x 8" DIA W/6' Adjustable Cable LED: 45W, 4300 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or

2318.16 Bright Satin Aluminum **2318.25** Satin Black







double corona®

2303

Double Corona 24" LED Ring Pendant

2 ¾" H X 23 ¾" DIA Shade: Frosted Acrylic ½" H X 23 ¾" DIA

Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: (2) 51W (total), 3170 Lumens (2540 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/(2) LED Drivers in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2303.16 Bright Satin Aluminum2303.25 Satin Black

2305

Double Corona 32" LED Ring Pendant

2 ¾" H x 31 ½" DIA Shade: Frosted Acrylic ½" H x 31 ½" DIA

Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: (2) 62W (total), 3720 Lumens (3110 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/ (2) LED Drivers in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2305.16 Bright Satin Aluminum2305.25 Satin Black

2307

Double Corona 48" LED Ring Pendant

2 3/4" H X 47 1/4" DIA Shade: Frosted Acrylic

½" н x 47 ¼" dia

Canopy: 1 ¾" H x 8" DIA W/6' Adjustable Cable LED: (2) 102W (total), 6210 Lumens (5080 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/ (2) LED Drivers in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V


2307.16 Bright Satin Aluminum2307.25 Satin Black





Luminous bars form a symmetrical fractal pattern of intersecting Y shapes. Delicate and precise, this snowflakelike geometry casts its LED illumination evenly across a broad surface or area.





2775

Quad-Y LED Pendant

1 ½" H x 46 ½" DIA


Shade: Optical Acrylic
Canopy: 4 ½" so w/6' Adjustable Cord
LED: 115W, 6430 Lumens
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

2775.03 Satin White **2775.25** Satin Black





Linear illumination often ends abruptly, leaving the ends of a surface in dark shadows. Bi-Y distributes its LED illumination radially from the center of each Y intersection, casting illumination broadly along its perfectly balanced minimal profile.



2774

Bi-Y LED Pendant

1 ½" H x 36 ¾" W x 18" D Shade: Optical Acrylic Canopy: 4 ½" sq w/6' Adjustable Cord LED: 54W, 2870 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)


2774.03 Satin White **2774.25** Satin Black



2773

Y LED Pendant 1 ½" H x 32 ½" DIA Shade: Optical Acrylic Canopy: 4 ½" DIA W/6' Adjustable Cord LED: 40W, 2000 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2773.03 Satin White 2773.25 Satin Black



Delicate simplicity from a pure geometric expression provides radially distributed LED illumination in perfect balance around its intersecting center.



2348.03 Satin White

2348.25 Satin Black

2348.16 Bright Satin Aluminum

2345.25 2346 2345 Stiletto 24" LED Pendant 4 1/4" H X 24 1/4" W X 3/4" D

Stiletto 32" LED Pendant 4 1/4" H x 32 1/2" W x 3/4" D

Shade: Frosted Acrylic Canopy: 16" x 4 ¾" w/6' Adjustable Cord LED: 12W, 1050 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2346.03 Satin White 2346.16 Bright Satin Aluminum **2346.25** Satin Black

2347.03 Satin White

2347.25 Satin Black

2347.16 Bright Satin Aluminum

LED: 10W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

Shade: Frosted Acrylic

2345.03 Satin White **2345.16** Bright Satin Aluminum **2345.25** Satin Black

Canopy: 16" x 4 ¾" w/6' Adjustable Cord

2349.03 Satin White **2349.16** Bright Satin Aluminum


2349.25 Satin Black


2349.25

2348.25

2347.25

2346.25

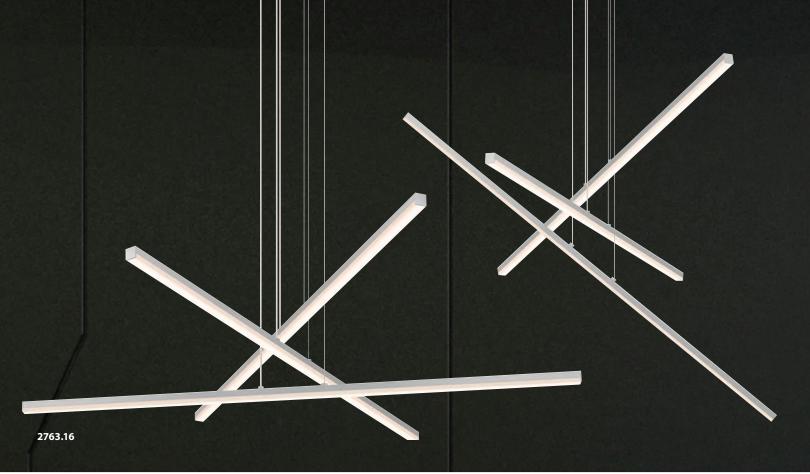

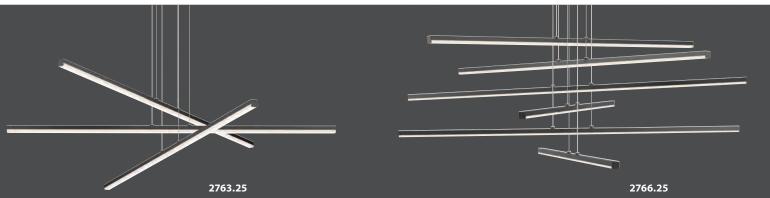

stix

An arrangement of precise LED Stix forms a variety of illuminated mobile sculptures with freedom to arrange the composition and angles of the elements.

2763

Stix 3-Arm LED Pendant 3" H × 40" DIA Shade: Optical Acrylic 34" H X 39 ½" W X 34" D Canopy: 1 ½ " H x 8" DIA, w/6' Adjustable Cable LED (3): 42W total, 4300 Lumens Warm White (3000K), 80 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0–10V

2763.16 Bright Satin Aluminum **2763.25** Satin Black

2766

Stix 6-Arm LED Pendant

6" H × 40" DIA Shade: Optical Acrylic 34" H × 39 ½" W × ¾" D Canopy: 1 ½ " H x 8" DIA, w/6' Adjustable Cable LED (6): 84W total, 8600 Lumens Warm White (3000K), 80 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0–10V

2766.16 Bright Satin Aluminum **2766.25** Satin Black







STIX RECTANGLE



stix rectangle

2788

Stix Rectangle 30" x 6" LED Pendant 1 ½" H \times 30" W \times 7 ½" D

Shade: Optical Acrylic Canopy: 1 3/4" H x 6" sq w/6' Adjustable Cable LED: 25W, 2000 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2788.16 Bright Satin Aluminum **2788.25** Satin Black

2789

Stix Rectangle 47" x 9" LED Pendant

1 ½" н x 47" w x 9 ¼" D Shade: Optical Acrylic Canopy: 1 3/4" H x 6" sq w/6' Adjustable Cable LED: 38W, 3040 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2789.16 Bright Satin Aluminum **2789.25** Satin Black



Full product specifications p.151

2816-6

Thin-Line 6' One-Sided LED Pendant 5" H x 72" W x ¾ D

2816.03-6 Satin White

2816.16-6 Bright Satin Aluminum

2816.25-6 Satin Black

2818-6

Thin-Line 6' Two-Sided LED Pendant 5" H x 72" W x ¾ D

2818.03-6 Satin White

2818.16-6 Bright Satin Aluminum

2818.25-6 Satin Black

2816-8

Thin-Line 8' One-Sided LED Pendant

5" н x 96" w x ¾ D

2816.03-8 Satin White

2816.16-8 Bright Satin Aluminum

2816.25-8 Satin Black

2818-8

Thin-Line 8' Two-Sided LED Pendant

5" H X 96" W X 34 D

2818.03-8 Satin White

2818.16-8 Bright Satin Aluminum

2818.25-8 Satin Black

thin-line®

A system of minimally scaled LED linear pendants and wall bars, Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or uplight, providing direct or indirect illumination.

2816-3

Thin-Line 3' One-Sided LED Pendant 5" нх 36" w х ¾ р

2816.03-3 Satin White **2816.16-3** Bright Satin Aluminum **2816.25-3** Satin Black

2818-3

Thin-Line 3' Two-Sided LED Pendant

2818.03-3 Satin White **2818.16-3** Bright Satin Aluminum **2818.25-3** Satin Black

2816-4

Thin-Line 4' One-Sided LED Pendant 5" н х 48" w х ¾ D

2816.03-4 Satin White

2816.16-4 Bright Satin Aluminum **2816.25-4** Satin Black

2818-4

Thin-Line 4' Two-Sided LED Pendant 5" н х 48" w х ¾ р

2818.03-4 Satin White 2818.16-4 Bright Satin Aluminum

2818.25-4 Satin Black

2818.25-8



thin-line®

Thin-Line wall bars are offered in a variety of lengths and finishes, and in three lighting configurations. One-sided configurations direct light in a single direction, and can be mounted in an uplight or downlight orientation.

Two-sided configurations direct light both up and down. Indirect configurations, shown here, reflect light back onto the wall or mounting surface to radiate indirect illumination.

2814.25-4

2814.25-3

2814.25-6

2814.25-8

Full product specifications p.150





2810-3

Thin-Line 3' One-Sided LED Wall Bar 1" H x 36" W

2810.03-3 Satin White

2810.16-3 Bright Satin Aluminum **2810.25-3** Satin Black

2812-3

Thin-Line 3' Two-Sided LED Wall Bar 1" н x 36" w

2812.03-3 Satin White **2812.16-3** Bright Satin Aluminum **2812.25-3** Satin Black

2814-3

Thin-Line 3' Indirect LED Wall Bar 3/4" H x 36" W

2814.03-3 Satin White

2814.16-3 Bright Satin Aluminum **2814.25-3** Satin Black

2810-4

Thin-Line 4' One-Sided LED Wall Bar

1" H x 48" W

2810.03-4 Satin White **2810.16-4** Bright Satin Aluminum **2810.25-4** Satin Black

2812-4

Thin-Line 4' Two-Sided LED Wall Bar

1" H x 48" W

2812.03-4 Satin White **2812.16-4** Bright Satin Aluminum **2812.25-4** Satin Black

2814-4

Thin-Line 4' Indirect LED Wall Bar 3/4" H X 48" W

2814.03-4 Satin White 2814.16-4 Bright Satin Aluminum **2814.25-4** Satin Black

One-sided light direction Two-sided light direction

Indirect light direction

2810-6

Thin-Line 6' One-Sided LED Wall Bar 1" H x 72" W

2810.03-6 Satin White **2810.16-6** Bright Satin Aluminum **2810.25-6** Satin Black

2812-6

Thin-Line 6' Two-Sided LED Wall Bar 1" H x 72" W

2812.03-6 Satin White **2812.16-6** Bright Satin Aluminum **2812.25-6** Satin Black

2814-6

Thin-Line 6' Indirect LED Wall Bar 34" H x 72" W

2814.03-6 Satin White **2814.16-6** Bright Satin Aluminum **2814.25-6** Satin Black

2810-8

Thin-Line 8' One-Sided LED Wall Bar 1" н x 96" w

2810.03-8 Satin White **2810.16-8** Bright Satin Aluminum

2812-8

2810.25-8 Satin Black

Thin-Line 8' Two-Sided LED Wall Bar 1" н x 96" w

2812.03-8 Satin White 2812.16-8 Bright Satin Aluminum **2812.25-8** Satin Black

2814-8

Thin-Line 8' Indirect LED Wall Bar 34" H x 96" W

2814.03-8 Satin White 2814.16-8 Bright Satin Aluminum 2814.25-8 Satin Black

thin-line®

ONE-SIDED WALL BARS

2810-3

Thin-Line 3' One-Sided LED Wall Bar

Shade: Aluminum w/Optical Acrylic 1" н x 36" w x ¾" D

Extension: 3 1/5" Wall Plate: 1" H x 1" w LED: 11W, 1110 Lumens (670 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2810.03-3 Satin White **2810.16-3** Bright Satin Aluminum **2810.25-3** Satin Black

2810-4

Thin-Line 4' One-Sided LED Wall Bar 1" H x 48" W

Shade: Aluminum w/Optical Acrylic 1" H X 48" W X 34" D Extension: 3 1/5" Wall Plate: 1" H x 1" w LED: 14W, 1450 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LFD Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2810.03-4 Satin White 2810.16-4 Bright Satin Aluminum **2810.25-4** Satin Black

2810-6

Thin-Line 6' One-Sided LED Wall Bar

1" H x 72" W Shade: Aluminum w/Optical Acrylic 1" H x 72" W x ¾" D Extension: 3 1/5" Wall Plate: 1" H x 1" w LED: 21W, 2220 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LFD Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2810.03-6 Satin White **2810.16-6** Bright Satin Aluminum 2810.25-6 Satin Black

2810-8

Thin-Line 8' One-Sided LED Wall Bar

1" H x 96" W Shade: Aluminum w/Optical Acrylic 1" н x 96" w x ¾" D Extension: 3 1/5" Wall Plate: 1" H x 1" w LED: 28W, 3120 Lumens (1800 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/Remote LFD Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2810.03-8 Satin White 2810.16-8 Bright Satin Aluminum **2810.25-8** Satin Black

TWO-SIDED WALL BARS

2812-3

Thin-Line 3' Two-Sided LED Wall Bar

1" H x 36" W Shade: Aluminum w/Optical Acrylic 1" н x 36" w x ¾" D Extension: 3 1/2"

Wall Plate: 1" H x 1" w LED: (2) 21W (total), 2220 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2812.03-3 Satin White

2812.16-3 Bright Satin Aluminum 2812.25-3 Satin Black

2812-4

1" H x 48" W Shade: Aluminum w/Optical Acrylic 1" H X 48" W X 34" D Extension: 3 1/2"

Wall Plate: 1" H x 1" w LED: (2) 28W (total), 2910 Lumens (1800 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2812.03-4 Satin White

2814-4

34" H X 48" W X 1" D

Wall Plate: ¾" H x 1" w

3/4" H x 48" W

Extension: 3 1/2"

2812.16-4 Bright Satin Aluminum **2812.25-4** Satin Black

Thin-Line 4' Indirect LED Wall Bar

Shade: Aluminum w/Optical Acrylic

Thin-Line 4' Two-Sided LED Wall Bar

2812-6

Thin-Line 6' Two-Sided LED Wall Bar

1" H x 72" w Shade: Aluminum w/Optical Acrylic 1" H x 72" W x ¾" D Extension: 3 1/2" Wall Plate: 1" H x 1" w

LED: (2) 41W (total), 4440 Lumens (2700 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent ADA

2812.03-6 Satin White

2812.16-6 Bright Satin Aluminum 2812.25-6 Satin Black

2812-8

Thin-Line 8' Two-Sided LED Wall Bar

1" H x 96" W Shade: Aluminum w/Optical Acrylic 1" H x 96" W x ¾" D Extension: 3 1/2"

Wall Plate: 1" H x 1" w LED: (2) 55W (total), 6240 Lumens (3590 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2812.03-8 Satin White 2812.16-8 Bright Satin Aluminum

2812.25-8 Satin Black

ADA

INDIRECT WALL BARS

2814-3

3/4" H x 36" W

Thin-Line 3' Indirect LED Wall Bar

Shade: Aluminum w/Optical Acrylic 34" H x 36" W x 1" D Extension: 3 1/2" Wall Plate: 3/4" H x 1" w LED: 11W, 1110 Lumens

(670 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2814.03-3 Satin White **2814.16-3** Bright Satin Aluminum **2814.25-3** Satin Black

LED: 14W. 1450 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2814.03-4 Satin White

2814.16-4 Bright Satin Aluminum **2814.25-4** Satin Black

2814-6

Thin-Line 6' Indirect LED Wall Bar

3/4" H x 72" W Shade: Aluminum w/Optical Acrylic 34" H x 72" W x 1" D Extension: 3 1/2" Wall Plate: ¾" H x 1" w LED: 21W, 2220 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage

(ELV) or Standard (TRIAC) Incandescent **2814.03-6** Satin White

2814.16-6 Bright Satin Aluminum 2814.25-6 Satin Black

2814-8

Thin-Line 8' Indirect LED Wall Bar

3/4" H x 96" W Shade: Aluminum w/Optical Acrylic 34" H x 96" W x 1" D Extension: 3 1/2" Wall Plate: 3/4" H x 1" w LED: 28W, 3120 Lumens (1800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2814.03-8 Satin White 2814.16-8 Bright Satin Aluminum **2814.25-8** Satin Black

2816-3

Thin-Line 3' One-Sided LED Pendant

ONE-SIDED PENDANTS

5" H X 36" W X 34 D Shade: Aluminum w/Optical Acrylic 1" H X 36" W X 34" D Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord LED: 11W, 1110 Lumens (670 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LFD Driver

Dimmable by Electronic Low Voltage

(ELV) or Standard (TRIAC) Incandescent

2816.03-3 Satin White **2816.16-3** Bright Satin Aluminum **2816.25-3** Satin Black

2816-4

Thin-Line 4' One-Sided LED Pendant 5" H X 48" W X 34 D

Shade: Aluminum w/Optical Acrylic 1" H X 48" W X 34" D Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord LED: 14W, 1450 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2816.03-4 Satin White 2816.16-4 Bright Satin Aluminum **2816.25-4** Satin Black

2816-6

5" H x 72" W x 34 D

Thin-Line 6' One-Sided LED Pendant

Shade: Aluminum w/Optical Acrylic 1" н x 72" w x ¾" D Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord LED: 21W, 2220 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/Remote LFD Driver

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent **2816.03-6** Satin White 2816.16-6 Bright Satin Aluminum

2816.25-6 Satin Black

2816-8

Thin-Line 8' One-Sided LED Pendant

5" H x 96" W x ¾ D Shade: Aluminum w/Optical Acrylic 1" н x 96" w x ¾" D Canopy: 1/2" H x 4 1/2" DIA

w/6' Adjustable Cord LED: 28W, 3120 Lumens (1800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/Remote LFD Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2816.03-8 Satin White 2816.16-8 Bright Satin Aluminum

2816.25-8 Satin Black

TWO-SIDED PENDANTS

2818-3

Thin-Line 3' Two-Sided LED Pendant

5" H X 36" W X 34 D Shade: Aluminum w/Optical Acrylic 1" н x 36" w x ¾" D Canopy: (2) 1/2" H X 4 1/2" DIA w/6' Adjustable Cord LED: (2) 21W (total), 2220 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage

(ELV) or Standard (TRIAC) Incandescent

2818.03-3 Satin White **2818.16-3** Bright Satin Aluminum

2818.25-3 Satin Black

2818-4

Thin-Line 4' Two-Sided LED Pendant 5" H X 48" W X 34 D

Shade: Aluminum w/Optical Acrylic 1" H X 48" W X 34" D Canopy: (2) 1/2" H X 4 1/2" DIA w/6' Adjustable Cord LED: (2) 28W (total), 2910 Lumens (1800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2818.03-4 Satin White 2818.16-4 Bright Satin Aluminum 2818.25-4 Satin Black

2818-6

Thin-Line 6' Two-Sided LED Pendant 5" H x 72" W x ¾ D

Shade: Aluminum w/Optical Acrylic 1" H x 72" W x ¾" D Canopy: (2) 1/2" H x 4 1/2" DIA w/6' Adjustable Cord LED: (2) 41W (total), 4440 Lumens (2700 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2818.03-6 Satin White 2818.16-6 Bright Satin Aluminum 2818.25-6 Satin Black

2818-8


Thin-Line 8' Two-Sided LED Pendant 5" H x 96" W x ¾ D Shade: Aluminum w/Optical Acrylic


1" н x 96" w x ¾" D Canopy: (2) 1/2" H x 4 1/2" DIA w/6' Adjustable Cord LED: (2) 55W (total), 6240 Lumens (3590 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/(2) Remote LED Drivers Dimmable by Electronic Low Voltage


(ELV) or Standard (TRIAC) Incandescent **2818.03-8** Satin White

2818.16-8 Bright Satin Aluminum **2818.25-8** Satin Black

Special Order: 3" Mini Canopy available. See price list for details.














Glide LED Pendant w/Downlight
6 ¾" H x 40" W x 3" D
Shade: Aluminum w/Acrylic
Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord LED: (2) 20W (total), 2000 Lumens (total), 775 Lumens Down (1470 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent.

2352.03 Satin White 2352.16 Bright Satin Aluminum2352.25 Satin Black

A flared "V" shaped linear form, with a continuous radius end, defines a minimal profile emitting light bidirectionally. Precisely sophisticated, Glide's modern sleekness is designed to provide balanced LED illumination along a linear situation for both general and task applications.



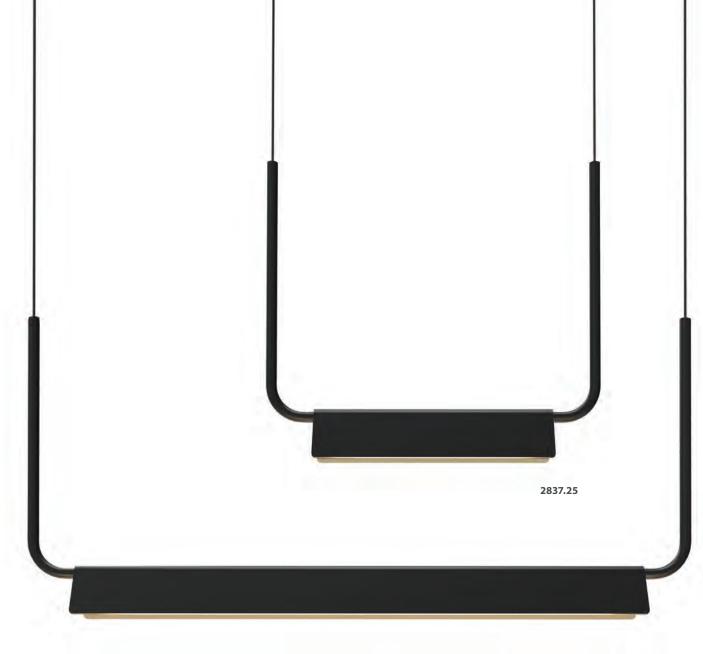

2838.25

morii®

PENDANTS

A shed-like slim aluminum shade drapes a cablesuspended tubular arm in a configuration of Industrial Modern functionality. Available in three lengths, Morii pendants bring linear LED illumination to a task with simplicity and clarity of purpose.

2839

Morii 48" LED Pendant

14" H x 48" W x 2" D Shade: Aluminum

2 ½" н x 44" w x 2" D

Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cord LED: 34W, 3150 Lumens (1350 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2839.03 Satin White

2839.16 Bright Satin Aluminum

2839.25 Satin Black

Special Order: 3" Mini Canopy available. See price list for details.

2838

Morii 30" LED Pendant

14" H x 30" W x 2" D Shade: Aluminum

2 ½" н x 26" w x 2" D

Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cord LED: 23W, 2030 Lumens (870 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2838.03 Satin White2838.16 Bright Satin Aluminum

2838.16 Bright Satin Aluminur **2838.25** Satin Black

Special Order: 3" Mini Canopy available. See price list for details.

2837

Morii 15" LED Pendant


14" H x 15" W x 2" D Shade: Aluminum 2 ½" H x 11" W x 2" D

Canopy: ½" H x 4 ½" DIA W/6' Adjustable Cord LED: 11W, 930 Lumens (400 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2837.03 Satin White
 2837.16 Bright Satin Aluminum
 2837.25 Satin Black

Multiple U.S. and foreign patents pending.

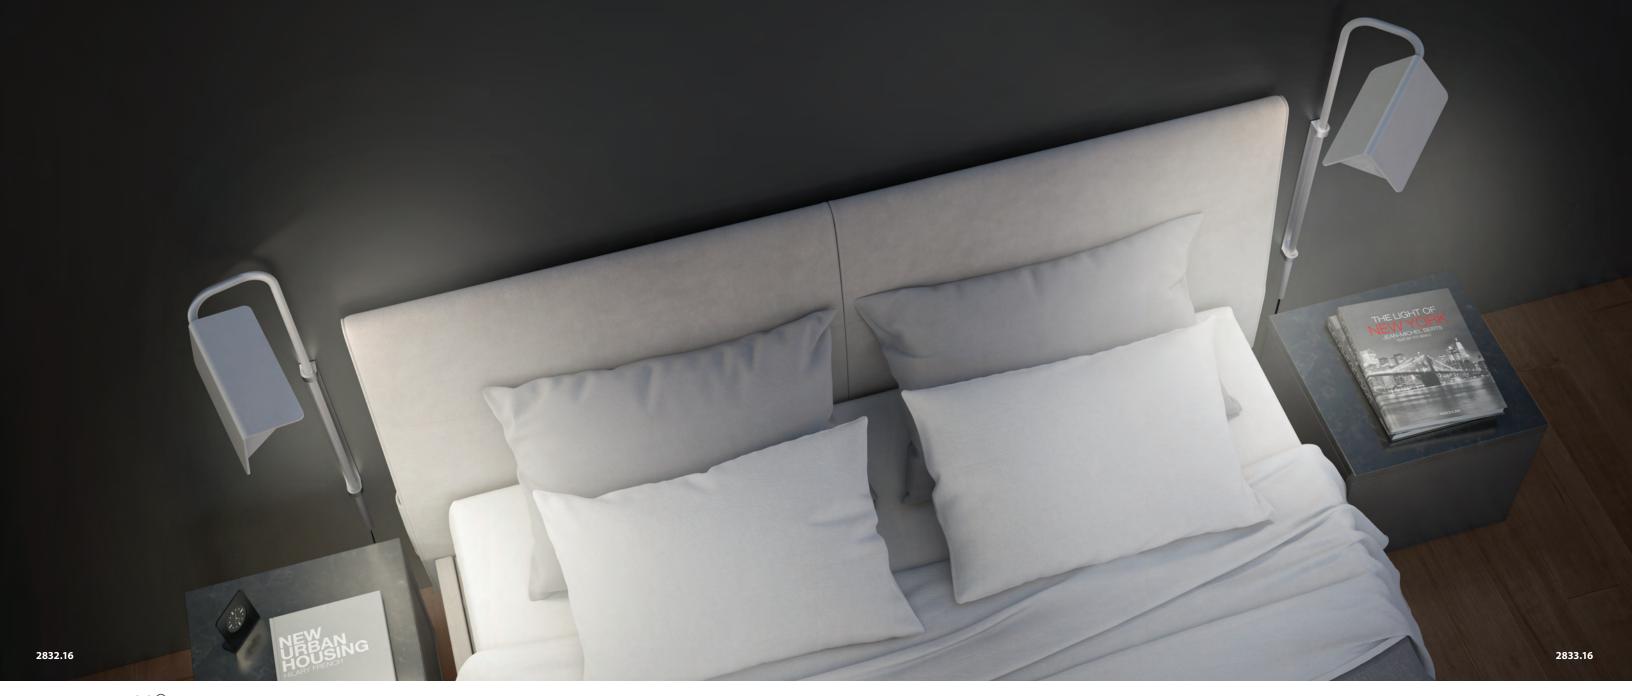

morii®

WALL LAMPS

Left- and right-side mounted Morii wall lamps provide a rotating shade that can swing out from the wall for direct task lighting, or swing in for indirect reflected illumination. Available in left- and right-side mounting options for symmetrical pairing.

2832

Morii Left LED Wall Lamp 25 ¼" H x 9 ¾" W

Shade: Aluminum

2" н x 8" w x 4 ¼" p w/115° Rotation

Extension: 4 ¾"-12 ¼" ADJ.

Wall Plate: 12" H x 3/4" W x 1/4" D W/90° Rotation

Switch: 4-Step Touch Dimmer

LED: 8W, 650 Lumens (430 Net Lumens)

Warm White (3000K), 90 CRI

120-240VAC Input w/Power Supply on Plug

2832.03 Satin White **2832.05** Satin Green

2832.06 Satin Orange **2832.07** Satin Yellow

2832.16 Bright Satin Aluminum

2832.25 Satin Black

2833

Morii Right LED Wall Lamp 25 ¼" H x 9 ¾" W

Shade: Aluminum

2" н x 8" w x 4 ¼" p w/115° Rotation

Extension: 4 ¾"-12 ¼" ADJ.

Wall Plate: 12" H x 3/4" W x 1/4" D W/90° Rotation

Switch: 4-Step Touch Dimmer

LED: 8W, 650 Lumens (430 Net Lumens)

Warm White (3000K), 90 CRI

120-240VAC Input w/Power Supply on Plug

2833.03 Satin White

2833.05 Satin Green **2833.06** Satin Orange **2833.07** Satin Yellow

2833.16 Bright Satin Aluminum

2833.25 Satin Black

Multiple U.S. and foreign patents pending.





Multiple U.S. and foreign patents pending.







aileron®

FLAT PANEL LIGHTING SYSTEM

Unique to the Aileron flat panel lighting system is its revolutionary mounting system. The continuous extruded wall mount compliments the slim linear form, and mounts directly over a 2" electrical box. Optional mounting rail attachments blend smoothly into the profile and extend the height of the mounting bracket to cover a full-size outlet box anywhere along its length, as needed.

aileron®


CONTINUOUS MOUNTING RAIL SYSTEM









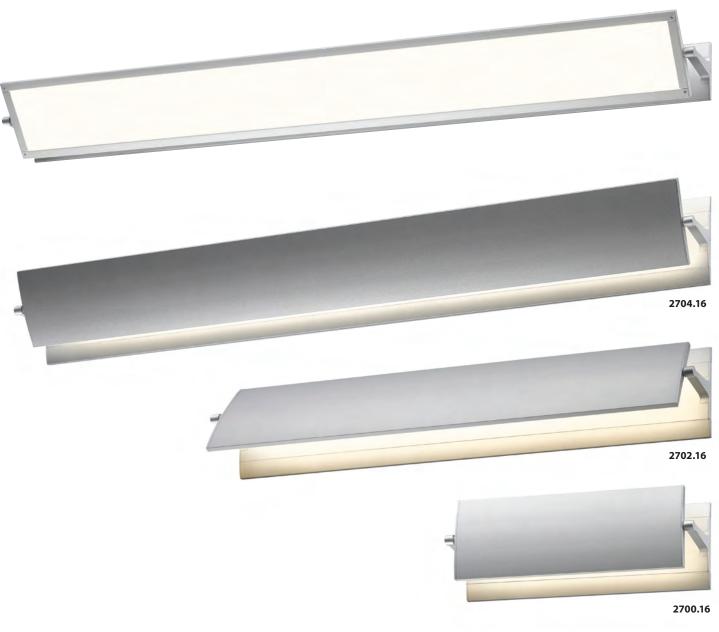

Aileron 12" LED Sconce

4" H x 12 ¼" W
Shade: Aluminum w/LED Flat Panel
4" H x 11 ¼" w x ¾" D
w/270° Rotation
Extension: 3" – 4 ¾" ADJ.
Wall Plate: 2 ¾" x 12 ¼"
LED: 10W, 900 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

Optional Mounting Rails for 4" Outlet Box Available

2700.16 Bright Satin Aluminum2700.98 Textured White

2702

Aileron 24" LED Sconce

4" H x 24" W
Shade: Aluminum w/LED Flat Panel
4" H x 23" w x 3%" D
w/270° Rotation
Extension: 3"-4 34" ADJ.
Wall Plate: 2 3%" x 24"
LED: 20W, 1800 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

Optional Mounting Rails for 4" Outlet Box Available

2702.16 Bright Satin Aluminum2702.98 Textured White

2704


Aileron 36" LED Sconce

4" H x 36" W
Shade: Aluminum w/LED Flat Panel
4" H x 35" w x 3/8" D
w/270° Rotation
Extension: 3"– 4 3/4" ADJ.
Wall Plate: 2 3/4" x 36"
LED: 30W, 2700 Lumens
Warm White (3000K), 80 CRI
100-277VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV),
Standard (TRIAC) Incandescent (at 120VAC only),
or 0–10V

Optional Mounting Rails for 4" Outlet Box Available

2704.16 Bright Satin Aluminum **2704.98** Textured White



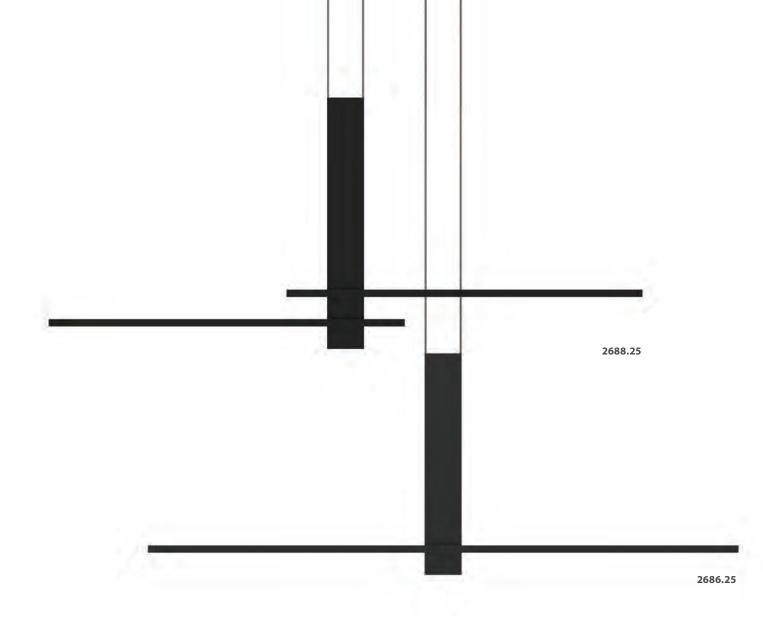

planes®

2688

Planes Cantilevered LED Pendant

17" H x 40 1/4" W x 2 1/2" D Shade: Aluminum w/LED Flat Panel ½" н х 15 ¾" w х 2 ½" D

Canopy: 1/2" H x 4 1/2" sq w/6' Adjustable Cord LED: (2) 18W (total), 1880 Lumens (740 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2688.03 Satin White

2688.16 Bright Satin Aluminum

2688.25 Satin Black

2686

Planes Intersecting LED Pendant

15" н x 40" w x 2 ½" D Shade: Aluminum w/LED Flat Panel 1/2" H x 17 1/2" W x 2 1/2" D

Canopy: 1/2" H x 4 1/2" sq w/6' Adjustable Cord LED: (2) 18W (total), 1880 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI


120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2686.03 Satin White

2686.16 Bright Satin Aluminum 2686.25 Satin Black

INTERSECTING

Suspended from slender parallel cables, an LED flat panel silhouette intersects with the flat face of a vertical plane, in balanced simplicity.

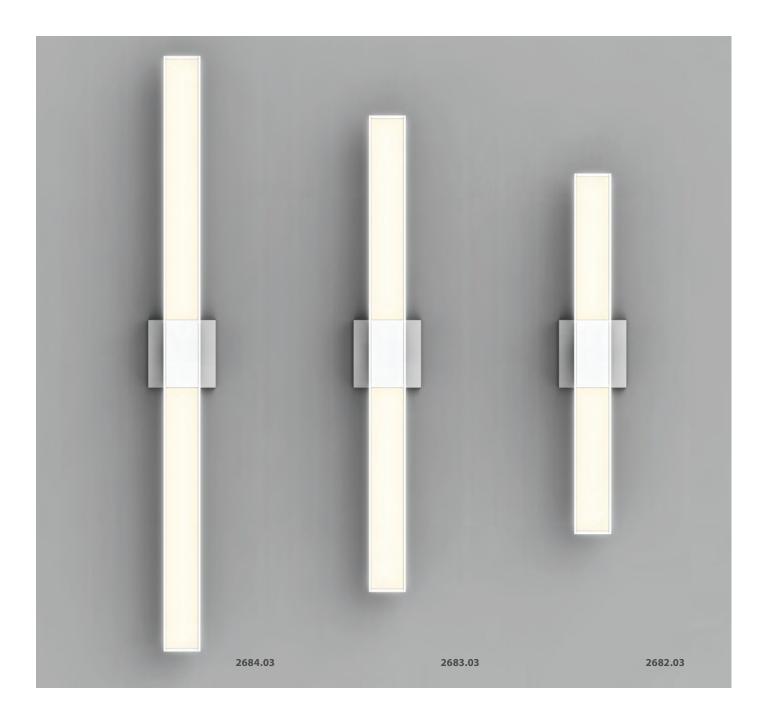

Planes 40" LED Double Sconce

40" H x 2 ½" w Shade: Aluminum w/LED Flat Panel 17 ½" H x 2 ½" w x ½" D

Extension: 2 ½"
Wall Plate: 4 ½" so x ½

Wall Plate: 4 ½" sq x ½" D LED: (2) 17W (total), 1870 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2684.03 Satin White

2684.16 Bright Satin Aluminum2684.25 Satin Black

2683

Planes 32" LED Double Sconce

32" H x 2 ½" w Shade: Aluminum w/LED Flat Panel 13 ½" H x 2 ½" w x ½" D Extension: 2 ½" Wall Plate: 4 ½" sq x ½" D

Wall Plate: 4 72 SQ X 72 D LED: (2) 12W (total), 1450 Lumens (450 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

AD

2683.03 Satin White

2683.16 Bright Satin Aluminum2683.25 Satin Black

2682

Planes 24" LED Double Sconce 24 1/4" H x 2 1/2" W

Shade: Aluminum w/LED Flat Panel 9 ¾" H x 2 ½" w x ½" D Extension: 2 ½" Wall Plate: 4 ½" so x ½" D LED: (2) 9W (total), 970 Lumens (250 Net Lumens)

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2682.03 Satin White **2682.16** Bright Satin Aluminum **2682.25** Satin Black

Warm White (3000K), 90 CRI



panels

Crisp-edged square panels in polished chrome, precisely arranged on rectangular bars, form rectilinear compositions in multiple configurations along a horizontal plane. Technologically advanced, edge-lit LED light panels distribute glare-free illumination evenly across each luminous surface.



2575

Panels 5-Light LED Bar Pendant 6 ¾" H x 44 ¼" W x 6" D Shade: Die-Cast Aluminum w/LED Flat Panel ½" H x 6" sq LED (5): 41W (total), 2330 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box


2575.01 Polished Chrome



2577

Panels 7-Light Rectangle LED Pendant 1 ½" H x 39" W x 23 ¾" D Shade: Die-Cast Aluminum w/LED Flat Panel ½" н x 6" sq Canopy: 4 ½" sq w/6' Adjustable Cord LED (7): 56W (total), 3260 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2577.01 Polished Chrome

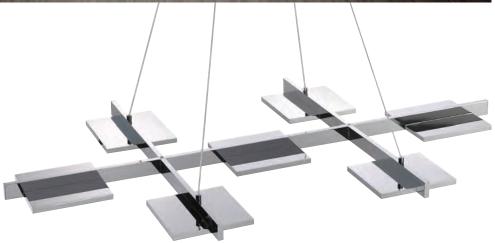



panels

2574

Panels 4-Light LED Bar Pendant 6 ¾" H x 35 ¼" W x 6" D Shade: Die-Cast Aluminum w/LED Flat Panel ½" н х 6" sq Canopy: 10 ¼" х 4 ½" w/6' Adjustable Cord LED (4): 34W (total), 1860 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2574.01 Polished Chrome





2570

Panels LED Wall Torchiere

4 ½" H x 6" W Shade: Die-Cast Aluminum w/LED Flat Panel ½" H X 6" SQ Extension: 8 ¼" Wall Plate: 4 1/2" sq LED: 10W, 470 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2570.01 Polished Chrome



Float 24" LED Pendant

Shade: Die-Cast Aluminum w/Optical Acrylic 1 ¼" h x 13" dia

Canopy: ¾" H x 4 ½" DIA W/6' Adjustable Cords LED: 20W, 1810 Lumens (1090 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2622.01 Polished Chrome w/Clear Glass **2622.13** Satin Nickel w/Etched Glass



2620

Float 18" LED Pendant

Shade: Die-Cast Aluminum w/Optical Acrylic 1 ¼" h x 13" dia

Canopy: ¾" H x 4 ½" DIA W/6' Adjustable Cords LED: 20W, 1810 Lumens (1090 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2620.01 Polished Chrome w/Clear Glass **2620.13** Satin Nickel w/Etched Glass



ARCHITECTURAL | SONNEMAN 175





torus®

2870

Torus 24" LED Pendant

2" h x 24" dia

Shade: Aluminum w/Satin White Interior Canopy: 1 ¾" H X 5" DIA w/6' Adjustable Cable LED: 28W, 2670 Lumens (780 Net Lumens) Warm White (3000K), 90 CRI

120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2870.03 Satin White **2870.18** Dove Gray 2870.25 Satin Black

2872 Torus 32" LED Pendant

2" h x 32" dia Shade: Aluminum w/Satin White Interior

Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 42W, 4010 Lumens (1160 Net Lumens) Warm White (3000K), 90 CRI 120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2872.03 Satin White **2872.18** Dove Gray 2872.25 Satin Black A precisely curved form is revolved around a center axis, forming a Torus of reflected LED luminance that appears to float in air with an open lightness. Hung high or low within a space, its delicate presence glows with a warm reflected brightness.



tromme®

Tromme reimagines the solid geometry of these classic aluminum drums, and provides visual weight with see-through lightness. LED illumination from the top edge is reflected through tapered interior acrylic diffusers, radiating an even glow of shadow-free illumination.

2865

Tromme 24" LED Pendant

7" н х 24" діа

Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 36W, 4200 Lumens (1790 Net Lumens) Warm White (3000K), 90 CRI 120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2865.03 Satin White

2865.16 Bright Satin Aluminum

2865.25 Satin Black

2862

Tromme 18" Short LED Pendant

4" h x 18" dia

Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 22W, 2650 Lumens (1080 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2862.03 Satin White

2862.16 Bright Satin Aluminum

2862.25 Satin Black

2863

Tromme 18" LED Pendant

7" H X 18" DIA

Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 22W, 2650 Lumens (1080 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2863.03 Satin White

2863.16 Bright Satin Aluminum 2863.25 Satin Black

2864

Tromme 24" Short LED Pendant

4" H X 24" DIA

Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 1 ¾" H x 5" DIA W/6' Adjustable Cable LED: 36W, 4200 Lumens (1790 Net Lumens) Warm White (3000K), 90 CRI 120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2864.03 Satin White

2864.16 Bright Satin Aluminum

2864.25 Satin Black



Koma Taisho Pendant

11" h x 9" dia

Shade: Aluminum w/Satin White Interior 11" h x 9" dia

Canopy: 5" DIA

w/10' Adjustable Silk Covered Cord Bulb: (1) 75W (Incandescent) or 42W (LED) Medium Base or (1) 42W GU24 Base (9W GU24 LED Puck Lamp available)

850 Lumens, Warm White (3000K), 80 CRI

2750.03- Satin White w/White Silk Covered Cord

2750.16- Bright Satin Aluminum w/Silver Silk Covered Cord

2750.25- Satin Black

w/Black Silk Covered Cord

2752

Koma Meiji Pendant 7 ¼" H x 15" DIA

Shade: Aluminum w/Satin White Interior 7 1/4" h x 15" dia

Canopy: 5" DIA

w/10' Adjustable Silk Covered Cord Bulb: (1) 75W (Incandescent) or 42W (LED) Medium Base or (1) 42W GU24 Base (9W GU24 LED Puck Lamp available)

850 Lumens, Warm White (3000K), 80 CRI

2752.03- Satin White w/White Silk Covered Cord

2752.25- Satin Black

w/Black Silk Covered Cord

2754

Koma Edo Pendant

6 ¼" н x 20" dia

Shade: Aluminum w/Satin White Interior 6 ¼" н x 20" dia

Canopy: 5" DIA

w/10' Adjustable Silk Covered Cord Bulb: (1) 75W (Incandescent) or 42W (LED) Medium Base or (1) 42W GU24 Base (9W GU24 LED Puck Lamp available)

850 Lumens, Warm White (3000K), 80 CRI

2754.03- Satin White

2754.25- Satin Black

w/White Silk Covered Cord w/Black Silk Covered Cord

KOMA BULB SELECTION





Bulb Type

Bulb Type

E E26 Base

G GU24 Base





The essence of a circle.

2747

Pi 16" LED Surface Mount

Shade: Metal w/Optical Acrylic Diffuser Canopy: 16" DIA LED: 30W, 2800 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2747.16 Bright Satin Aluminum 2747.32 Black Bronze 2747.98 Textured White

2746

Pi 12" LED Surface Mount

2" H X 12" DIA Shade: Metal w/Optical Acrylic Diffuser Canopy: 12" DIA LED: 22W, 2000 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2746.16 Bright Satin Aluminum **2746.32** Black Bronze **2746.98** Textured White

2745

Pi 8" LED Surface Mount

2" H X 8" DIA Shade: Metal w/Optical Acrylic Diffuser Canopy: 8" DIA LED: 20W, 1800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2745.16 Bright Satin Aluminum 2745.32 Black Bronze 2745.98 Textured White



2740

Pi 16" LED Pendant

2" H X 16" DIA Shade: Metal w/Optical Acrylic Diffuser Canopy: 5 ½" DIA w/6' Adjustable Cable LED: 30W, 2800 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0–10V

2740.16 Bright Satin Aluminum **2740.32** Black Bronze

2742

Pi 20" LED Pendant

2" H X 20" DIA Shade: Metal w/Optical Acrylic Diffuser Canopy: 5 1/2" DIA W/6' Adjustable Cable LED: 50W, 4700 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0–10V

2742.16 Bright Satin Aluminum **2742.32** Black Bronze



2742.32









Puck Slim 8" LED Surface Mount

2 ½" h x 8" dia Shade: Metal w/White Acrylic Diffuser 2 ½" н х 8" dia Canopy: 6" dia LED: 13W, 900 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

3723.13 Satin Nickel 3723.35 Polished Nickel

3724

Puck Slim 12" LED Surface Mount 2 1/2" H x 12" DIA Shade: Metal w/White Acrylic Diffuser 2 ½" н х 12" dia Canopy: 10" dia LED: 22W, 1530 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

3724.35 Polished Nickel

3725

Puck Slim 15" LED Surface Mount 2 1/2" H X 15" DIA Shade: Metal w/White Acrylic Diffuser 2 ½" H x 15" DIA Canopy: 13" DIA LED: 26W, 1800 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

3725.35 Polished Nickel

oculus









3730

Oculus 10" LED Surface Mount

2 ½" h x 10" dia

Shade: Metal w/6" DIA Optical Acrylic Diffuser Canopy: 10" DIA

LED: 19W, 1155 Lumens (820 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

3730.03 Satin White **3730.13** Satin Nickel **Polished Nickel**

3731

Oculus 13" LED Surface Mount

2 ½" H x 13" DIA Shade: Metal w/9" DIA Optical Acrylic Diffuser Canopy: 13" DIA

LED: 25W, 1725 Lumens (1225 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

Dimmable by Electronic Low Vol 3731.03 Satin White

3731.13 Satin Nickel **3731.35** Polished Nickel

3732

Oculus 16" LED Surface Mount

2 ½" h x 16" dia

Shade: Metal w/10 1/2" DIA Optical Acrylic Diffuser Canopy: 16" DIA

LED: 31W, 1895 Lumens (1345 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

3732.03 Satin White **3732.13** Satin Nickel **Polished Nickel**



120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2630.01 Polished Chrome **2630.03** Satin White 2630.13 Satin Nickel

2630.03



center eclipse corner eclipse 2368 Center Eclipse LED Sconce 8" H × 8" W Shade: Die-Cast Aluminum Extension: 1 ½" Wall Plate: 4 ½" sq

LED: 11W, 720 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2368.98

2368.98 Textured White



2369

Corner Eclipse LED Sconce

Shade: Die-Cast Aluminum Extension: 1 1/2" Wall Plate: 4 1/2" sq LED: 11W, 720 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2368.98

2369.98

2369.98 Textured White

offset 2729.98



2727

Offset Square LED Surface Mount 2 ½" H x 15" W x 15" D


Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 10" sq LED: 22W, 2100 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V


2727.98 Textured White

2729

Offset Round LED Surface Mount 2 1/2" H x 15 3/4" DIA Shade: Aluminum w/Optical Acrylic Diffuser Canopy: 10" DIA LED: 30W, 2700 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2729.98 Textured White

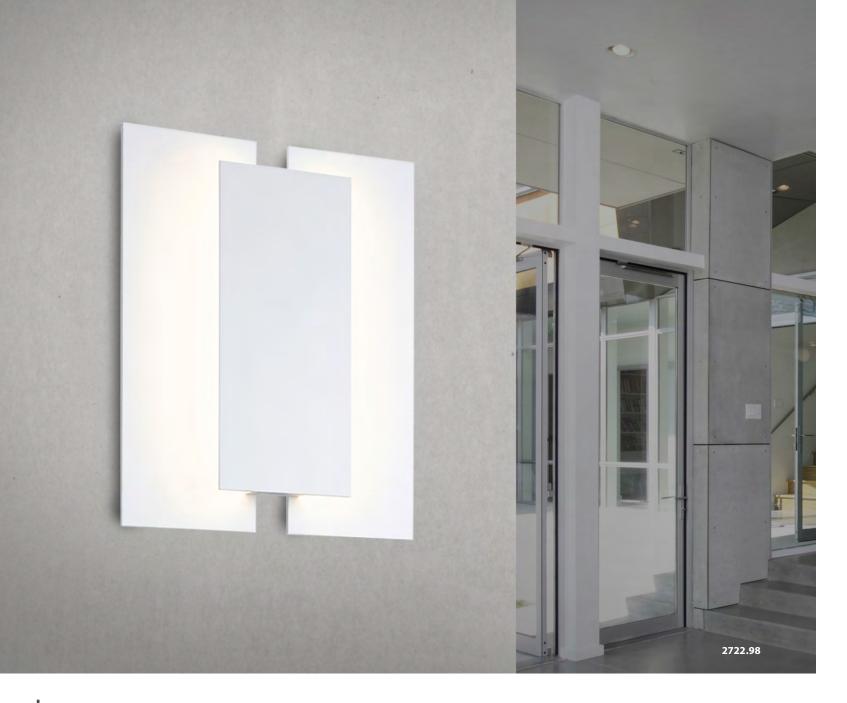

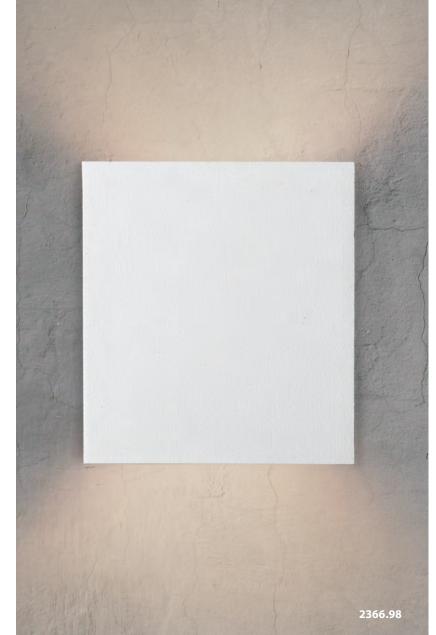



batten

Light is reflected from two vertical planes secured by an offset Batten.

2722

Batten LED Sconce

11" H x 9" w
Shade: Aluminum
Extension: 1 ¾"
Wall Plate: 7 ¾" x 4 ½"
LED: 24W, 1400 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/12VAC
Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

2722.98 Textured White

2366

Angled Plane LED Sconce

8" H x 7 ½" w
Shade: Aluminum
Extension: 2 ¼"
Wall Plate: 5 ¼" x 5 ½"
LED: 20W, 1350 Lumens
(900 Up, 450 Down)
Warm White (3000K), 80 CRI
120VAC Input w/12VAC Transformer in Fixture
Dimmable by Electronic
Low Voltage (ELV)

ADA

2366.98 Textured White

2365

Angled Plane Narrow LED Sconce

7 ¾" H x 4" W
Shade: Aluminum
Extension: 2 ¼"
Wall Plate: 5 ½" x 2 ¾"
LED: 13W, 800 Lumens
(450 Up, 350 Down)
Warm White (3000K), 80 CRI
120VAC Input w/12VAC Transformer in Fixture
Dimmable by Electronic
Low Voltage (ELV)

2365.98 Textured White

Impossible to improve on geometry, Angled Plane and its slimmer, perfectly poised, rectangular counterpart reflects light on a wall with an upward and downward projection.

angled plane

We also offer Inside-Out versions of Angled Plane with downlight only, for both exterior and interior locations. See page 373





Toma LED Sconce
4 %" DIA
Shade: Die-Cast Aluminum
Extension: 2 %"
Wall Plate: 4 %" DIA
LED: 3W, 200 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/LED Driver
Non-Dimmable

ADA

2362.98 Textured White



toma





bracket

2372

Bracket LED Sconce

4 ½" H X 4 ½" W
Head: Die-Cast Aluminum
Extension: 4"
Wall Plate: 4 ½" so
LED: 13W, 900 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

AUA

2372.98 Textured White

wedge LED

2370

Wedge LED Sconce

4 ½" H x 4 ½" W
Head: Die-Cast Aluminum
Extension: 4"
Wall Plate: 4 ½" sq
LED: 13W, 900 Lumens
Warm White (3000K), 80 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

ADA

2370.98 Textured White



lambda

Two simply flanged plates are set apart in tension to form a reveal, unified by the purpose of its form.



Lambda LED Pendant

5 ¾" H x 5" W x 3 ½" D Shade: Die-Cast Aluminum Canopy: 4 ½" so w/6' Adjustable Cord LED: 13W, 1050 Lumens Warm White (3000K), 80 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2730.16 Bright Satin Aluminum **2730.98** Textured White



Dao LED Wall Torchiere 8" H x 16 1/4" W

8" H x 16 ¼" w
Shade: Optical Acrylic
Extension: 2 ¼"
Wall Plate: 6 ½" x 3"
LED: 35W, 1740 Lumens
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

dao

ADA

2780.03 Satin White **2780.25** Satin Black







200





light guide ring

Floating within an aluminum ring, an LED source edge-lights a light guide disk that redirects its luminance to its upper and lower surfaces, producing a glare-free radiance. Arranged in single and multiple configurations, the Light Guide Rings offer exciting illuminating solutions to both larger and smaller environments.

2656

Light Guide Ring 9-Light LED Pendant 1 ½" H x 48 ¼" DIA

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia

Canopy: 1 ½" н x 8" DIA w/6' Adjustable Cords LED: (9) 60W (total), 5517 Lumens (4860 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only),

2656.03A Satin White w/Apricot Interior **2656.03W** Satin White w/Satin White Interior 2656.25A Satin Black w/Apricot Interior **2656.25W** Satin Black w/Satin White Interior



Light Guide Ring 4-Light LED Bar Pendant

1 ½" H x 37 ½" W x 17 ½" D

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia

Canopy: 1 1/4" H x 8" w x 5" D w/6' Adjustable Cords LED: (4) 38W (total), 3310 Lumens (2920 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2655.25A 2655.25W

2655.03A Satin White w/Apricot Interior Satin White w/Satin White Interior Satin Black w/Apricot Interior Satin Black w/Satin White Interior

2654

Light Guide Ring 3-Light LED Pendant

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia

Canopy: 1 1/4" H x 6" DIA Stem Kit: (3) 12" + (1) 6"

LED: (3) 30W (total), 2535 Lumens (2235 Net Lumens) Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

2654.03A Satin White w/Apricot Interior 2654.03W Satin White w/Satin White Interior 2654.25A Satin Black w/Apricot Interior 2654.25W Satin Black w/Satin White Interior




light guide ring

The Light Guide Ring uses an innovative system of redirected, glare-free LED illumination. The light guide transmits light from an LED source at its edge, evenly distributing the light over the face of the light guide through a precisely engineered pattern of light extraction points that provide an evenly lit, low-glare appearance, while maintaining the translucency of the optically clear acrylic disk.





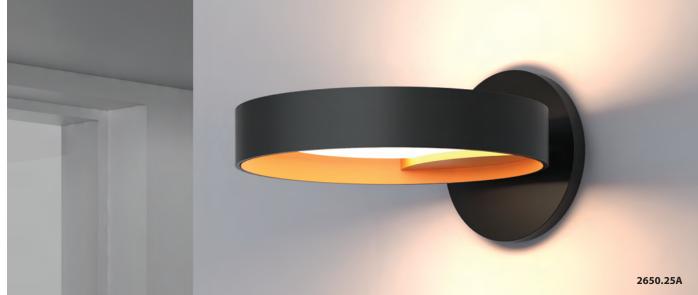

light guide ring

2653

Light Guide Ring 2-Light LED Pendant

4 1/4" H x 18 1/2" W x 8" D

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia

Canopy: 1/2" H x 5" DIA W/6' Adjustable Cords LED: (2) 21W (total), 1815 Lumens (1600 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2653.03A Satin White w/Apricot Interior **2653.03W** Satin White w/Satin White Interior 2653.25A Satin Black w/Apricot Interior **2653.25W** Satin Black w/Satin White Interior

2652

Light Guide Ring LED Pendant

16" H x 7 ¾" W x 8 ½" D

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia

Canopy: ½" H x 5" DIA W/6' Adjustable Cord LED: 13W, 1055 Lumens (930 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2652.03A Satin White w/Apricot Interior **2652.03W** Satin White w/Satin White Interior **2652.25A** Satin Black w/Apricot Interior **2652.25W** Satin Black w/Satin White Interior

2650

Light Guide Ring LED Sconce

Shade: Aluminum w/Acrylic Light Guide Disk 1 ½" h x 8" dia Extension: 9" Wall Plate: 5" DIA

LED: 13W, 1055 Lumens (930 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2650.03A Satin White w/Apricot Interior 2650.03W Satin White w/Satin White Interior 2650.25A Satin Black w/Apricot Interior 2650.25W Satin Black w/Satin White Interior

2651

Light Guide Ring Double LED Sconce

Shade: Aluminum w/Acrylic Light Guide Disk

1 ½" h x 8" dia Extension: 8 1/2"

Wall Plate: 5" DIA LED: (2) 21W (total), 1815 Lumens (1600 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2651.03A Satin White w/Apricot Interior 2651.03W Satin White w/Satin White Interior 2651.25A Satin Black w/Apricot Interior 2651.25W Satin Black w/Satin White Interior

ARCHITECTURAL | SONNEMAN





counterpoint®

2883

Counterpoint 6-Light LED Pendant

10" н х 45" DIA Shade: Aluminum w/Optical Acrylic (3) 3" H X 2 3/4" DIA (3) 1 ½" H x 4 DIA Canopy: 1/2" H x 5" DIA Stem Kit: (3) 12" + (1) 6" LED: (6) 16W (total), 1780 Lumens (1050 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2883.03 Satin White **2883.16** Bright Satin Aluminum **2883.25** Satin Black

This mobile-like artful lighting composition achieves visual balance through the tension of varying scales and the counterpoise of dissimilar volumes around its center. Flat discs and deep cylindrical forms, of different visual weights in juxtaposition to each other, are counterbalanced on offset slender arms in a rotating system of mass. Dramatically powerful in its simplicity, Counterpoint delivers bright LED luminance downward, with a subtly lit edge from the solid acrylic lenses of its cylindrical heads.









pluck®


Available in two sizes, Pluck wall lamps can swing out for maximum extension or be folded against the wall. The brightness of the LED light source is adjusted by a touch of the dimmer on the puck's top surface.

2842

Pluck Small LED Wall Lamp

33 ½" н x 4" w Shade: Die-Cast Aluminum w/LED Flat Panel 34" H x 3 1⁄4" DIA W/Magnetic Ball Joint Extension: 4" to 15 1/4" Wall Plate: 12" H X 3/4" W X 1/4" D W/180° Rotation Switch: 4-Step Touch Dimmer LED: 8W, 650 Lumens (330 Net Lumens) Warm White (3000K), 90 CRI 120-240VAC Input w/Power Supply on Plug

2842.03 Satin White **2842.16** Bright Satin Aluminum **2842.25** Satin Black

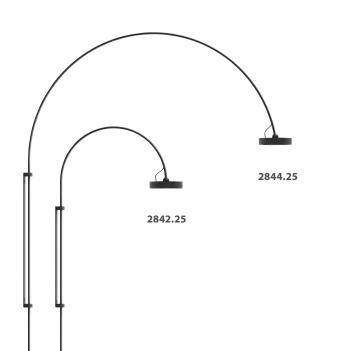

2844

Pluck Large LED Wall Lamp

44 ¾" H X 4" W

Shade: Die-Cast Aluminum w/LED Flat Panel 34" H x 3 1⁄4" DIA W/Magnetic Ball Joint

Extension: 4" to 32 1/4" Wall Plate: 12" H x ¾" W x ¼" D W/180° Rotation

Switch: 4-Step Touch Dimmer LED: 8W, 650 Lumens (330 Net Lumens)

Warm White (3000K), 90 CRI 120-240VAC Input w/Power Supply on Plug

2844.03 Satin White

2844.16 Bright Satin Aluminum **2844.25** Satin Black

ARCHITECTURAL | SONNEMAN 217

pluck®

FLOOR LAMPS Available in two sizes, Pluck floor lamps feature adjustable height arcs. The brightness of the LED light source is adjusted by a touch of the dimmer on the puck's top surface.



2848.03

Pluck Small LED Floor Lamp

43 ¼-53 ¼" h adj. x 19 ¾" w x 10" d Shade: Die-Cast Aluminum w/LED Flat Panel ¾" н x 3 ¼" dia w/Magnetic Ball Joint Base: 1/2" H x 10" DIA Switch: 4-Step Touch Dimmer LED: 8W, 650 Lumens (330 Net Lumens) Warm White (3000K), 90 CRI 120-240VAC Input w/Power Supply on Plug

2846.03 Satin White **2846.16** Bright Satin Aluminum 2846.25 Satin Black

2848

Pluck Large LED Floor Lamp

60-72" H ADJ. X 37 ¾" W X 12" D Shade: Die-Cast Aluminum w/LED Flat Panel ¾" H X 3 ¼" DIA w/Magnetic Ball Joint Base: ½" н x 12" DIA Switch: 4-Step Touch Dimmer LED: 8W, 650 Lumens (330 Net Lumens) Warm White (3000K), 90 CRI 120-240VAC Input w/Power Supply on Plug

2848.03 Satin White 2848.16 Bright Satin Aluminum 2848.25 Satin Black

2846.25

2848.25

quattro®

220 U.S. and foreign patents protected.

TASK LAMP

Ultra-bright, glare-free illumination from LED flat panel technology. Quattro's ingeniously articulated rectangular arm moves through an extensive range of elevation, free from external supporting springs or exposed components.



2050.63







quattro®

2052

Quattro Double Arm LED Wall Lamp 5 ½"–32" H ADJ. X 3 ½" W Head: ½" н x 3 ½" w x 3 ½" D Extension: 15"–33 ½" ADJ. Wall Plate: 2 ¾" sq w/180° Rotation Switch: 3-Step Optical Dimmer LED Flat Panel, 6W Warm White (3000K), 85 CRI 900 Lux @ 18" 100-240VAC Input w/LED Driver

2052.16 Bright Satin Aluminum


2052.63 Black 2052.69 Red/Yellow/Black

WALL LAMP


Quattro Double Arm LED Wall Lamp is engineered to maximize the comfort of the user and the usefulness of each dimming level. Controlled from a touchless optical sensor.











Direct & Indirect Light

indirect + direct lighting variable color uplight with white downlight

2602

Chromaglo Spectrum LED Square Reflector Pendant

7" H x 20" W x 20" D
Head: Die-Cast Aluminum w/White Acrylic
Diffuser and White Glass Reflector
Canopy: 6" so, w/6' Adjustable Cord
LED: 25W total, 13W, 1100 Lumens Downlight
Warm White (3000K), 80 CRI
w/Color Controllable LED Uplight, 120VAC Input
w/LED Driver and RGBW Controller, Dimming
and Color Adjustment by IR Remote (included)

2602.03 Satin White









chromaglo®

SPECTRUM

Chromaglo Spectrum brings the excitement of variable color illumination with infinite opportunities to change the environment and alter the mood. Spectrum lets you control the lighting in a variety of ways with options and variability in direction, distribution, intensity, and color.


2600

Chromaglo Spectrum LED

Round Reflector Pendant

7" H x 22" DIA
Head: Die-Cast Aluminum w/White Acrylic
Diffuser and White Glass Reflector
Canopy: 6" DIA, w/6' Adjustable Cord
LED: 25W total, 13W, 1100 Lumens Downlight
Warm White (3000K), 80 CRI
w/Color Controllable LED Uplight, 120VAC Input
w/LED Driver and RGBW Controller, Dimming and
Color Adjustment by IR Remote (included)

2600.03 Satin White

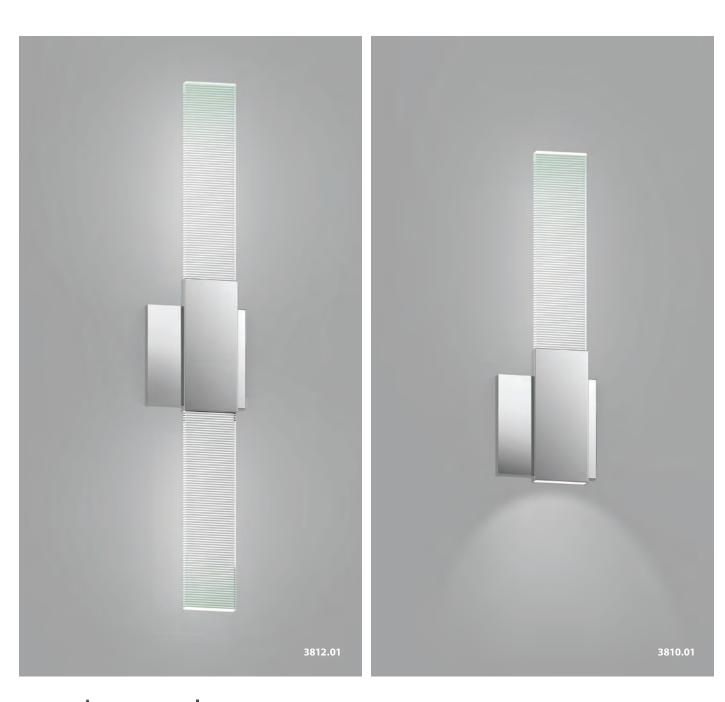

radiant lines®

Exquisitely refined, an LED edge-lit glass panel produces bidirectional luminance with transparency, from precisely controlled parallel Radiant Lines in a tight surface pattern. Available in two configurations: with dual glass panels for vertical or horizontal mounting, and a single glass panel with a wall-washing downlight recessed within the rectilinear form.

3812

24" H x 2 ½" W

Radiant Lines LED Double Sconce

Shade: Glass Light Guide 9" H X 2 ¼" W X ½" D Extension: 3" Wall Plate: 4 1/2" sq x 1/2" D LED: (2) 17W (total), 1590 Lumens (1060 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or

ADA

3812.01 Polished Chrome


Standard (TRIAC) Incandescent

3810

Radiant Lines LED Sconce w/Downlight


15" н x 2 ½" w Shade: Glass Light Guide 9" H X 2 1/4" W X 1/2" D Extension: 3" Wall Plate: 4 1/2" sq x 1/2" D LED: (2) 17W (total), 1590 Lumens (1060 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3810.01 Polished Chrome

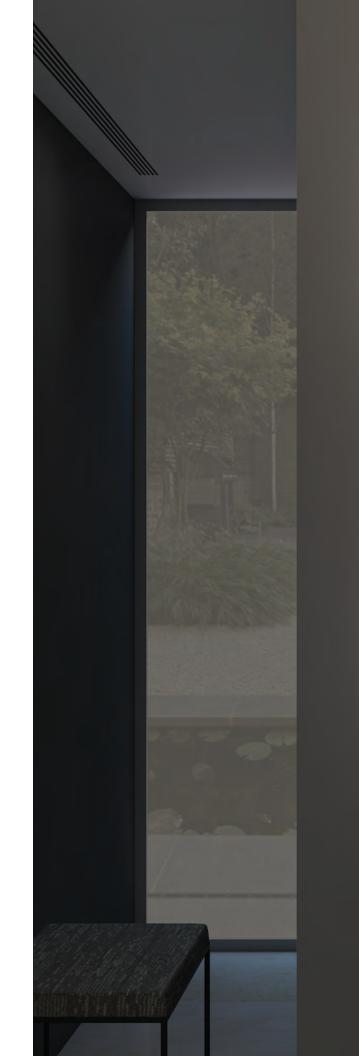





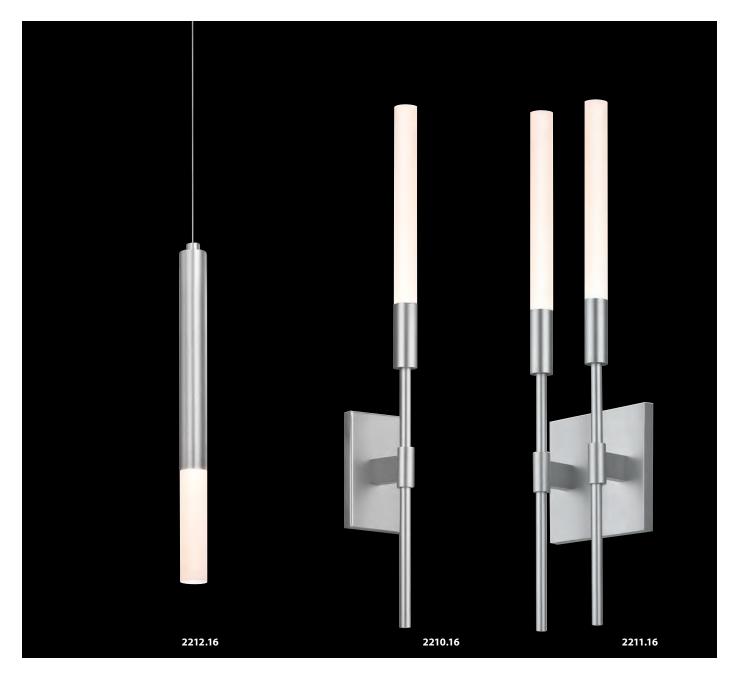

2212

Wands 1-Light LED Pendant

11 ¾" H X 1" DIA
Shade: Frosted Acrylic
Canopy: 4 ½" DIA w/6' Adjustable Cord
LED: 3W, 200 Lumens
Warm White (3000K), 80 CRI
100-240VAC Input w/LED Driver in Outlet Box
Non-Dimmable

2212.16 Bright Satin Aluminum

2210

Wands 1-Arm LED Sconce

20 ¾" H x 2 ½" W
Shade: Frosted Acrylic
Extension: 2 ½"
Wall Plate: 4 ¾" x 2 ½"
LED: 3W, 200 Lumens
Warm White (3000K), 80 CRI
100-240VAC Input w/LED Driver in Outlet Box
Non-Dimmable

ADA

2210.16 Bright Satin Aluminum

2211

Wands 2-Arm LED Sconce


20 ¾" H x 5 ¼" W
Shade: Frosted Acrylic
Extension: 2 ½"
Wall Plate: 5 ¼" so
LED (2): 5W total, 400 Lumens
Warm White (3000K), 80 CRI
100-240VAC Input w/LED Driver in Outlet Box
Non-Dimmable

ADA

2211.16 Bright Satin Aluminum







micro cone

2380

Micro Cone LED Pendant

10" н х 1¾" DIA Shade: Frosted Acrylic Canopy: 4 1/2" DIA W/6' Adjustable Cord LED: 8W, 600 Lumens Warm White (3000K), 80 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2380.16 Bright Satin Aluminum 2380.25 Satin Black

2381

Micro Cone LED Sconce

10" н x 4 ½" w Shade: Frosted Acrylic Extension: 2 1/2" Wall Plate: 4 ½" sq LED: 8W, 600 Lumens Warm White (3000K), 80 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2381.25 Satin Black

micro tube

2390

Micro Tube LED Pendant 8 ½" H X 1½" DIA Shade: Frosted Acrylic Canopy: 4 1/2" DIA W/6' Adjustable Cord LED: 8W, 600 Lumens Warm White (3000K), 80 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2390.16 Bright Satin Aluminum **2390.25** Satin Black

2390.16





3015

Light Chimes LED Pendant

24 ½" to 32 ½" H x 5" DIA

Shade: Aluminum w/Frosted Acrylic

(1) 24 ½" H X ½" DIA (for -24)

(1) 32 ½" H X ½" DIA (for -32)

Canopy: ½"H x 5" DIA W/10' Adjustable Cord LED: 3W, 290 Lumens (150 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/24V Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

3015.03-24 Satin White **3015.03-32** Satin White **3015.25-24** Satin Black **3015.25-32** Satin Black

3016

Light Chimes 3-Light LED Pendant

24 ½" to 32 ½" h x 6" dia

Shade: Aluminum w/Frosted Acrylic

(2) 24 ½" h x ½" dia

(1) 32 ½" H X ½" DIA

or (3) for -24, -32 options

Canopy: 1/2" H x 6" DIA W/10' Adjustable Cord LED: (3) 9W (total), 870 Lumens (450 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/24V Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

3016.03-24 Satin White **3016.03-32** Satin White 3016.03-AST Satin White **3016.25-24** Satin Black **3016.25-32** Satin Black 3016.25-AST Satin Black

3017

Light Chimes 6-Light LED Pendant

24 ½" to 32 ½" h x 10" dia

Shade: Aluminum w/Frosted Acrylic

(3) 24 ½" H X ½" DIA

(3) 32 ½" H X ½" DIA

or (6) for -24, -32 options

Canopy: ½" H x 10" DIA w/10' Adjustable Cord LED: (6) 18W (total), 1740 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI


120VAC Input w/24V Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV) **3017.03-24** Satin White

3017.03-32 Satin White

3017.03-AST Satin White **3017.25-24** Satin Black

3017.25-32 Satin Black 3017.25-AST Satin Black

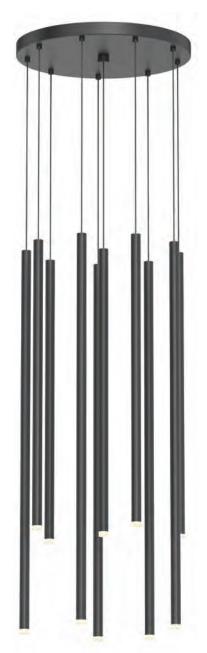

3018.25-AST

3018

Light Chimes 10-Light LED Pendant 24 ½" to 32 ½" H x 15" DIA

Shade: Aluminum w/Frosted Acrylic

(5) 24 ½" h x ½" dia (5) 32 ½" H X ½" DIA

or (10) for -24, -32 options

Canopy: 1" H x 15" DIA w/10' Adjustable Cord

LED: (10) 30W (total), 2900 Lumens (1500 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/24V Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

3018.03-24 Satin White


3018.03-32 Satin White

3018.03-AST Satin White

3018.25-24 Satin Black

3018.25-32 Satin Black

3018.25-AST Satin Black

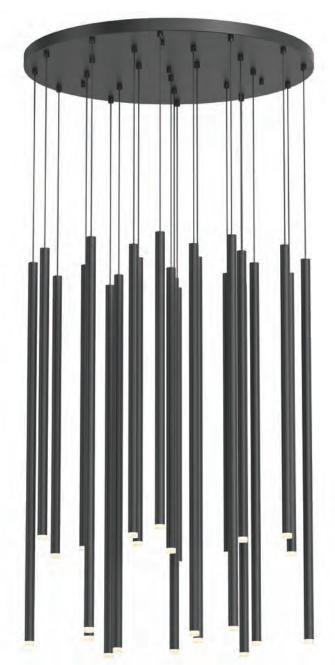

3019.25-AST

Shade: Aluminum w/Frosted Acrylic

(12) 24 ½" h x ½" dia

(12) 32 ½" h x ½" dia

or (24) for -24, -32 options

Canopy: 1" H x 25" DIA W/10' Adjustable Cord

120VAC Input w/24V Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

3019.03-AST Satin White

3019.25-24 Satin Black

3019.25-AST Satin Black



Light Chimes 24-Light LED Pendant 24 ½" to 32 ½" H x 25" DIA

LED: (24) 72W (total), 6960 Lumens (3600 Net Lumens)

Warm White (3000K), 90 CRI

3019.03-24 Satin White

3019.03-32 Satin White

3019.25-32 Satin Black







ALC TRIMS



Bezel (B)

Snoot (S)



Etched Glass (G)





Etched Ribbon Glass (F)





3059

ALC 3" Tall LED Pendant

21 1/4" H X 3" DIA Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

8059.01-	Polished Ch
8059.03-	Satin White
8059.13-	Satin Nickel
8059.25-	Satin Black

3058

ALC 3" Medium LED Pendant

15 1/4" H X 3" DIA

Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or

Standard (TRIAC) Incandescent **3058.01-** Polished Chrome **3058.03-** Satin White **3058.13-** Satin Nickel **3058.25**- Satin Black

3057

ALC 3" Small LED Pendant

9 ¼" н x 3" dia

Canopy: ½" H x 4 ½" DIA W/10' Adjustable Cord LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3057.01- Polished Chrome **3057.03-** Satin White **3057.13-** Satin Nickel **3057.25-** Satin Black

How to Order p.242-243







PENDANTS

3055

ALC 2" Small LED Pendant 10" h x 2" dia

Canopy: ½" H x 4 ½" DIA W/10' Adjustable Cord LED: 10W, 1060 Lumens (800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3055.01- Polished Chrome **3055.03-** Satin White **3055.13-** Satin Nickel **3055.25-** Satin Black

3056

16" h x 2" dia

ALC 2" Tall LED Pendant

Canopy: ½" H x 4 ½" DIA W/10' Adjustable Cord LED: 10W, 1060 Lumens (800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3056.01- Polished Chrome **3056.03-** Satin White **3056.13-** Satin Nickel **3056.25-** Satin Black

3050

ALC 2" One-Sided LED Sconce

2" dia x 6 ½" h Extension: 3 1/2" Wall Plate: 4 ½" DIA X ½" D LED: 20W, 1060 Lumens (800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3050.01-	Polished Chrome
3050.03-	Satin White
3050.13-	Satin Nickel
3050.25-	Satin Black

3051

ALC 2" Two-Sided LED Sconce

2" dia x 6 ½" h Extension: 3 1/2" Wall Plate: 4 1/2" DIA X 1/2" D LED: (2) 20W (total), 2120 Lumens (1600 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3051.01-	-	Polished Chrome
3051.03-	-	Satin White
3051.13-	-	Satin Nickel
3051.25-	-	Satin Black

Wall Plate: 4 ½" DIA X ½" D LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3052

3" dia x 6 ½" h

Extension: 4 1/4"

ALC 3" One-Sided LED Sconce

8052.01-	Polished Chron
3052.03-	Satin White
8052.13-	Satin Nickel
3052.25-	Satin Black

3053

ALC 3" Two-Sided LED Sconce

3" dia x 8" h Extension: 4 1/4" Wall Plate: 4 1/2" DIA X 1/2" D LED: (2) 40W (total), 4210 Lumens (2800 Net Lumens) Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) and


Standard (TRIAC) Incandescent at 120VAC, or 0-10V ADA

3053.01-	-	Polished Chrome
3053.03-	-	Satin White
3053.13-	-	Satin Nickel
3053.25-	-	Satin Black

How to Order p.242-243



SCONCES

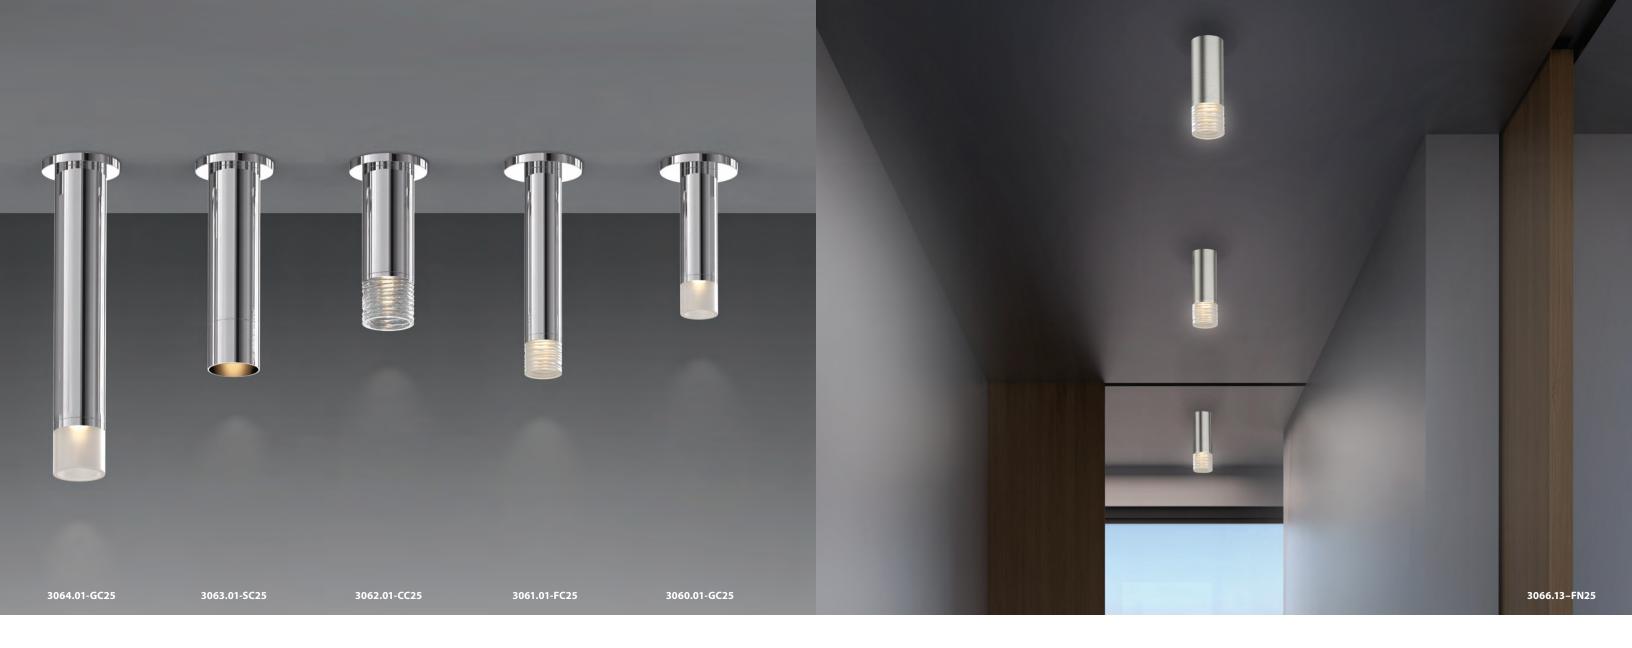



SURFACE MOUNTS

3064

ALC 3" Tall LED Surface Mount

15 1/4" H X 3" DIA Canopy: ½" H x 4 ½" DIA LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3064.01- Polished Chrome **3064.03-** Satin White **3064.13-** Satin Nickel **3064.25-** Satin Black

(1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3063.01- Polished Chrome **3063.03-** Satin White **3063.13-** Satin Nickel **3063.25**- Satin Black

3063

ALC 3" Medium LED Surface Mount

9 1/4" H X 3" DIA 6 ½" H x 3" DIA Canopy: ½" H x 4 ½" DIA LED: 20W, 2110 Lumens

3062.01- Polished Chrome **3062.03-** Satin White **3062.13-** Satin Nickel **3062.25**- Satin Black

3062

ALC 3" Small LED Surface Mount

Canopy: 1/2" H x 4 1/2" DIA LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3061

ALC 2" Tall LED Surface Mount

10" h x 2" dia Canopy: 1/2" H x 4 1/2" DIA LED: 10W, 1060 Lumens (800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3061.01- Polished Chrome **3061.03-** Satin White **3061.13-** Satin Nickel **3061.25**- Satin Black

3060

ALC 2" Small LED Surface Mount

6 ½" H X 2" DIA Canopy: 1/2" H x 4 1/2" DIA LED: 10W, 1060 Lumens (800 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3060.01- Polished Chrome **3060.03-** Satin White **3060.13-** Satin Nickel **3060.25**- Satin Black

ALC 3" Small LED Conduit Mount 6 ½" H X 3" DIA LED: 20W, 2110 Lumens

3066

(1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage

3066.01- Polished Chrome **3066.03-** Satin White **3066.13-** Satin Nickel **3066.25-** Satin Black

3067

ALC 3" Medium LED Conduit Mount

9 ¼" н x 3" dia LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage

3067.01- Polished Chrome **3067.03-** Satin White **3067.13-** Satin Nickel **3067.25-** Satin Black

3068

ALC 3" Tall LED Conduit Mount

15 1/4" H X 3" DIA LED: 20W, 2110 Lumens (1400 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent (ELV) or Standard (TRIAC) Incandescent (ELV) or Standard (TRIAC) Incandescent

> **3068.01-** Polished Chrome **3068.03-** Satin White **3068.13-** Satin Nickel **3068.25-** Satin Black

How to Order p.242-243

How to Order p.242-243



ALC® SPECIFICATIONS: how to order

ARCHITECTURAL LIGHTING CYLINDERS

A classic modern architectural lighting form, Architectural Lighting Cylinders are available in a variety of sizes, configurations, and finishes, with multiple beam spread options and a number of glass and metal trims. Used singularly, in clusters, or in an aligned arrangement, ALC offers limitless possibilities to express individual style and unique creativity.

ALC CYLINDERS 3060 3062 3066 3051 3061 3063 3067 3057 3055 3064 3068 3056 3058 3052 3053 3059

ALC TRIMS



ALC FINISHES


Cylinder Finishes

- **.01** Polished Chrome
- .03 Satin White
- .13 Satin Nickel
- .25 Satin Black

Trim Finishes

- **C** Polished Chrome
- **W** Satin White
- N Satin Nickel
- **K** Satin Black


ALC BEAM SPREADS



ALC® SPECIFICATIONS: how to order


The ALC system extends through a range of configurations, including pendant, surface-, and wall-mounted fixtures in a variety of lighting and finish options.

ALC ITEM NUMBER - One-Sided LED Sconces, Pendants, Surface Mounts

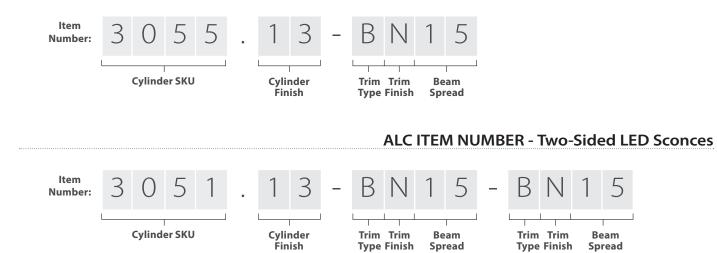

Build your item number as shown above, by selecting from left to right the desired option from each column. Note that ALC two-sided LED sconces require an additional extension as indicated. For help selecting configurations, contact our Contract Sales team at contract@sonneman.com.

Cylinder SKU	Cylinder Finish	Trim Type	Trim Finish	Beam Spread
3050 2" One-Sided LED Sconce	01 Polished Chrome	B Bezel	C Polished Chrome	15 15° Spot
3051 2" Two-Sided LED Sconce	03 Satin White	S Snoot	W Satin White	25 25° Narrow Flood
3052 3" One-Sided LED Sconce	13 Satin Nickel	G Etched Glass	N Satin Nickel	35 35° Medium Flood
3053 3" Two-Sided LED Sconce	25 Satin Black	C Clear Ribbon Glass	K Satin Black	55 55° Wide Flood
3055 2" Small LED Pendant		F Etched Ribbon Glass		
3056 2" Tall LED Pendant				
3057 3" Small LED Pendant				
3058 3" Medium LED Pendant				
3059 3" Tall LED Pendant				
3060 2" Small LED Surface Mount				
3061 2" Tall LED Surface Mount				
3062 3" Small LED Surface Mount				
3063 3" Medium LED Surface Mount				
3064 3" Tall LED Surface Mount				
3066 3" Small LED Conduit Mount				
3067 3" Medium LED Conduit Mount				
3068 3" Tall LED Conduit Mount				

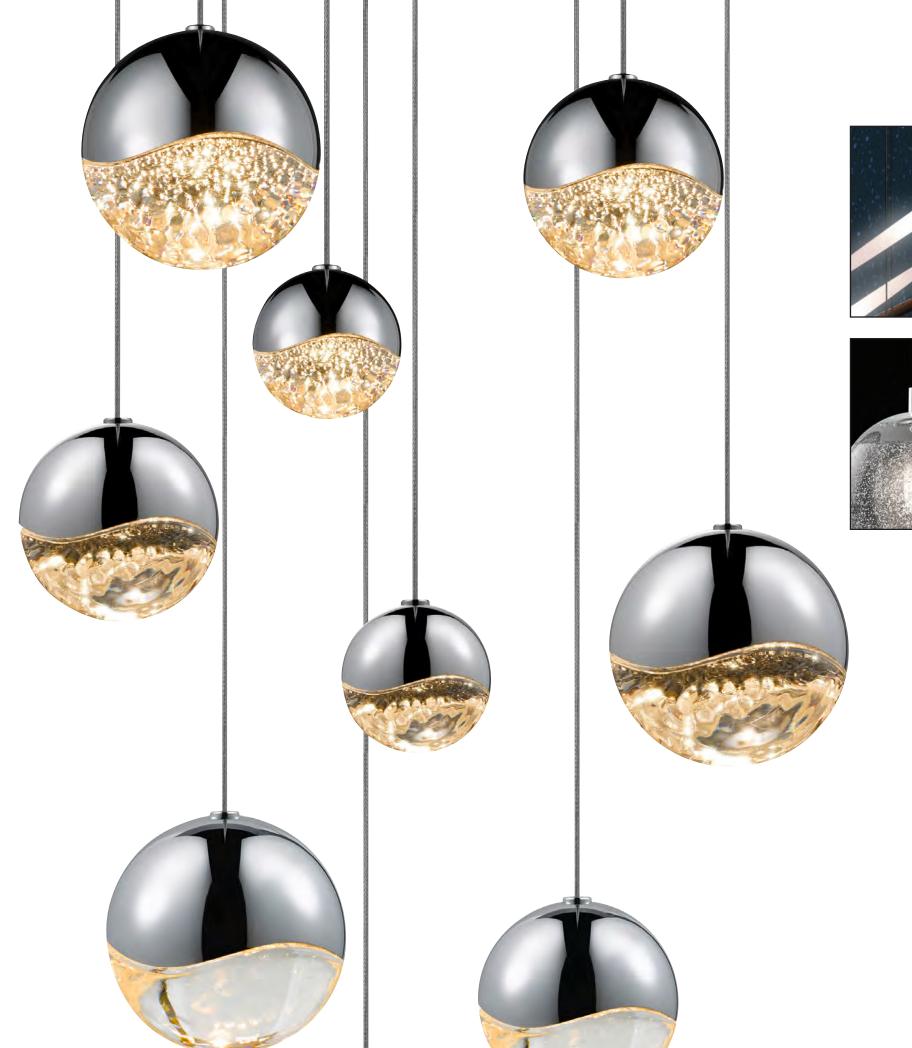











multi-forms

Multi-forms are lighting compositions of multiple elements, often composed of abstract or geometrically shaped glass or metal pendants of singular or multiple sizes. Created to be used in a variety of configurations, Multi-form configurations create scalable, dazzling, luminous arrangements of exquisite variety, shapes, and sizes.



3073

Mela Large LED Pendar

Meld Large LED Periodit

15" H x 13 ¾" DIA

Shade: Dichroic Glass w/Frosted Acrylic

Canopy: ¾" H x 4 ½" DIA w/6' Adjustable Cord

LED: 10W, 840 Lumens (590 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or

Standard (TRIAC) Incandescent

3073.25 Satin Black

3072

50, 2

Shade: Dichroic Glass w/Frosted Acrylic
Canopy: ¾" H x 4 ½" DIA w/6' Adjustable Cord
LED: 10W, 840 Lumens (590 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) o
Standard (TRIAC) Incandescent

3072.25 Satin Black

3071

Mela Small LED Pendar

Neta Stridil LED Periodill
7 ½" H x 7" DIA
Shade: Dichroic Glass w/Frosted Acrylic
Canopy: ¾" H x 4 ½" DIA w/6' Adjustable Cord
LED: 10W, 840 Lumens (590 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or
Standard (TRIAC) Incandescent

3071.25 Satin Black

mela™

Mela is an apple-like shape of softly dichroic blown glass that surrounds a luminous LED core of white etched acrylic.





mela"



3074

Neld 3-Light LED Periodit
30" H x 20" DIA
Shade: Dichroic Glass w/Frosted Acrylic
11 ½" H x 10 ¼" DIA
Canopy: 1 ¼" H x 12" DIA w/6' Adjustable Cords
LED: (3) 30W (total), 2600 Lumens (1820 Net Lumens)
Warm White (3000K), 90 CRI
120-277VAC Input w/LED Driver in Canopy
Dimmable by Electronic Low Voltage (ELV) and
Standard (TRIAC) Incandescent at 120VAC, or 0-10V

3074.25 Satin Black







cantina

2990-LRG

Cantina Large LED Pendant 18 ¾" H × 15" W × 4 ½" D

Shade: Glass

14 ¾" H x 15" W x 4 ½" D

Canopy: 3/4" H x 5" DIA W/10' Adjustable Cord Bulb: (1) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2990.25C-LRG Satin Black w/Clear Glass **2990.25K-LRG** Satin Black w/Smoke Fade Glass **2990.25K-MED** Satin Black w/Smoke Fade Glass **2990.25K-SML** Satin Black w/Smoke Fade Glass **2990.25W-LRG** Satin Black w/Poured White Glass **2990.25W-MED** Satin Black w/Poured White Glass **2990.25W-SML** Satin Black w/Poured White Glass

options of clear, smoke fade, and poured white.

2990-MED

Cantina Medium LED Pendant

14" H x 12" W x 3 ¾" D Shade: Glass

11 ¾" H x 12" W x 3 ¾" D

Canopy: 3/4" H x 5" DIA W/10' Adjustable Cord Bulb: (1) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2990.25C-MED Satin Black w/Clear Glass

2990-SML

Cantina Small LED Pendant

11 ¼" н x 9" w x 3" p Shade: Glass

Cantina is an object of kinetic art that can be hung individually, in multiples, or with spreaders to form larger diameter arrangements. Available in three sizes with glass

9" H x 9" W x 3" D

Canopy: ¾" H x 5" DIA W/10' Adjustable Cord Bulb: (1) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2990.25C-SML Satin Black w/Clear Glass









A flask-like flat oval glass profile, suspended from a slender cable, rotates randomly to various orientations creating an asymmetric relationship to its surroundings. A single point source of LED illumination within the void of the larger glass volume creates a special aesthetic tension of scales.

cantina

2995

Cantina 3-Light Tri-Spreader LED Pendant

12" to 19 1/4" H x 30" to 36" DIA Shade: Glass

9" н x 9" w x 3" d (for -SML option) 11 ¾" H X 12" W X 3 ¾" D (for -MED option) 14 ½" H x 15" w x 4 ½" D (for -LRG option) Canopy: 1 1/4" H x 6" DIA W/10' Adjustable Cords Bulb: (3) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2995.25C-SML Satin Black w/Small Clear Glass 2995.25K-SML Satin Black w/Small Smoke Fade Glass 2995.25W-SML Satin Black w/Small Poured White Glass 2995.25C-MED Satin Black w/Med. Clear Glass 2995.25K-MED Satin Black w/Med. Smoke Fade Glass **2995.25W-MED** Satin Black w/Med. Poured White Glass **2995.25C-LRG** Satin Black w/Large Clear Glass 2995.25K-LRG Satin Black w/Large Smoke Fade Glass 2995.25W-LRG Satin Black w/Large Poured White Glass

2996

Cantina 6-Light Tri-Spreader LED Pendant

14 ¾" H x 42" DIA Shade: Glass

(3) 9" H x 9" W x 3" D (3) 11 ³/₄" H x 12" W x 3 ³/₄" D

Canopy: 1 1/4" H x 6" DIA W/10' Adjustable Cords Bulb: (6) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2996.25C Satin Black w/Clear Glass 2996.25K Satin Black w/Smoke Fade Glass 2996.25W Satin Black w/Poured White Glass

2997

Cantina 9-Light Tri-Spreader LED Pendant

19 1/4" H x 57" DIA Shade: Glass

(3) 9" H X 9" W X 3" D

(3) 11 ³/₄" H x 12" W x 3 ³/₄" D

(3) 14 ½" H x 15" W x 4 ½" D

Canopy: 1 1/4" H x 6" DIA W/10' Adjustable Cords Bulb: (9) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2997.25C Satin Black w/Clear Glass **2997.25K** Satin Black w/Smoke Fade Glass **2997.25W** Satin Black w/Poured White Glass





liquid

2981

Liquid Large 3-Light Round LED Pendant 22" H x 22 ½" DIA

Shade: Glass

18" H X 10 ½" DIA Canopy: ¾" H X 15" DIA W/10' Adjustable Cables

Bulb: (3) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2981.25C Satin Black w/Clear Glass **2981.25K** Satin Black w/Smoke Fade Glass **2981.25W** Satin Black w/Poured White Glass

2980

Liquid Large LED Pendant 22" H x 10 1/2" DIA

Shade: Glass

18" H X 10 ½" DIA Canopy: ¾" H X 5" DIA W/10' Adjustable Cable Bulb: (1) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2980.25C Satin Black w/Clear Glass **2980.25K** Satin Black w/Smoke Fade Glass **2980.25W** Satin Black w/Poured White Glass Liquid pendants are available in clear, smoke fade, and poured white glass. They can be hung individually, in multiples, or with spreaders to form larger arrangements.

liquid The surface contours of this meteor-like glass volume have the softened look of melting glass. The visual weight of this amorphous sculpture is glorified by the thinness of the cable from which it hangs and the single point source of LED illumination within its contoured volume. 2973 Liquid 3-Light Linear Spreader LED Pendant 11 1/2" H x 36 1/2" W x 6" D Shade: Glass 9 34" H X 6" DIA Canopy: ¾" H x 8" W x 5" D W/10' Adjustable Cords Bulb: (3) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV) 2973.25K Satin Black w/Clear Glass 2973.25K Satin Black w/Smoke Fade Glass 2973.25W Satin Black w/Poured White Glass 2973.25W



2970

Liquid LED Pendant

10 3/4" H X 6" DIA Shade: Glass

9 34" H x 6" DIA Canopy: 3/4" H x 5" DIA W/10' Adjustable Cord Bulb: (1) 3W, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2970.25C Satin Black w/Clear Glass **2970.25K** Satin Black w/Smoke Fade Glass **2970.25W** Satin Black w/Poured White Glass Shade: Glass 9 ¾" H X 6" DIA

Canopy: ¾" H x 10" DIA W/10' Adjustable Cords Bulb: (3) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2971.25C Satin Black w/Clear Glass **2971.25K** Satin Black w/Smoke Fade Glass **2971.25W** Satin Black w/Poured White Glass 2971.25C







liquid

2977

Liquid 9-Light Tri-Spreader LED Pendant 11 1/2" H x 51" DIA

Shade: Glass

9 34" H X 6" DIA

Canopy: 1 1/4" H X 6" DIA W/10' Adjustable Cords Bulb: (9) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2977.25C Satin Black w/Clear Glass **2977.25K** Satin Black w/Smoke Fade Glass **2977.25W** Satin Black w/Poured White Glass

2975

Liquid 3-Light Tri-Spreader LED Pendant 11 ½" H x 27" DIA

Shade: Glass

9 ¾" H X 6" DIA

Canopy: 1 1/4" H X 6" DIA W/10' Adjustable Cords Bulb: (3) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2975.25C Satin Black w/Clear Glass **2975.25K** Satin Black w/Smoke Fade Glass **2975.25W** Satin Black w/Poured White Glass

2976


Liquid 6-Light Tri-Spreader LED Pendant 11 ½" H x 39 ¼" DIA

Shade: Glass

9 ¾" H X 6" DIA

Canopy: 1 1/4" H x 6" DIA W/10' Adjustable Cords Bulb: (6) 3W, G4 Base LED Bulb (included) 200 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Canopy Dimmable by Electronic Low Voltage (ELV)

2976.25C Satin Black w/Clear Glass **2976.25K** Satin Black w/Smoke Fade Glass **2976.25W** Satin Black w/Poured White Glass

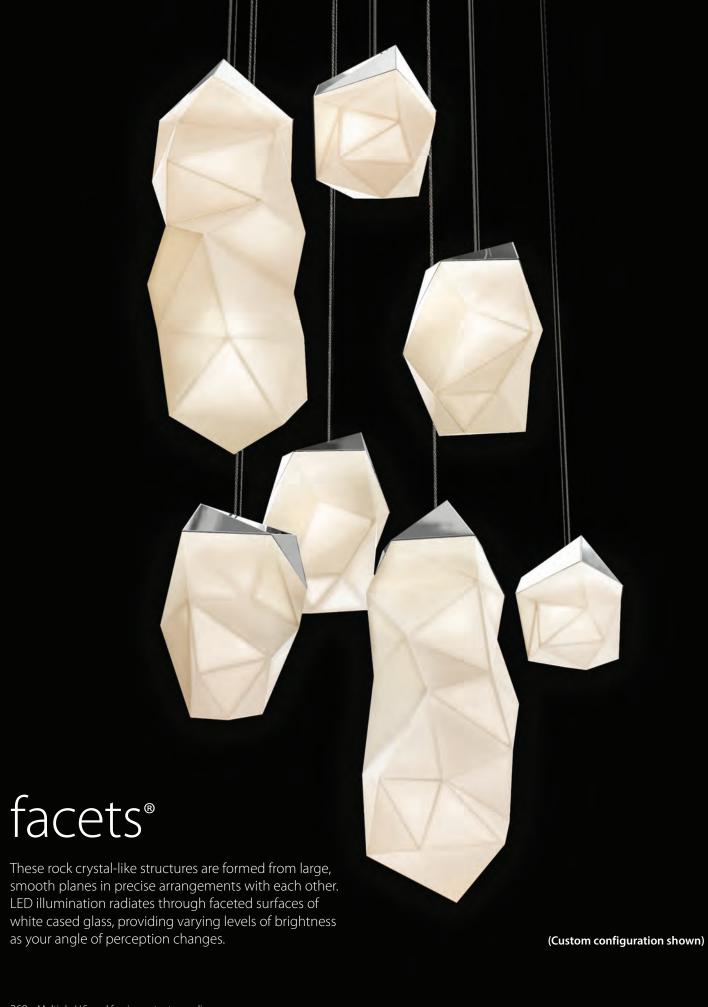







3001.13-MED





3001.13-SML

3001-SML

Facets Small LED Pendant

7 ¼" h x 7" dia

Shade: White Etched Cased Glass 4 3/4" H X 7" DIA

Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord LED: 10W, 1070 Lumens (500 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3001.01-SML Polished Chrome 3001.13-SML Satin Nickel

3001-MED

Facets Medium LED Pendant

11 ¼" H x 7" DIA

Shade: White Etched Cased Glass 8 ¾" H X 7" DIA Canopy: ½" H x 4 ½" DIA W/10' Adjustable Cord

LED: 10W, 1070 Lumens (500 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3001.01-MED Polished Chrome **3001.13-MED** Satin Nickel

3001-LRG

Facets Large LED Pendant

21 ¾" H x 7 ¾" DIA

Shade: White Etched Cased Glass 19 1/4" h x 7 3/4" dia

Canopy: ½" H x 4 ½" DIA w/10' Adjustable Cord LED: 10W, 1070 Lumens (500 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or

Standard (TRIAC) Incandescent **3001.01-LRG** Polished Chrome 3001.13-LRG Satin Nickel





3003

Facets 3-Light Round LED Pendant

7 1/4" - 21 3/4" H x 12" - 15" DIA Shade: White Etched Cased Glass

(1) 4 34" H x 7" DIA - SML

(1) 8 3/4" H X 7" DIA - MED

(1) 19 1/4" H x 7 3/4" DIA - LRG

or (3) for -SML, -MED, -LRG options

Canopy: 1 1/4" H x 12" DIA W/10' Adjustable Cord LED: (3) 30W (total), 3210 Lumens (1500 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) or

Standard (TRIAC) Incandescent

3003.01-AST Polished Chrome

3003.01-LRG Polished Chrome

3003.01-MED Polished Chrome

3003.01-SML Polished Chrome

3003.13-AST Satin Nickel

3003.13-LRG Satin Nickel

3003.13-MED Satin Nickel

3003.13-SML Satin Nickel

3005

Facets 5-Light Round LED Pendant

7 ¼" - 21 ¾" H x 17 ½" - 18" DIA Shade: White Etched Cased Glass

(2) 4 3/4" H x 7" DIA - SML

(2) 8 3/4" H X 7" DIA - MED (1) 19 1/4" H x 7 3/4" DIA - LRG

or (5) for -SML, -MED, -LRG options

Canopy: 1 1/4" H x 15" DIA w/10' Adjustable Cord

LED: (5) 50W (total), 5350 Lumens (2500 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3005.01-AST Polished Chrome **3005.01-LRG** Polished Chrome

3005.01-MED Polished Chrome **3005.01-SML** Polished Chrome **3005.13-AST** Satin Nickel

3005.13-LRG Satin Nickel

3005.13-MED Satin Nickel **3005.13-SML** Satin Nickel







2894

Ballet 9-Light Spreader LED Pendant 3 $\frac{1}{4}$ " H x 21 $\frac{1}{4}$ " DIA

Shade: Aluminum w/Frosted Acrylic 18" L x 1" dia

Canopy: 1 ½" H x 8"DIA W/6' Adjustable Cords LED: (9) 41W (total), 5540 Lumens (3880 Net Lumens)

Warm White (3000K), 90 CRI 120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2894.16 Bright Satin Aluminum **2894.25** Satin Black

2896

Ballet 13-Light Spreader LED Pendant 3 $\frac{1}{4}$ " H x 27 $\frac{1}{4}$ " DIA

Shade: Aluminum w/Frosted Acrylic 18" L X 1" DIA

Canopy: 1 ½" H x 8" DIA w/6' Adjustable Cords LED: (13) 55W (total), 7730 Lumens (5410 Net Lumens)

Warm White (3000K), 90 CRI 120-277VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2896.16 Bright Satin Aluminum **2896.25** Satin Black

ballet™

Poised in opposing positions, softly tapered acrylic forms radiate LED illumination. Asymmetrically counterbalanced, these double-tapered elements are arranged in a symmetrical cluster to form a dazzling luminous dance of interactivity – suspending from a single multi-arm canopy or mounting individually to the ceiling, allowing for scaling of the diameter of the fixture.







ballet™

2893

Ballet 9-Light Swag LED Pendant 3 ¼" H x 21 ¼" DIA Shade: Aluminum w/Frosted Acrylic 18" L x 1" dia

Canopy: 1 ¾" H x 12" DIA W/10' Adjustable Cords LED: (9) 41W (total), 5540 Lumens

(3880 Net Lumens)
Warm White (3000K), 90 CRI
120-277VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2893.16 Bright Satin Aluminum **2893.25** Satin Black

2895

Ballet 13-Light Swag LED Pendant 3 ¼" H X 27 ¼" DIA Shade: Aluminum w/Frosted Acrylic

18" L x 1" DIA

Canopy: 1 34" H x 12" DIA w/10' Adjustable Cords

LED: (13) 55W (total), 7730 Lumens

(5410 Net Lumens)
Warm White (3000K), 90 CRI
120-277VAC Input w/LED Driver in Canopy Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V

2895.16 Bright Satin Aluminum **2895.25** Satin Black





ballet™


2897

Ballet 24-Light Swag LED Pendant
3 ¼" H x 48 ½" DIA
Shade: Aluminum w/Frosted Acrylic
18" L x 1" DIA
Canopy: 1 ¾" H x 14" DIA w/10' Adjustable Cords
LED: (24) 110W (total), 14780 Lumens (10340 Net Lumens)
Warm White (3000K), 90 CRI
120-277VAC Input w/(2) LED Driver in Canopy
Dimmable by Electronic Low Voltage (ELV) and Standard
(TRIAC) Incandescent at 120VAC, or 0-10V

2897.16 Bright Satin Aluminum **2897.25** Satin Black

MULTI-FORMS | SONNEMAN 269



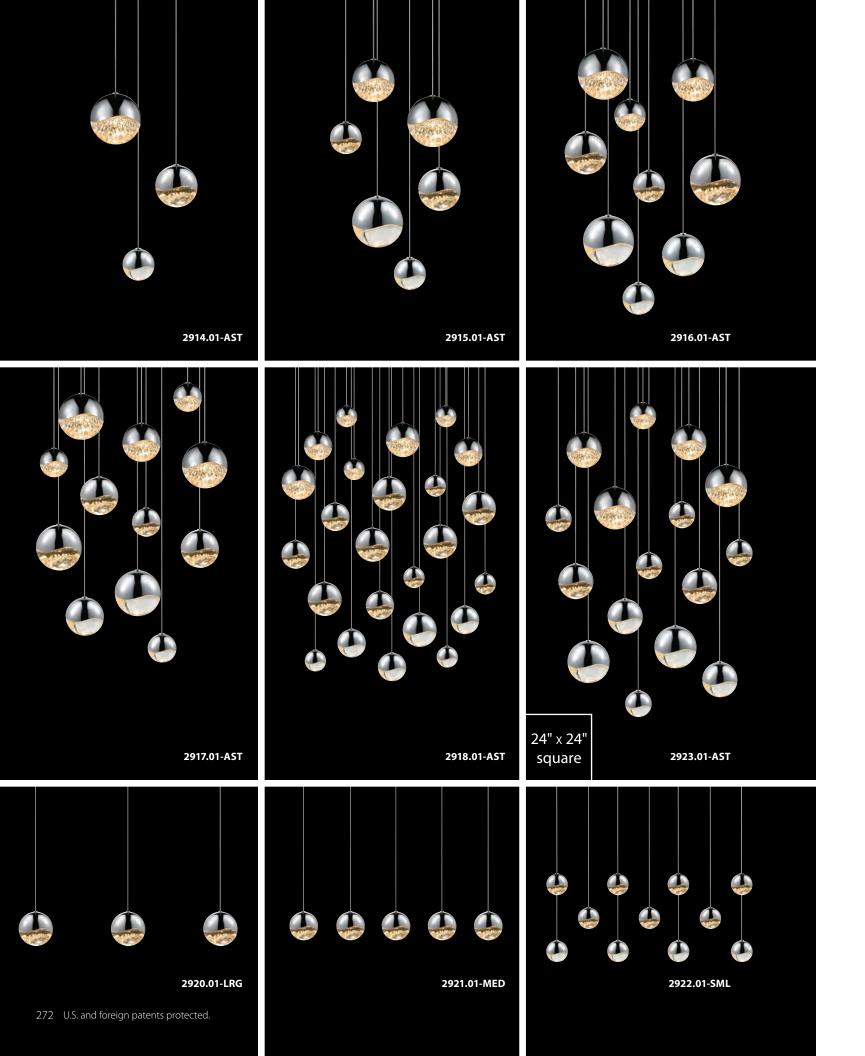







2913.01-LRG

grapes®

FIXTURE CONFIGURATIONS WITH ASSORTED CHROME GRAPES SIZES

2913-SML

Grapes Small LED Pendant w/Round Canopy

2 ½" н x 2 ½" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 3W. 150 Lumens

2913.01-SML Polished Chrome w/Clear Glass **2913.13-SML** Satin Nickel w/White Glass

2914

Grapes 3-Light Round Assorted LED Pendant

3 34" H X 8 1/4" DIA

Canopy: 6" DIA W/10' Adjustable Cords LED (3): 12.5W total, 675 Lumens

Includes (1) Small, (1) Medium, (1) Large Grape

2914.01-AST Polished Chrome w/Clear Glass **2914.13-AST** Satin Nickel w/White Glass

2917

Grapes 12-Light Round Assorted LED Pendant

3 ¾" H x 17" DIA

Canopy: 15" DIA W/10' Adjustable Cords LED (12): 50W total, 2700 Lumens

Includes (4) Small, (4) Medium, (4) Large Grapes

2917.01-AST Polished Chrome w/Clear Glass **2917.13-AST** Satin Nickel w/White Glass

Grapes 5-Light Rectangle Medium LED Pendant

3 ¼" H x 37 ¼" W x 3 ¼" D Canopy: 36" x 5" w/10' Adjustable Cords LED (5): 20W total, 1125 Lumens

Includes (5) Medium Grapes

2921.01-MED Polished Chrome w/Clear Glass **2921.13-MED** Satin Nickel w/White Glass

Additional Configurations, p.281

2913-MED

Grapes Medium LED Pendant w/Round Canopy

3 1/4" H x 3 1/4" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 4W. 225 Lumens

2913.01-MED Polished Chrome w/Clear Glass **2913.13-MED** Satin Nickel w/White Glass

2915

Grapes 6-Light Round Assorted LED Pendant

3 34" H x 11 34" DIA Canopy: 10" DIA W/10' Adjustable Cords LED (6): 25W total, 1350 Lumens

Includes (2) Small, (2) Medium, (2) Large Grapes

2915.01-AST Polished Chrome w/Clear Glass **2915.13-AST** Satin Nickel w/White Glass

2918

Grapes 24-Light Round Assorted LED Pendant 3 34" H x 27" DIA

Canopy: 25" DIA w/10' Adjustable Cords LED (24): 100W total, 5400 Lumens

Includes (8) Small, (8) Medium, (8) Large Grapes

2918.01-AST Polished Chrome w/Clear Glass **2918.13-AST** Satin Nickel w/White Glass

2922

Grapes 11-Light Rectangle Small LED Pendant

2 ½" H x 36 ¼" w x 8 ½" D Canopy: 36" x 8" w/10' Adjustable Cords LED (11): 33W total, 1650 Lumens

Includes (11) Small Grapes

2922.01-SML Polished Chrome w/Clear Glass **2922.13-SML** Satin Nickel w/White Glass

LED Specifications:

Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

2913-LRG

Grapes Large LED Pendant w/Round Canopy

3 34" H X 3 34" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 5.5W. 300 Lumens

2913.01-LRG Polished Chrome w/Clear Glass **2913.13-LRG** Satin Nickel w/White Glass

2916

Grapes 9-Light Round Assorted LED Pendant

3 34" H x 13 34" DIA

Canopy: 12" DIA W/10' Adjustable Cords LED (9): 37.5W total, 2025 Lumens

Includes (3) Small, (3) Medium, (3) Large Grapes

2916.01-AST Polished Chrome w/Clear Glass **2916.13-AST** Satin Nickel w/White Glass

Grapes 3-Light Rectangle Large LED Pendant

3 ¾" H x 37 ¾" W x 3 ¾" D

Canopy: 36" x 5" w/10' Adjustable Cords LED (3): 16.5W total, 900 Lumens

Includes (3) Large Grapes

2920.01-LRG Polished Chrome w/Clear Glass **2920.13-LRG** Satin Nickel w/White Glass

2923

Grapes 16-Light Square Assorted LED

3 ¾" H X 23 ¾" W X 23 ¾" D Canopy: 24" sq w/10' Adjustable Cords LED (16): 64W total, 3450 Lumens

Includes (6) Small, (6) Medium, (4) Large Grapes


2923.01-AST Polished Chrome w/Clear Glass 2923.13-AST Satin Nickel w/White Glass







MULTI-FORMS | SONNEMAN° 275

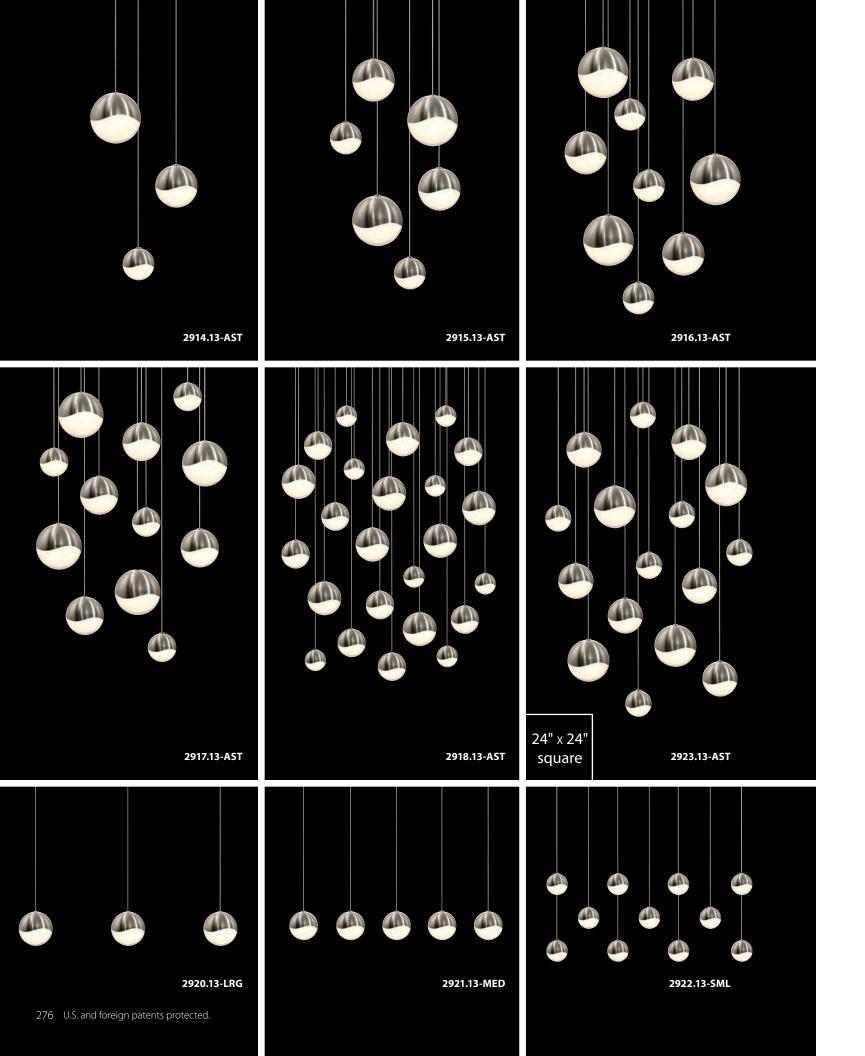







2913.13-LRG

grapes®

FIXTURE CONFIGURATIONS WITH ASSORTED SATIN NICKEL GRAPES SIZES

2913-SML

Grapes Small LED Pendant w/Round Canopy

2 ½" H X 2 ½" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 3W. 150 Lumens

2913.01-SML Polished Chrome w/Clear Glass **2913.13-SML** Satin Nickel w/White Glass

2914

Grapes 3-Light Round Assorted LED Pendant

3 34" H X 8 1/4" DIA

Canopy: 6" DIA W/10' Adjustable Cords LED (3): 12.5W total, 675 Lumens

Includes (1) Small, (1) Medium, (1) Large Grape

2914.01-AST Polished Chrome w/Clear Glass **2914.13-AST** Satin Nickel w/White Glass

2917

Grapes 12-Light Round Assorted LED Pendant

3 ¾" H x 17" DIA

Canopy: 15" DIA W/10' Adjustable Cords LED (12): 50W total, 2700 Lumens

Includes (4) Small, (4) Medium, (4) Large Grapes

2917.01-AST Polished Chrome w/Clear Glass **2917.13-AST** Satin Nickel w/White Glass

Grapes 5-Light Rectangle Medium LED Pendant 3 ¼" H x 37 ¼" W x 3 ¼" D

Canopy: 36" x 5" w/10' Adjustable Cords LED (5): 20W total, 1125 Lumens

Includes (5) Medium Grapes

2921.01-MED Polished Chrome w/Clear Glass **2921.13-MED** Satin Nickel w/White Glass

Additional Configurations, p.281

2913-MED

Grapes Medium LED Pendant w/Round Canopy

3 1/4" H x 3 1/4" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 4W. 225 Lumens

2913.01-MED Polished Chrome w/Clear Glass **2913.13-MED** Satin Nickel w/White Glass

2915

Grapes 6-Light Round Assorted LED Pendant

3 34" H X 11 34" DIA Canopy: 10" DIA W/10' Adjustable Cords

LED (6): 25W total, 1350 Lumens

Includes (2) Small, (2) Medium, (2) Large Grapes

2915.01-AST Polished Chrome w/Clear Glass **2915.13-AST** Satin Nickel w/White Glass

2918

Grapes 24-Light Round Assorted LED Pendant 3 34" H x 27" DIA

Canopy: 25" DIA w/10' Adjustable Cords LED (24): 100W total, 5400 Lumens

Includes (8) Small, (8) Medium, (8) Large Grapes

2918.01-AST Polished Chrome w/Clear Glass **2918.13-AST** Satin Nickel w/White Glass

2922

Grapes 11-Light Rectangle Small LED Pendant

2 ½" H x 36 ¼" w x 8 ½" D Canopy: 36" x 8" w/10' Adjustable Cords LED (11): 33W total, 1650 Lumens

Includes (11) Small Grapes

2922.01-SML Polished Chrome w/Clear Glass **2922.13-SML** Satin Nickel w/White Glass

LED Specifications:

Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

2913-LRG

Grapes Large LED Pendant w/Round Canopy

3 34" H X 3 34" DIA Shade: Glass

Canopy: 5" DIA W/10' Adjustable Cord LED: 5.5W. 300 Lumens

2913.01-LRG Polished Chrome w/Clear Glass **2913.13-LRG** Satin Nickel w/White Glass

2916

Grapes 9-Light Round Assorted LED Pendant

3 34" H x 13 34" DIA

Canopy: 12" DIA W/10' Adjustable Cords LED (9): 37.5W total, 2025 Lumens

Includes (3) Small, (3) Medium, (3) Large Grapes

2916.01-AST Polished Chrome w/Clear Glass **2916.13-AST** Satin Nickel w/White Glass

2920

Grapes 3-Light Rectangle Large LED Pendant

3 ¾" H x 37 ¾" W x 3 ¾" D

Canopy: 36" x 5" w/10' Adjustable Cords LED (3): 16.5W total, 900 Lumens

Includes (3) Large Grapes

2920.01-LRG Polished Chrome w/Clear Glass **2920.13-LRG** Satin Nickel w/White Glass

2923

Grapes 16-Light Square Assorted LED

3 ¾" H X 23 ¾" W X 23 ¾" D Canopy: 24" sq w/10' Adjustable Cords LED (16): 64W total, 3450 Lumens

Includes (6) Small, (6) Medium, (4) Large Grapes

2923.01-AST Polished Chrome w/Clear Glass

2923.13-AST Satin Nickel w/White Glass



grapes ** fixture configurations with uniform grapes sizes

1. Select canopy

SINGLE ROUND CANOPIES



2910

Grapes 1-Light Micro-Dome

Canopy: 1" H x 2" DIA 120VAC Input w/12VAC Remote Mounted Transformer

2912

Grapes 1-Light Dome

Canopy: 1 34" H x 4 1/2" DIA 120VAC Input w/12VAC Transformer in Canopy

2911

Grapes 1-Light Mini-Dome

Canopy: 4 1/4" H x 2 1/2" DIA 120VAC Input w/12VAC Transformer in Canopy with Conduit Connection

2913

Grapes 1-Light Round

Canopy: ½" H x 5" DIA 120VAC Input w/12VAC Transformer in Outlet Box

MULTIPLE ROUND CANOPIES





2917

Grapes 12-Light Round

Canopy: 15" DIA 120VAC Input w/(2) 12VAC Transformer in Canopy

2918

Grapes 24-Light Round

Canopy: 25" DIA 120VAC Input w/(3) 12VAC Transformer in Canopy



2916

Grapes 9-Light Round

Canopy: 12" DIA 120VAC Input w/(2) 12VAC Transformers in Canopy



Grapes 6-Light Round

Canopy: 10" DIA 120VAC Input w/12VAC Transformer in Outlet Box

2914

Grapes 3-Light Round

Canopy: 6" DIA 120VAC Input w/12VAC Transformer in Outlet Box

MULTIPLE RECTANGLE CANOPIES



Grapes 16-Light Square

Canopy: 24" sq 120VAC Input w/(2) 12VAC Transformer in Canopy



2922

Grapes 11-Light Rectangle

Canopy: 36" w x 8" D 120VAC Input w/(2) 12VAC Transformer in Canopy



2921

Grapes 5-Light Rectangle

Canopy: 36" w x 5" D 120VAC Input w/12VAC Transformer in Outlet Box



2920

Grapes 3-Light Rectangle

Canopy: 36" w x 5" D 120VAC Input w/12VAC Transformer in Outlet Box

grapes by the structure configurations with uniform grapes sizes



2. Select finish and size



Grapes Small LED Pendant

2 ½" H x 2 ½" DIA Shade: Glass w/10' Adjustable Cord LED: 3W, 150 Lumens Warm White (3000K), 90 CRI Dimmable by Electronic Low Voltage (ELV)

.01-SML Polished Chrome w/Clear Glass .13-SML Satin Nickel w/White Glass

Grapes Medium LED Pendant

3 ¼" H X 3 ¼" DIA Shade: Glass w/10' Adjustable Cord LED: 4W, 225 Lumens Warm White (3000K), 90 CRI Dimmable by Electronic Low Voltage (ELV)

.01-MED Polished Chrome w/Clear Glass .13-MED Satin Nickel w/White Glass

Grapes Large LED Pendant

Shade: Glass w/10' Adjustable Cord LED: 5.5W, 300 Lumens Warm White (3000K), 90 CRI Dimmable by Electronic Low Voltage (ELV)

.01-LRG Polished Chrome w/Clear Glass .13-LRG Satin Nickel w/White Glass

For custom configurations, contact customer service.



3. Build your fixture: [canopy number]. [finish-size] (eg, 2910.01-SML)

	ALL SMAL	L GRAPES	ALL MEDIUM GRAPES		ALL LARGE GRAPES	
CANOPY	Polished Chrome	Satin Nickel	Polished Chrome	Satin Nickel	Polished Chrome	Satin Nickel
1-Light Micro-Dome	2910.01-SML	2910.13-SML	2910.01-MED	2910.13-MED	2910.01-LRG	2910.13-LRG
1-Light Mini-Dome	2911.01-SML	2911.13-SML	2911.01-MED	2911.13-MED	2911.01-LRG	2911.13-LRG
1-Light Dome	2912.01-SML	2912.13-SML	2912.01-MED	2912.13-MED	2912.01-LRG	2912.13-LRG
1-Light Round	2913.01-SML	2913.13-SML	2913.01-MED	2913.13-MED	2913.01-LRG	2913.13-LRG
3-Light Round	2914.01-SML	2914.13-SML	2914.01-MED	2914.13-MED	2914.01-LRG	2914.13-LRG
6-Light Round	2915.01-SML	2915.13-SML	2915.01-MED	2915.13-MED	2915.01-LRG	2915.13-LRG
9-Light Round	2916.01-SML	2916.13-SML	2916.01-MED	2916.13-MED	2916.01-LRG	2916.13-LRG
12-Light Round	2917.01-SML	2917.13-SML	2917.01-MED	2917.13-MED	2917.01-LRG	2917.13-LRG
24-Light Round	2918.01-SML	2918.13-SML	2918.01-MED	2918.13-MED	2918.01-LRG	2918.13-LRG
3-Light Rectangle	2920.01-SML	2920.13-SML	2920.01-MED	2920.13-MED	2920.01-LRG	2920.13-LRG
5-Light Rectangle	2921.01-SML	2921.13-SML	2921.01-MED	2921.13-MED	2921.01-LRG	2921.13-LRG
11-Light Rectangle	2922.01-SML	2922.13-SML	2922.01-MED	2922.13-MED	2922.01-LRG	2922.13-LRG
16-Light Square	2923.01-SML	2923.13-SML	2923.01-MED	2923.13-MED	2923.01-LRG	2923.13-LRG


280 U.S. and foreign patents protected.





champagne bubbles

Light dances through a dazzling array of tiny bubbles within the solid mass of each glass crystal ball. A single source of LED illumination becomes refracted and diffused from within its effervescent volume. Champagne Bubbles can be hung singly or in multiple arrangements from a range of canopy sizes.



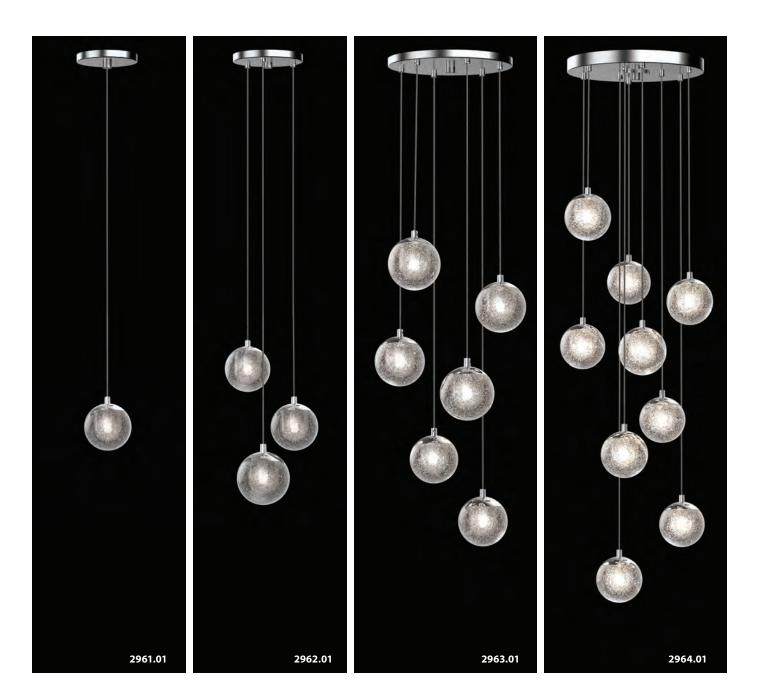

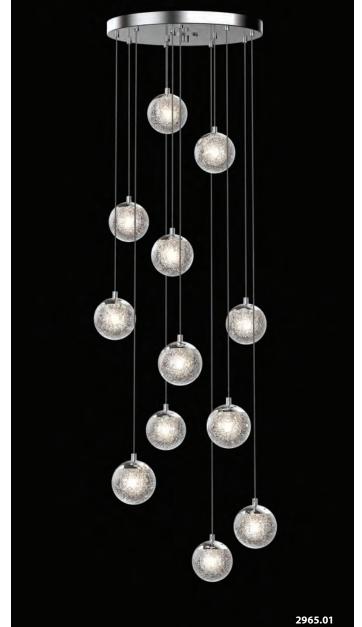

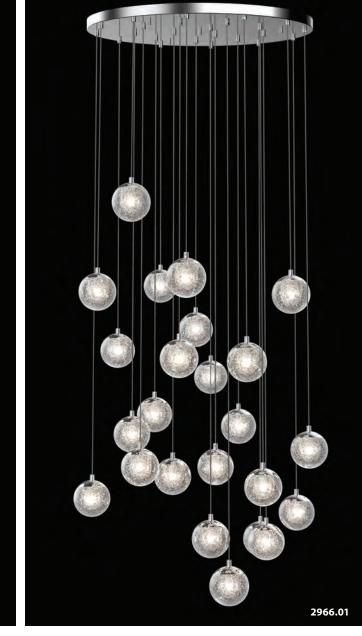

2961

Champagne Bubbles LED Pendant

4 ½" h x 4" dia Shade: Clear Seeded Glass

3 ¼" h x 4" dia Canopy: 3/4" H x 5" DIA W/10' Adjustable Cord Bulb: (1) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2961.01 Polished Chrome

2962

Champagne Bubbles 3-Light Round LED Pendant

4 1/2" H X 8 1/2" DIA Shade: Clear Seeded Glass

3 1/4" h x 4" dia

Canopy: 3/4" H X 6" DIA W/10' Adjustable Cords Bulb: (3) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2962.01 Polished Chrome

2963

Champagne Bubbles 6-Light Round LED Pendant

Shade: Clear Seeded Glass

3 1/4" h x 4" dia

Canopy: ¾" H X 10" DIA W/10' Adjustable Cords Bulb: (6) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2963.01 Polished Chrome

champagne bubbles

2964

Champagne Bubbles 9-Light Round LED Pendant

Shade: Clear Seeded Glass 3 1/4" h x 4" dia

Canopy: 1" H x 12" DIA W/10' Adjustable Cords Bulb: (9) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2964.01 Polished Chrome

2965

Champagne Bubbles 12-Light Round LED Pendant Champagne Bubbles 24-Light Round LED Pendant

Shade: Clear Seeded Glass 3 1/4" H x 4" DIA

Canopy: 1" H x 15" DIA W/10' Adjustable Cords Bulb: (12) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2965.01 Polished Chrome

2966

Shade: Clear Seeded Glass

3 ¼" h x 4" dia

Canopy: 1" H x 25" DIA W/10' Adjustable Cords Bulb: (24) 3W, G4 Base LED Bulb (included) 220 Lumens, Warm White (3000K), 90 CRI 120VAC Input w/ (2) 24VAC Transformers in Canopy Dimmable by Electronic Low Voltage (ELV)

2966.01 Polished Chrome







Spire LED Pendant w/Micro-Dome Canopy

12 ¾" H X 2" DIA Shade: Cut Crystal 5 ½" H X 2" DIA Canopy: 1" н x 2" dia w/10' Adjustable Cord LED: 4W, 300 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV)

2940.01 Polished Chrome

2941

Spire LED Pendant w/Round Canopy

12 ¾" H X 2" DIA Shade: Cut Crystal 5 ½" H X 2" DIA Canopy: 5" DIA W/10' Adjustable Cord LED: 4W, 300 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2941.01 Polished Chrome

2942

Spire 3-Light Round LED Pendant

12 34" H X 6 1/2" DIA Shade: Cut Crystal 5 ½" H X 2" DIA Canopy: 6" DIA W/10' Adjustable Cords LED: (3) 12W (total), 900 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2942.01 Polished Chrome

2947

Spire 5-Light Rectangle LED Pendant

12 ¾" H x 36" W x 5" D Shade: Cut Crystal 5 ½" H X 2" DIA Canopy: 36" x 5" w/10' Adjustable Cords LED: (5) 19W (total), 1500 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2947.01 Polished Chrome

2948

Spire 11-Light Rectangle LED Pendant

12 ¾" H x 36" W x 8" D Shade: Cut Crystal 5 ½" H X 2" DIA Canopy: 36" x 8" w/10' Adjustable Cords LED: (11) 43W (total), 3300 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2948.01 Polished Chrome

PENDANT CONFIGURATIONS





Trinity LED Pendant

w/Micro-Dome Canopy

11 ¾" H X 1 ¼" DIA Shade: Cut Crystal 8 34" H X 1 1/4" DIA Canopy: 1" H x 2" DIA w/10' Adjustable Cord LED: 4W, 270 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV)

2950.01 Polished Chrome

2951

Trinity LED Pendant

w/Round Canopy

11 34" H X 1 1/4" DIA Shade: Cut Crystal 8 ¾" H X 1 ¼" DIA Canopy: 5" DIA W/10' Adjustable Cord LED: 4W, 270 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2951.01 Polished Chrome

2952

Trinity 3-Light Round LED Pendant
11 3/4" H x 6" DIA Shade: Cut Crystal 8 34" H X 1 1/4" DIA Canopy: 6" DIA W/10' Adjustable Cords LED: (3) 11W (total), 800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2952.01 Polished Chrome

2952.01



Champagne Wands

3-Light LED Round Pendant

10 ¾" H x 7" DIA Shade: Champagne Acrylic Canopy: 8" DIA W/6' Adjustable Cords LED: (3) 8W total, 600 Lumens Warm White (3000K), 80 CRI 100-240VAC Input w/LED Driver Non-Dimmable

2253.01 Polished Chrome

2251

Champagne Wands 2-Arm LED Sconce

20 ¾" H x 5 ¼" W Shade: Champagne Acrylic Extension: 2 1/2" Wall Plate: 5 1/4" sq LED: (2) 5W total, 400 Lumens Warm White (3000K), 80 CRI 100-240VAC Input w/LED Driver Non-Dimmable

ADA

2251.01 Polished Chrome

2250

Champagne Wands

1-Arm LED Sconce

20 ¾" H X 2 ½" W Shade: Champagne Acrylic Extension: 2 1/2" Wall Plate: 4 3/4" x 2 1/2" LED: 3W, 200 Lumens Warm White (3000K), 80 CRI 100-240VAC Input w/LED Driver Non-Dimmable

ADA

2250.01 Polished Chrome

champagne wands Light dances off champagne-like bubbles infused within the LED illuminated environment of acrylic shades. These sophisticated forms can be featured individually or clustered in multiples to brighten and ornament a space with technological wonder.

Champagne Wands Champagne Wands 5-Light LED Round Pendant

10 ¾" H x 9" DIA Shade: Champagne Acrylic Canopy: 10" DIA W/6' Adjustable Cords LED: (5) 13W total, 1000 Lumens Warm White (3000K), 80 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2255.01 Polished Chrome

2255

2252

1-Light LED Pendant

10 ¾" H x 1" DIA Shade: Champagne Acrylic Canopy: 4 ½" DIA w/6' Adjustable Cord LED: 3W, 200 Lumens Warm White (3000K), 80 CRI 100-240VAC Input w/LED Driver Non-Dimmable

2252.01 Polished Chrome

A STATE OF S

2255.01

2252.01



bath notes





Bath Notes 18" LED Bath Bar

2610.23 Satin Chrome

2611

Bath Notes 24" LED Bath Bar

24" H x 5" w
Shade: Metal w/Optical Acrylic Diffuser
24" H x 5" w x 2 ½" D
Extension: 3"
Wall Plate: 23 ½" x 4 ½"
LED: 23W, 1250 Lumens (475 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

2611.01 Polished Chrome2611.03 Satin White

2611.23 Satin Chrome

2612

Bath Notes 32" LED Bath Bar

32" H x 5" w x 2 ½" D
Extension: 3"
Wall Plate: 31 ½" x 4 ½"
LED: 28W, 1575 Lumens (595 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

2612.01 Polished Chrome 2612.03 Satin White

2612.23 Satin Chrome



2613

Bath Notes 40" LED Bath Bar

40" H x 5" W

Shade: Metal w/Optical Acrylic Diffuser 40" H x 5" W x 2 1/2" D

Extension: 3"

Wall Plate: 39 1/2" x 4 1/2"

LED: 34W, 1950 Lumens (740 Net Lumens)


Warm White (3000K), 90 CRI

120VAC input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

ADA

2613.01 Polished Chrome **2613.03** Satin White

2613.23 Satin Chrome





solid glass bar

Solid Glass Bar reveals a generous yet pristine luminous edge from a white glass surface. Captured precisely within a chrome rectilinear beam, this luxury modern LED bar is ingeniously mounted to a surface by concealed magnets. Use where perfection is demanded.

2590

Solid Glass Bar 18" LED Bath Bar

18" H x 2 ¾" W Shade: Clear Glass 18" H x 2 ¾" W x ½" D Extension: 2 1/4" LED: 19W, 800 Lumens (430 Net Lumens) Warm White (3000K), 90 CRI 120VAC input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2590.01 Polished Chrome 2590.13 Satin Nickel

2592

Solid Glass Bar 24" LED Bath Bar

24" H x 2 ¾" W Shade: Clear Glass 24" H X 2 34" W X 1/2" D Extension: 2 1/4" LED: 24W, 1040 Lumens (560 Net Lumens) Warm White (3000K), 90 CRI 120VAC input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2592.01 Polished Chrome 2592.13 Satin Nickel

2594

Solid Glass Bar 32" LED Bath Bar


32" H x 2 ¾" w
Shade: Clear Glass
32" H x 2 ¾" w x ½" D
Extension: 2 ¼"
LED: 32W, 1400 Lumens (750 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

2594.01 Polished Chrome **2594.13** Satin Nickel

2594.13

crystal rods®

Aligned in pairs along a slender bar, these glass rods—in pristine frosted white or ribbed seeded crystal—radiate LED illumination from both sides of their cylindrical centers. Complex in its repetitive cadence yet simple in its linear alignment, Crystal Rods bath bar brings bright illumination and decorative interest to its setting.

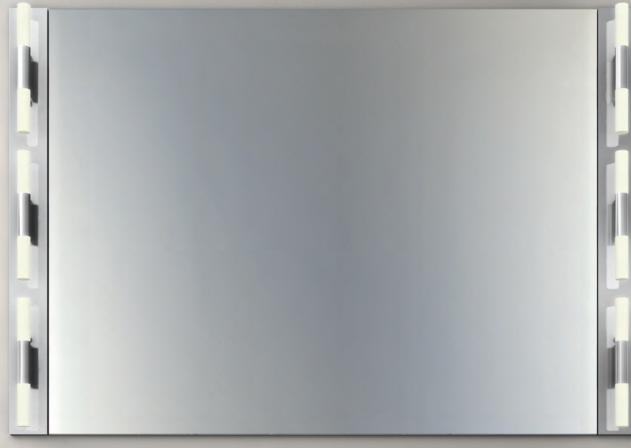

3803

Crystal Rods 6-Light LED Bath Bar

2 ½" H x 28" W Shade: Glass

2 3/4" H X 3/4" DIA

Extension: 2 1/4" Wall Plate: 28" H x 2 1/2" W x 1/2" D

LED: (6) 17W (total), 1500 Lumens (1040 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/Remote LED Driver

3803.01C Polished Chrome

w/Clear Ribbed Seeded Crystal

3803.01W Polished Chrome w/Etched Glass

3803.03C Satin White

w/Clear Ribbed Seeded Crystal

3803.03W Satin White w/Etched Glass



3803.01W

3802

Crystal Rods 4-Light LED Bath Bar

2 ½" H x 18 ¾" W Shade: Glass

2 ¾" h x ¾" dia

Extension: 2 1/4"

Wall Plate: 18 3/4" H x 2 1/2" W x 1/2" D LED: (4) 10W (total), 1000 Lumens (650 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/Remote LED Driver

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3802.01C Polished Chrome w/Clear Ribbed Seeded Crystal

3802.01W Polished Chrome w/Etched Glass

3802.03C Satin White

w/Clear Ribbed Seeded Crystal **3802.03W** Satin White w/Etched Glass

3805

Crystal Rods 10-Light LED Bath Bar

2 ½" H x 47" W Shade: Glass

2 ¾" h x ¾" dia

Extension: 2 1/4"

Wall Plate: 47" H x 2 ½" W x ½" D

LED: (10) 27W (total), 2500 Lumens (1630 Net Lumens)

Warm White (3000K), 90 CRI

120-277VAC Input w/Remote LED Driver Dimmable by Electronic Low Voltage (ELV) and Standard (TRIAC) Incandescent at 120VAC, or 0-10V


3805.01C Polished Chrome

w/Clear Ribbed Seeded Crystal

3805.01W Polished Chrome w/Etched Glass

3805.03C Satin White

w/Clear Ribbed Seeded Crystal **3805.03W** Satin White w/Etched Glass





vanity

LED MIRROR SYSTEM

Vanity LED Mirror System provides bright and even LED illumination in a compact form that enables mounting flush against a mirror or in a tight alcove. Available in a Slim 1.5" profile that provides over 500 LED lumens per foot, and a Wide 3" profile that provides an astonishing 800 LED lumens per foot.

2550

Vanity Slim Vertical LED Mirror Kit

36 ¼" н x 27" w Shade: Optical Acrylic 36 ¼" н x 1 ½" w x ¾" D Extension: 1 ¾" LED (2): 54W total, 3200 Lumens

2550.01 Polished Chrome

2542

Vanity Slim 48" LED Bath Bar

1 ½" н x 48 ¼" w Shade: Optical Acrylic Extension: 1 ¾" Wall Plate: 1 1/2" x 48" LED: 36W, 2200 Lumens

Optional 4" outlet box cover available

2542.01 Polished Chrome



2540

Vanity Slim 24" LED Bath Bar

Shade: Optical Acrylic Extension: 1 ¾" Wall Plate: 1 1/2" x 24" LED: 18W, 1100 Lumens

Optional 4" outlet box cover available

2540.01 Polished Chrome

2541

Vanity Slim 36" LED Bath Bar

Shade: Optical Acrylic Extension: 1 34" Wall Plate: 1 1/2" x 36" LED: 27W, 1600 Lumens Optional 4" outlet box cover available

2541.01 Polished Chrome

LED Specifications:

Warm White (3000K), 90 CRI, 120VAC Input w/12VAC Transformer, Dimmable by Electronic Low Voltage (ELV)



vanity

WIDE

The stand-alone Bath Bars are able to mount flush to an existing mirror installation, with the Wide profile mounting over a 2" electrical box.

2554

Vanity Wide Vertical LED Mirror Kit

36 ¼" H x 30" w Shade: Optical Acrylic 36 ¼" H x 3" w x ¾" D Extension: 1 ¾" LED (2): 80W total, 4800 Lumens ADA

2554.01 Polished Chrome

2545

Vanity Wide 48" LED Bath Bar $3" \ \mbox{H} \times 48 \ \mbox{$\frac{1}{4}$" W}$

Shade: Optical Acrylic Extension: 1 ¾" Wall Plate: 3" x 48" LED: 54W, 3200 Lumens

Optional 4" outlet box cover available

2545.01 Polished Chrome



2544

Vanity Wide 36" LED Bath Bar

3" H x 36 ¼" W Shade: Optical Acrylic Extension: 1 ¾" Wall Plate: 3" x 36" LED: 40W, 2400 Lumens

ADA

Optional 4" outlet box cover available

2544.01 Polished Chrome

LED Specifications:

Warm White (3000K), 90 CRI, 120VAC Input w/12VAC Transformer in Outlet Box, Dimmable by Electronic Low Voltage (ELV)





Stiletto 24" LED Sconce/Bath Bar 23 ¾" H X 5" W Shade: Frosted Acrylic Extension: 3 1/4" Wall Plate: 4 1/2" sq w/Adjustable Position LED: 10W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2340.03-DIM Satin White 2340.16-DIM Bright Satin Aluminum 2340.25-DIM Satin Black

2342

Stiletto 32" LED Sconce/Bath Bar 31¾" H × 5" W Shade: Frosted Acrylic Extension: 3 1/4" Wall Plate: 4 ½" sq w/Adjustable Position LED: 12W total, 1050 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2342.03-DIM Satin White **2342.16-DIM** Bright Satin Aluminum 2342.25-DIM Satin Black

WALL BAR



Stiletto Lungo 48" LED Wall Bar

%" H x 47 %" w Shade: Frosted Acrylic Extension: 1 %" LED: 16W, 1450 Lumens Warm White (3000K), 90 CRI 120VAC Input w/Remote Mounted LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

Optional 4" outlet box cover available

2330.03 Satin White2330.16 Bright Satin Aluminum2330.25 Satin Black

2332

Stiletto Lungo 60" LED Wall Bar

%" H x 59 ½" w Shade: Frosted Acrylic Extension: 1 ¾" LED: 20W, 1800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/Remote Mounted LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

Optional 4" outlet box cover available

2332.03 Satin White **2332.16** Bright Satin Aluminum **2332.25** Satin Black

2334

Stiletto Lungo 72" LED Wall Bar

%" H x 71 ½" W Shade: Frosted Acrylic Extension: 1 ¾" LED: 24W, 2150 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/Remote Mounted LED Driver Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0–10V

ADA

Optional 4" outlet box cover available

2334.03 Satin White2334.16 Bright Satin Aluminum2334.25 Satin Black

2338

Stiletto Lungo 96" LED Wall Bar

5%" H x 95" w
Shade: Frosted Acrylic
Extension: 1 ¾"
LED: 32W, 2900 Lumens
Warm White (3000K), 90 CRI
100-277VAC Input w/Remote Mounted LED Driver
Dimmable by Electronic Low Voltage (ELV),
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

ADA

Optional 4" outlet box cover available


2338.03 Satin White **2338.16** Bright Satin Aluminum **2338.25** Satin Black

stiletto lungo

Stiletto's ultra-sophisticated and extraordinarily precise solid acrylic is thrust through a minimally present aluminum channel, radiating perfectly even LED illumination from within. Stiletto Lungo mounts flush to the wall without a canopy.





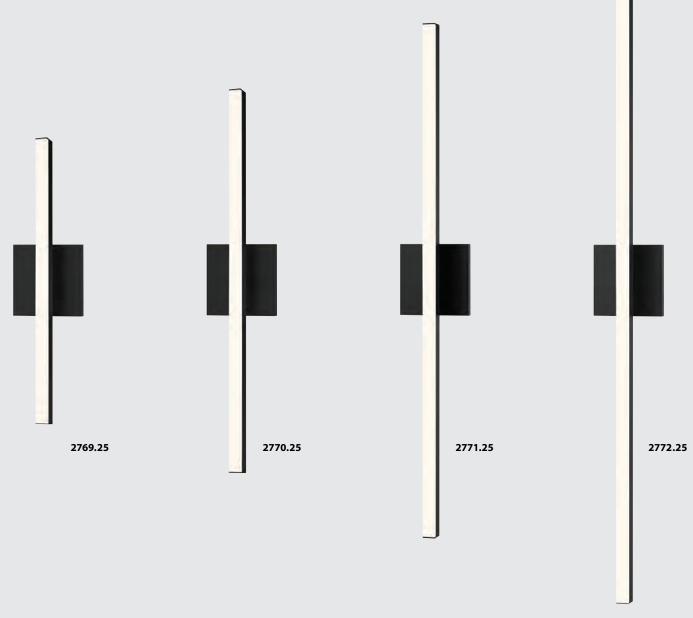

LED illumination from the most minimal geometric profile achieves the Modernist architectural ideal of "Less is more."

2769

Stix 18" LED Bath Bar

17 ¼" H x ¾" W Shade: Optical Acrylic Extension: 1 1/2" Wall Plate: 4 1/2" sq LED: 16W, 720 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2769.03 Satin White 2769.16 Bright Satin Aluminum **2769.25** Satin Black

2770

Stix 24" LED Bath Bar

24 ¾" H X ¾" W Shade: Optical Acrylic Extension: 1 1/2" Wall Plate: 4 1/2" sq LED: 21W, 1120 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2770.03 Satin White **2770.16** Bright Satin Aluminum **2770.25** Satin Black

2771

Stix 32" LED Bath Bar

32 ¼" H X ¾" W Shade: Optical Acrylic Extension: 1 1/2" Wall Plate: 4 1/2" sq LED: 30W, 1390 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2771.16 Bright Satin Aluminum

2771.03 Satin White

2771.25 Satin Black

2772

Stix 40" LED Bath Bar

40" H x ¾" W Shade: Optical Acrylic Extension: 1 1/2" Wall Plate: 4 1/2" sq LED: 35W, 1750 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2772.03 Satin White **2772.16** Bright Satin Aluminum **2772.25** Satin Black



Stix Plus 48" LED Wall Bar

49" w x ¾" H Shade: Optical Acrylic Extension: 1" LED: 40W, 2090 Lumens Warm White (3000K), 90 CRI

120VAC Input w/12VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV)

ADA Optional 4" outlet box cover available

2790.03 Satin White **2790.16** Bright Satin Aluminum

2790.25 Satin Black

2791

Stix Plus 60" LED Wall Bar

60 ¾" w x ¾" н Shade: Optical Acrylic Extension: 1" LED: 44W, 2660 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV) ADA

Optional 4" outlet box cover available

2791.03 Satin White **2791.16** Bright Satin Aluminum **2791.25** Satin Black

2792

Stix Plus 72" LED Wall Bar

72" w x ¾" H Shade: Optical Acrylic Extension: 1" LED: 48W, 3150 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV) ADA

Optional 4" outlet box cover available

2792.03 Satin White **2792.16** Bright Satin Aluminum **2792.25** Satin Black

2794

Stix Plus 98" LED Wall Bar

98 ½" w x ¾" h Shade: Optical Acrylic Extension: 1" LED: 57W, 4210 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Remote Transformer Dimmable by Electronic Low Voltage (ELV)

ADA

Optional 4" outlet box cover available

2794.03 Satin White

stix plus

The minimal profile of Stix-Bars extended in lengths up to 8', mounted as uninterrupted strips with remote power supplies.





SQ-Bar 40" LED Bath Bar

4 1/4" H x 40" W Shade: White Optical Acrylic 1 ½" н x 40" w x 2" D Extension: 3" Wall Plate: 4 1/4" sq LED: 26W, 1800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2423.01 Polished Chrome 2423.13 Satin Nickel

2422

SQ-Bar 32" LED Bath Bar

4 1/4" H x 32" W Shade: White Optical Acrylic 1 ½" н x 32" w x 2" D Extension: 3" Wall Plate: 4 1/4" sq LED: 21W, 1440 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2422.01 Polished Chrome 2422.13 Satin Nickel

2421

SQ-Bar 24" LED Bath Bar

4 1/4" H x 24" W Shade: White Optical Acrylic 1 ½" н x 24" w x 2" D Extension: 3" Wall Plate: 4 1/4" sq LED: 16W, 1080 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

ADA

2421.01 Polished Chrome 2421.13 Satin Nickel


2420

SQ-Bar 18" LED Bath Bar 4 1/4" H × 18" W Shade: White Optical Acrylic 1 ½" н x 18" w x 2" D Extension: 3" Wall Plate: 4 1/4" sq LED: 13W, 900 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV) ADA

2420.01 Polished Chrome 2420.13 Satin Nickel

SQ-bar



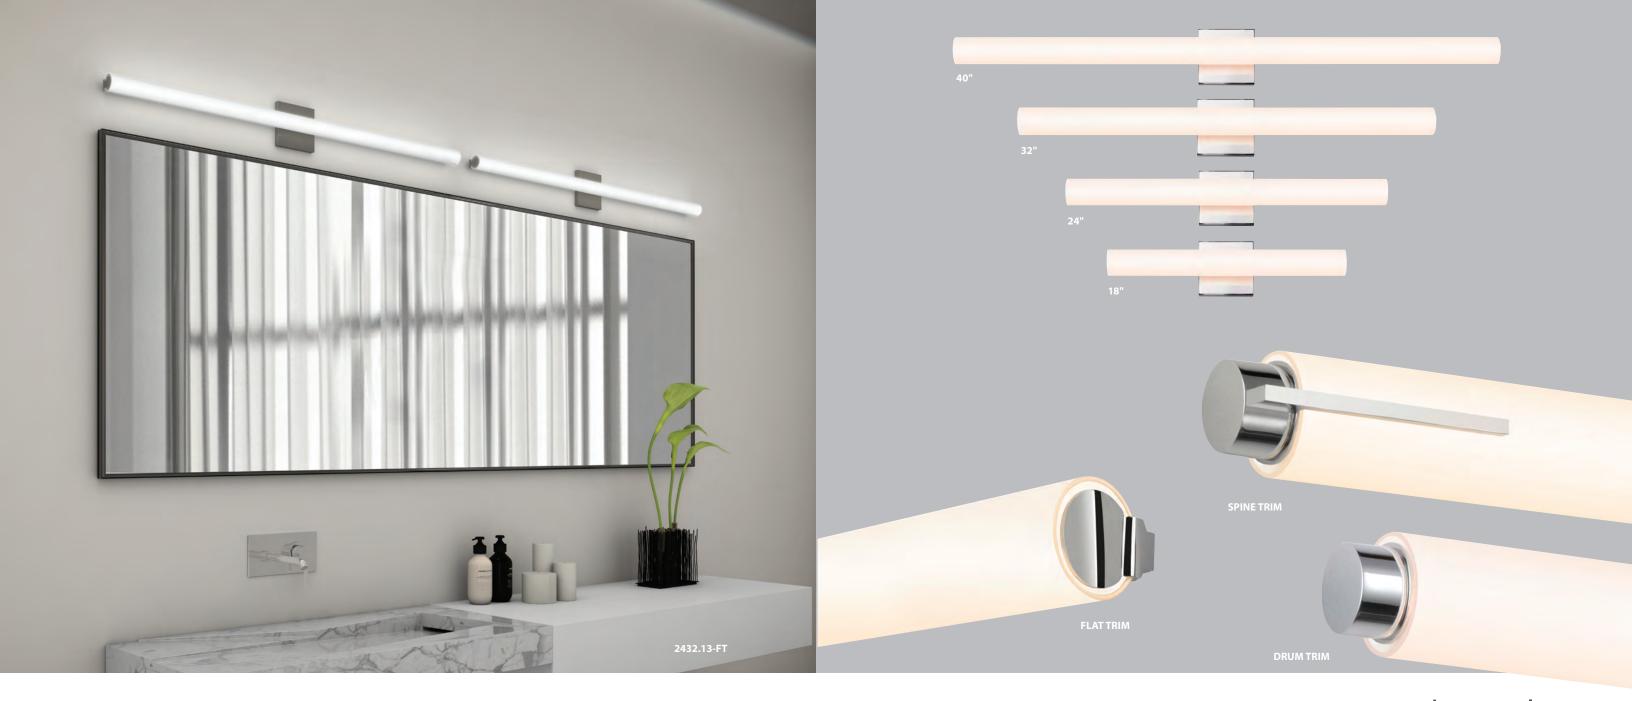

ADDITIONAL SPECIFICATIONS: 2" DIA White Etched Glass Tube Extension: 3"-3 1/4" Wall Plate: 4 1/4" sq Warm White (3000K), CRI 90 120VAC input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)
ADA

LED Bath Bars

ELD Datif Dats							
	18" LED Bath Bar		24" LED Bath Bar				
	Polished Chrome	Satin Nickel	Polished Chrome	Satin Nickel			
FLAT	2430.01-FT	2430.13-FT	2431.01-FT	2431.13-FT			
DRUM	2430.01-DT	2430.13-DT	2431.01-DT	2431.13-DT			
SPINE	2430.01-ST	2430.13-ST	2431.01-ST	2431.13-ST			
Dims:	18"–19 ½" OAL, LED: 13W, 900 Lumens		24"–25 ½" OAL, LED: 16W, 1080 Lumens				

LED Bath Bars

32" LED Bath Bar 40" LED Bath Bar Satin Nickel Polished Chrome Satin Nickel Polished Chrome FLAT 2432.01-FT 2432.13-FT 2433.01-FT 2433.13-FT 2432.01-DT 2433.01-DT 2433.13-DT DRUM 2432.13-DT SPINE 2432.01-ST 2432.13-ST 2433.01-ST 2433.13-ST Dims: 32"-33 ½" OAL, LED: 21W, 1440 Lumens 40"-41 ½" OAL, LED: 26W, 1800 Lumens

tubo slim

BATH BARS

Elegantly slender tubular glass LED bath bar and sconce lighting system. Available with 3 end trims, in a choice of finishes and sizes.



tubo slim

PANEL SCONCES

ADDITIONAL SPECIFICATIONS:

2" DIA White Etched Glass Tube Extension: 3"–3 ¼" Warm White (3000K), CRI 90 120VAC input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

LED Panel Sconces

	12" LED Panel Sconce	18" LED Panel Sconce	
	Polished Chrome	Polished Chrome	Satin Nickel
FLAT	2441.01-FT	2443.01-FT	N/A
DRUM	N/A	2443.01-DT	2443.13-DT
SPINE	2441.01-ST	2443.01-ST	N/A
Wall Plate Dims:	15" н х 4 ¾" w, LED: 8W, 540 Lumens	21" н х 4 ¾" w, LED: 13W, 900 Lumens	

ADDITIONAL SPECIFICATIONS:

2" DIA White Etched Glass Tube Extension: 3"–3 ¼" Wall Plate: 4 ¼" so Warm White (3000K), CRI 85 120VAC input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

tubo slim

SCONCES

LED Sconces

	12" LED Sconce		18" LED Sconce	
	Polished Chrome	Satin Nickel	Polished Chrome	Satin Nickel
FLAT	2440.01-FT	2440.13-FT	2442.01-FT	2442.13-FT
DRUM	2440.01-DT	2440.13-DT	2442.01-DT	2442.13-DT
SPINE	2440.01-ST	2440.13-ST	2442.01-ST	2442.13-ST
Dims:	12"-13 ¼" OAL, LED: 8W, 540 Lumens		18"–19 ¼" OAL, LED: 13W, 900 Lumens	





Parallel's even illumination from pure white glass also refracts a luminous glow from its precisely mitered clear edges. Parallel's quiet, but strong presence is defined by its pure geometry and crisp edged chrome supporting ends.

3860

Parallel 27" LED Bath Bar

4 ¼" н x 27" w Shade: Mitered White Glass w/Clear Edge 3" H X 25" W X 2 ¾" D Extension: 3 1/2" Wall Plate: 4 1/4" x 5" LED: 21W, 1440 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV) ADA

3860.01LED Polished Chrome



accanto

3010

Accanto 28" 1-Light Sconce Shade: Clear Glass w/White Acrylic Diffuser Extension: 3" Wall Plate: 28 1/2" x 4 1/2" Bulb: (1) 14W T5 Linear Fluorescent Mini Bipin Base (included) ADA

3010.01 Polished Chrome

3011

Accanto 40" 1-Light Sconce

40 1/4" H x 4 1/2" W Shade: Clear Glass w/White Acrylic Diffuser Extension: 3" Wall Plate: 40 1/4" x 4 1/2" Bulb: (1) 21W T5 Linear Fluorescent Mini Bipin Base (included) ADA

3011.01 Polished Chrome

3012

Accanto 28" 2-Light Sconce 28 1/2" H x 4 1/2" W Shade: Clear Glass w/White Acrylic Diffuser Extension: 3" Wall Plate: 28 1/2" x 4 1/2" Bulb: (2) 14W T5 Linear Fluorescent Mini Bipin Base (included)

3012.01 Polished Chrome

BATH | SONNEMAN° 321



dazzle

2565

Dazzle 12" Round LED Pendant

1 ¾" H X 12" DIA Shade: Clear Crushed Glass Canopy: 4 ½" DIA, W/6' Adjustable Cable LED: 30W, 1800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2565.01 Polished Chrome

2566

Dazzle 8" Round LED Surface Mount

1 34" H x 8" DIA Shade: Clear Crushed Glass Canopy: 6" DIA LED: 17W, 1000 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV) ADA

2566.01 Polished Chrome

2567

Dazzle 12" Round LED Surface Mount

1 3/4" H X 12" DIA Shade: Clear Crushed Glass Canopy: 10" DIA LED: 30W, 1800 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

ADA

2567.01 Polished Chrome

2568

Dazzle 6" Square LED Surface Mount

1 ¾" н х 6" w х 6" D Shade: Clear Crushed Glass Canopy: 4 1/4" sq LED: 8W, 450 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV) ADA

2568.01 Polished Chrome

2569

Dazzle 10" Square LED Surface Mount 1 34" H X 10" W X 10" D Shade: Clear Crushed Glass Canopy: 8" sq LED: 25W, 1500 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV) ADA **2569.01** Polished Chrome

Glittering and alive, LED points of light refract through hundreds of crushed and fused glass nuggets that dance and shimmer in a spectacular display.

BATH | SONNEMAN A WAY OF LIGHT





dazzle

2560

Dazzle 18" LED Bath Bar

5" н x 18" w Shade: Clear Crushed Glass Extension: 1 3/4" Wall Plate: 4 1/4" x 16" LED: 20W, 1200 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

ADA

2560.01 Polished Chrome

2561

Dazzle 24" LED Bath Bar 5" H × 24" W Shade: Clear Crushed Glass Extension: 1 ¾" Wall Plate: 4 1/4" x 22" LED: 27W, 1600 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

ADA


2561.01 Polished Chrome

2562

Dazzle 36" LED Bath Bar 5" H x 36" W Shade: Clear Crushed Glass Extension: 1 ¾" Wall Plate: 4 1/4" x 34" LED: 40W, 2400 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2562.01 Polished Chrome



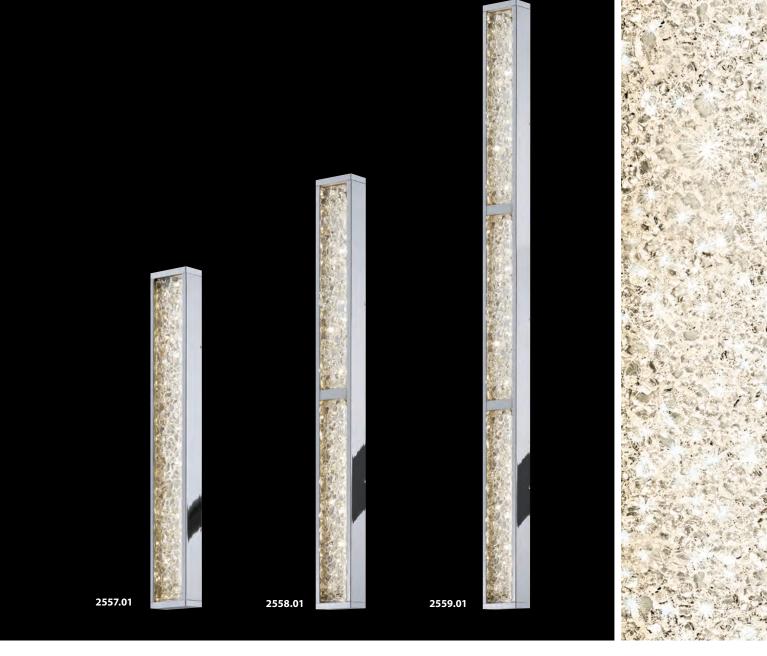

dazzle slim

2557

Dazzle Slim 18" LED Bath Bar 18 ¼" H X 2 ½" W Shade: Clear Crushed Glass Extension: 1 1/2" Wall Plate: 18 1/4" H x 2 1/2" w LED: 16W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2557.01 Polished Chrome

2558

Dazzle Slim 24" LED Bath Bar 24" H x 2 $\frac{1}{2}$ " W Shade: Clear Crushed Glass Extension: 1 1/2" Wall Plate: 24" H x 2 1/2" w LED: 23W, 1150 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2558.01 Polished Chrome

2559

Dazzle Slim 36" LED Bath Bar 36" H x 2 ½" w Shade: Clear Crushed Glass Extension: 1 1/2" Wall Plate: 36" H x 2 1/2" w LED: 30W, 1610 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2559.01 Polished Chrome

LED illumination shimmers brilliantly through hundreds of crushed and fused glass nuggets set in a slim profile.







ROHR TALL SCONCE

Bent chrome arms support a rotating glass tube with a chrome reflector panel, providing directional LED illumination along its length. Connected by solid geometric fittings, this composition defines its functionality in the ethos of Bauhaus, echoing the enduring appeal of the soft bends of a Breuer chair.

2492

Bauhaus Revisited Rohr Tall LED Sconce

29 1/2" H x 2 3/4" W Shade: White Etched Glass 23" H X 2" DIA W/270° Rotation Extension: 5 1/2" Wall Plate: 15 3/4" x 2 3/4" LED: 15W, 1200 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2492.01 Polished Chrome





bauhaus revisited

2493

Bauhaus Revisited Klammer Tall LED Sconce

31" H x 2 ¾" W Shade: White Etched Glass 23" H X 2" DIA W/270° Rotation Extension: 3 ¾" Wall Plate: 31" x 2 3/4" LED: 15W, 1200 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2493.01 Polished Chrome

2491

Bauhaus Revisited Klammer Short LED Sconce

22 ½" H x 2 ¾" W Shade: White Etched Glass 14 1/4" H x 2" DIA W/270° Rotation Extension: 3 ¾" Wall Plate: 22 1/2" x 2 3/4" LED: 10W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2491.01 Polished Chrome

KLAMMER SCONCES

Scaled in two sizes, these cylindrical glass fixtures are mounted on bent chrome brackets and rotate to direct LED illumination as desired.







2490.01

bauhaus revisited

2490

Bauhaus Revisited Rohr Short LED Sconce
18" H × 2 ¾" w
Shade: White Etched Glass
14 ¼" H × 2" DIA W/270° Rotation
Extension: 5 ½" Wall Plate: 8 3/4" x 2 3/4" LED: 10W, 840 Lumens
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2490.01 Polished Chrome

ROHR SHORT SCONCE

This cylindrical glass sconce rotates to direct LED illumination as desired. Detailed with perfectly machined fittings, this wall-mounted fixture glorifies the industrial aesthetic that was Bauhaus.







Bauhaus Columns 18" LED Bath Bar

18" H x 2 1/4" W Shade: White Etched Glass 18" h x 2" dia Extension: 4" Wall Plate: 4 ½" dia x ½" d LED: 11W, 1260 Lumens (770 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2501.01 Polished Chrome **2501.23** Satin Chrome

2502

Bauhaus Columns 24" LED Bath Bar

24" H x 2 1/4" W Shade: White Etched Glass 24" h x 2" dia Extension: 4" Wall Plate: 4 1/2" DIA X 1/2" D LED: 15W, 1650 Lumens (1000 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2502.01 Polished Chrome **2502.23** Satin Chrome

2503


Bauhaus Columns 32" LED Bath Bar

32" H X 2 1/4" W Shade: White Etched Glass 32" H X 2" DIA Extension: 4" Wall Plate: 4 1/2" DIA X 1/2" D LED: 21W, 2380 Lumens (1430 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2503.01 Polished Chrome **2503.23** Satin Chrome



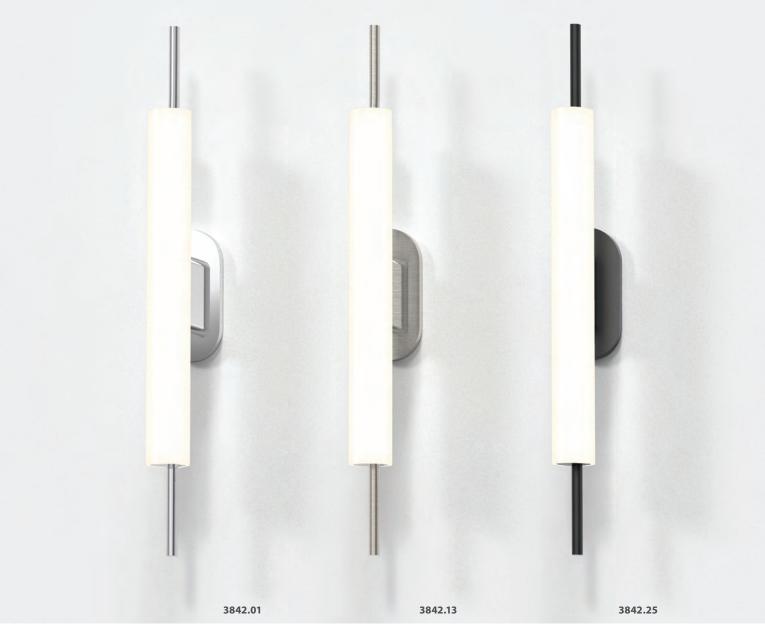

piccolo encore®

3842

Piccolo Encore LED Sconce

24" H X 2" W Shade: White Etched Cased Glass 16" H x 2" W x 2" D Extension: 4" Wall Plate: 6" H x 3" w x ½" □ LED: 12W, 1380 Lumens (940 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3842.01 Polished Chrome **3842.13** Satin Nickel **3842.25** Satin Black

Recalling the dramatic play of simple elements of varying scales, this flute-like sconce is dramatically reenvisioned with a refined execution and a powerful LED light engine.





New Edge 24" LED Bath Bar

24" H x 5" W

Shade: White Etched Glass 23" H x 4 1/4" W x 1 3/4" D Extension: 2 ¾" Wall Plate: 24" H x 5" w x 1/2" D LED: 12W, 1150 Lumens (700 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3797.01 Polished Chrome 3797.13 Satin Nickel **3797.25** Satin Black

3798

New Edge 32" LED Bath Bar

32" H x 5" W

Shade: White Etched Glass 31" H X 4 1/4" W X 1 3/4" D Extension: 2 3/4" Wall Plate: 32" H x 5" W x 1/2" D LED: 16W, 1590 Lumens (950 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3798.01 Polished Chrome **3798.13** Satin Nickel **3798.25** Satin Black

3799

New Edge 40" LED Bath Bar

40" H x 5" W Shade: White Etched Glass

39" H x 4 1/4" W x 1 3/4" D Extension: 2 ¾" Wall Plate: 40" H x 5" W x 1/2" D LED: 21W, 2120 Lumens (1280 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3799.01 Polished Chrome 3799.13 Satin Nickel **3799.25** Satin Black





Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION

7243.72-WL Textured Bronze **7243.74-WL** Textured Gray **7243.98-WL** Textured White

Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent


WET LOCATION

7245.72-WL Textured Bronze **7245.74-WL** Textured Gray **7245.98-WL** Textured White

two sizes, Grand and Petite.





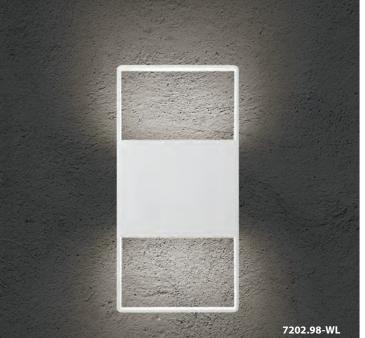



light frames

7200

Light Frames Downlight LED Sconce

13" н x 7" w Shade: Aluminum Extension: 2 1/4" Wall Plate: 4 1/2" x 6 1/2" LED: 14W, 1820 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7200.72-WL Textured Bronze **7200.74-WL** Textured Gray **7200.98-WL** Textured White

7204

Light Frames 21" Up/Down LED Sconce

21" н x 7" w Shade: Aluminum Extension: 2 1/4" Wall Plate: 4 1/2" x 6 1/2" LED: 29W, 3710 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

WET LOCATION, ADA

7204.72-WL Textured Bronze **7204.74-WL** Textured Gray 7204.98-WL Textured White

Framed LED radiance is internally directed and reflected to illuminate indoor or outdoor surfaces. Light is projected downward or up and down to halo the bold yet thin profile.

sword The power of simplicity is defined 7240 by the less-is-more declaration of Sword 24" LED Sconce this rectangular blade of light. 24 ¼" H x 1 ¾" W Shade: Aluminum Extension: 2 ¾" Wall Plate: 4 1/2" sq LED: 13W, 1190 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION, ADA **7240.72-WL** Textured Bronze **7240.74-WL** Textured Gray 7240.74-WL 7240.98-WL Textured White

stripe®

This square vertical column is a strong and commanding element, with presence and dramatic impact. Light is indirectly reflected off the surface it is mounted upon, haloing the white LED front stripe, which can be made red, blue, or yellow by an interchangeable color strip.

7113

Stripe 24" LED Sconce

Shade: Aluminum w/Colored Strip

Wall Plate: 6" н x 4 ½" w x ½" D LED: (2) 11W (total), 990 Lumens (530 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7113.72-WL Textured Bronze **7113.74-WL** Textured Gray 7113.98-WL Textured White

7115

Stripe 30" LED Sconce

30" н x 1 ½" w x 1 ½" D

Wall Plate: 6" н x 4 ½" w x ½" D LED: (2) 15W (total), 1390 Lumens (740 Net Lumens) Warm White (3000K), 90 CRI


120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7115.72-WL Textured Bronze **7115.74-WL** Textured Gray 7115.98-WL Textured White

7115.72-WL

INSIDE-OUT SONNEMAN A WAY OF LIGHT

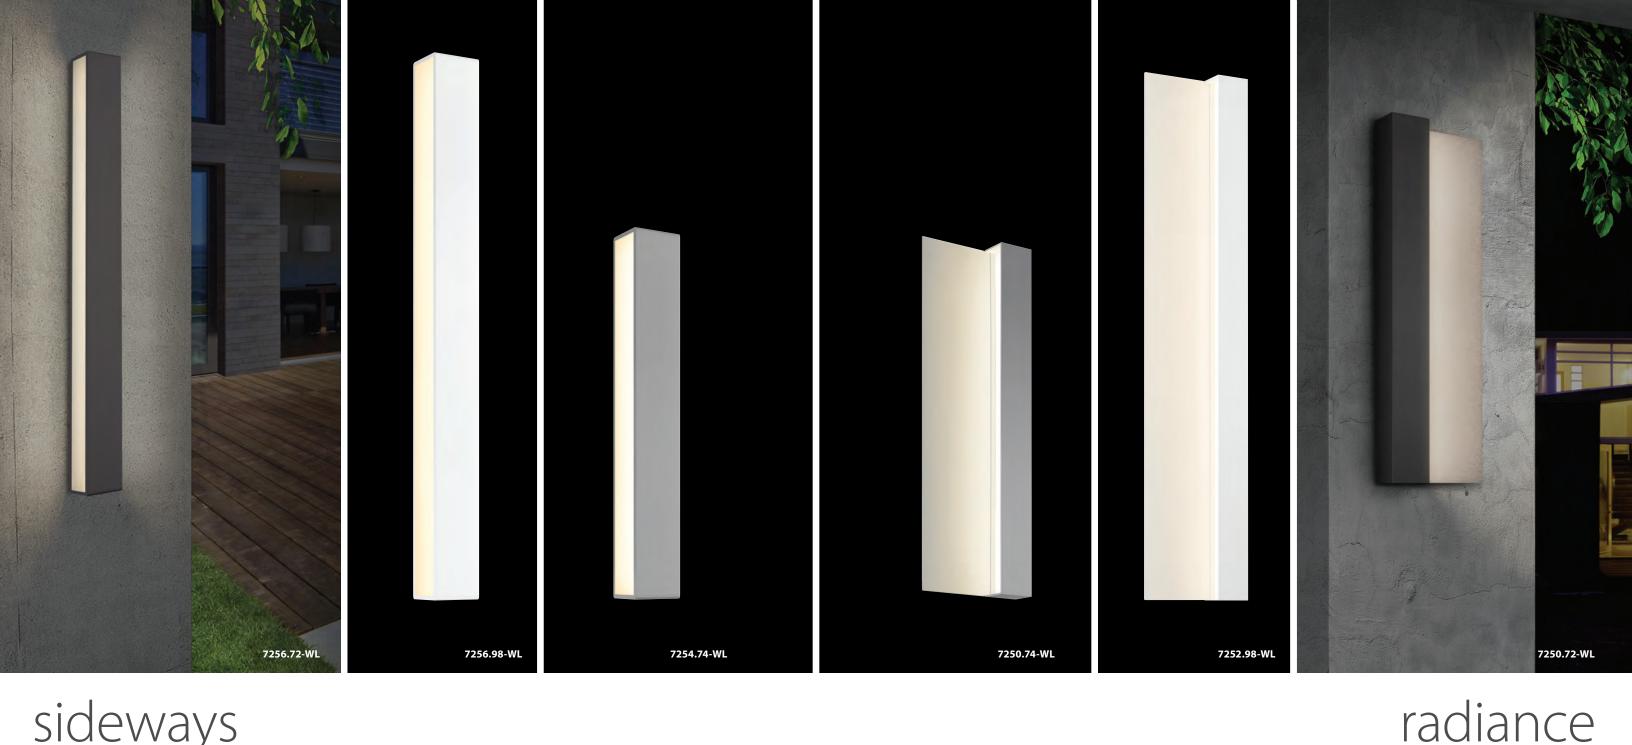

sideways

Broad and powerful LED illumination projects from the sides of a simple linear profile.

7256

Sideways 36" LED Sconce

Shade: Aluminum w/Optical Acrylic Extension: 3 1/4" Wall Plate: 35 3/4" x 2 1/2" LED: 55W, 2690 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

WET LOCATION (vertical mounting only)

7256.72-WL Textured Bronze **7256.74-WL** Textured Grav **7256.98-WL** Textured White

7254

Sideways 24" LED Sconce

Shade: Aluminum w/Optical Acrylic Extension: 3 1/4" Wall Plate: 23 1/2" x 2 1/2" LED: 31W, 1730 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

WET LOCATION (vertical mounting only)

7254.72-WL Textured Bronze **7254.74-WL** Textured Grav **7254.98-WL** Textured White

7250

Radiance 20" LED Sconce

20" н x 5 ¾" w Shade: Aluminum Extension: 2 1/4" Wall Plate: 18 3/4" x 4 3/4" LED: 20W, 1680 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION (vertical mounting only)

7250.72-WL Textured Bronze **7250.74-WL** Textured Gray 7250.98-WL Textured White

7252

Radiance 30" LED Sconce

30" н x 5 ¾" w Shade: Aluminum Extension: 2 1/4" Wall Plate: 29" x 4 3/4" LED: 29W, 2380 Lumens Warm White (3000K), 90 CRI 100-277VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV), Standard (TRIAC) Incandescent (at 120VAC only), or 0-10V

WET LOCATION (vertical mounting only)

7252.72-WL Textured Bronze **7252.74-WL** Textured Grav 7252.98-WL Textured White

A wash of radiant LED illumination is directed to one side of an architectural linear

form, revealing the texture of its

panel and the surface beyond.

INSIDE-OUT | SONNEMAN®







glass glow²

A thick, etched glass panel, suspended in air from a horizontal plane, radiates its LED illumination from within.

7275

Glass Glow² LED Sconce

Shade: Etched Glass 4 ½" H x 4 ¼" W x ¾" D Extension: 3" Wall Plate: 5 ¾" H x 5" w LED: 10W, 900 Lumens (610 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

Bright Satin Aluminum (Inside Only)

Satin Black (Inside Only) 7275.25 **7275.72-WL** Textured Bronze **7275.74-WL** Textured Gray 7275.98-WL Textured White



2724

Midtown Short LED Sconce

10 ¾" H x 7" W Shade: Clear Etched Glass 9" н х 7" w Extension: 4" Wall Plate: 4 1/2" sq LED: 14W, 1120 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

2724.72-WL Textured Bronze **2724.74-WL** Textured Gray 2724.98-WL Textured White

2725

Midtown Tall LED Sconce

18" н x 7" w Shade: Clear Etched Glass 16" H x 7" w Extension: 4" Wall Plate: 4 ½" sq LED: 20W, 1600 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA


2725.72-WL Textured Bronze 2725.74-WL Textured Gray 2725.98-WL Textured White

midtown

The classic modern elegance of straightforward geometry sets a frosted glass rectangle against a crisp rectangular beam, radiating the glow of its LED illumination.

INSIDE-OUT | SONNEMAN®



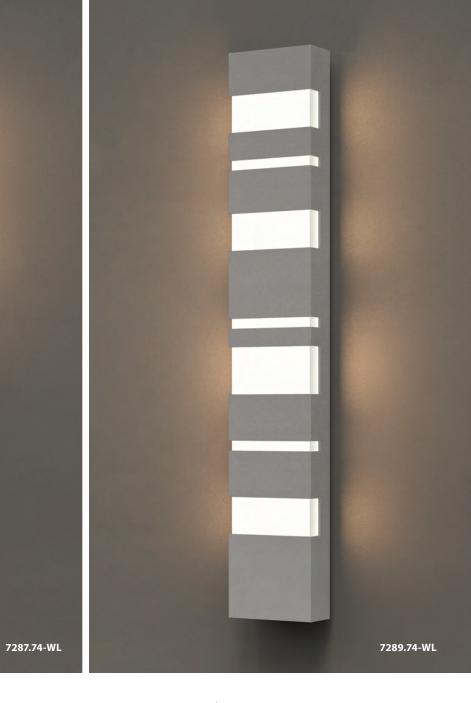

A welcoming rhythm of thick and

crisp-edged aluminum and acrylic

rectangular column, brings a dramatic,

thin LED-lit spaces, cut into this

jazz-like architectural feel to an

exterior or interior wall.

7287

Jazz Notes 21" LED Sconce

21" H x 6" W

Shade: Aluminum w/Optical Acrylic Diffuser 21" H x 6" W x 2 ½" D

Extension: 3"

Wall Plate: 20" H x 5 1/4" w

LED: 13W, 1300 Lumens (530 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION (vertical mounting only)

7287.72-WL Textured Bronze **7287.74-WL** Textured Gray 7287.98-WL Textured White

7289

Jazz Notes 36" LED Sconce

36" H x 6" W

Shade: Aluminum w/Optical Acrylic Diffuser 36" H x 6" W x 2 ½" D Extension: 3"

Wall Plate: 35" H x 5 1/4" w

LED: 20W, 1870 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION (vertical mounting only)

7289.72-WL Textured Bronze **7289.74-WL** Textured Gray 7289.98-WL Textured White

jazz notes

flat box®

PANEL SCONCES

The subtle architectural geometry of a long flat plane, offset from the surface, reflects LED illumination from the flat box mounted upon it. Available in bidirectional and downlight-only configurations.



7106.98-WL

7106

Flat Box LED Panel Sconce

17" н x 6" w Shade: Aluminum 7" H X 6" W X 2" D Extension: 2 1/2" Wall Plate: 16 ½" H x 5 ½" W x ½" D LED: 11W, 990 Lumens (450 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7106.72-WL Textured Bronze **7106.74-WL** Textured Gray **7106.98-WL** Textured White

7107

Flat Box Up/Down LED Sconce

7" H x 6" W Shade: Aluminum 7" H x 6" W x 2" D Extension: 2 1/2" Wall Plate: 6 ½" H x 5 ½" W x ½" D LED: (2) 21W (total), 1980 Lumens (900 Net Lumens) LED: 11W, 990 Lumens (450 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION, ADA

7107.72-WL Textured Bronze **7107.74-WL** Textured Gray **7107.98-WL** Textured White

7105

Flat Box LED Sconce

7" H x 6" W Shade: Aluminum 7" H x 6" W x 2" D Extension: 2 1/2" Wall Plate: 6 1/2" H x 5 1/2" W x 1/2" D Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7105.72-WL Textured Bronze **7105.74-WL** Textured Gray **7105.98-WL** Textured White





A crisp-edged rectangular aluminum column delivers bright LED illumination outward from a broad inset acrylic band and downward from a powerful recessed downlight.

7284

Band 21" LED Sconce

LED: 13W, 1300 Lumens (total), 780 Lumens
Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box

or Standard (TRIAC) Incandescent **WET LOCATION, ADA**

7284.72-WL Textured Bronze **7284.74-WL** Textured Gray **7284.98-WL** Textured White

7282

Band 13" LED Sconce

LED: 13W, 1300 Lumens (total), 780 Lumens
Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box

WET LOCATION, ADA

7282.72-WL Textured Bronze **7282.74-WL** Textured Gray **7282.98-WL** Textured White

7280

Band 8" LED Sconce

8" H x 6" w
Shade: Aluminum w/Optical Acrylic Diffuser |
8" H x 6" w x 2 ½" p
Extension: 3" LED: 13W, 1300 Lumens (total), 780 Lumens Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent **WET LOCATION, ADA**

7280.72-WL Textured Bronze 7280.74-WL Textured Gray **7280.98-WL** Textured White

Light from the architectural strength of a solid rectangular column brings

box column

Box Column 22" LED Sconce

22" н х 3 ½" w Shade: Optical Acrylic 13" н х 3 ½" w х 2" р Wall Plate: 21 ¼" н x 2 ¾" w LED: 15W, 1020 Lumens (935 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)
WET LOCATION (vertical mounting only)

7352.72-WL Textured Bronze

7352.74-WL Textured Gray **7352.98-WL** Textured White 7354

32" H x 3 ½" w Shade: Optical Acrylic 23" H x 3 ½" w x 2" □ Wall Plate: 31 1/4" H x 2 3/4" w
LED: 26W, 1820 Lumens (1665 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box

7354.74-WL Textured Gray 7354.98-WL Textured White

7352.72-WL Box Column 32" LED Sconce 7354.72-WL Dimmable by Electronic Low Voltage (ELV)
WET LOCATION (vertical mounting only) **7354.72-WL** Textured Bronze





as a triangular column of LED light.

7332

Triform 18" LED Sconce 18" H × 5 ½" W Shade: Optical Acrylic 9 ¾" H × 5 ½" W × 2 ¾" D Extension: 3 ½"

Wall Plate: 17 ¼" н x 4 ¾" w

LED: 10W, 1100 Lumens (935 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION (vertical mounting only)

7332.72-WL Textured Bronze 7332.74-WL Textured Gray 7332.98-WL Textured White

7333

Triform 24" LED Sconce 24" H × 5 ½" W Shade: Optical Acrylic 15 ¾" H × 5 ½" W × 2 ¾" D Extension: 3 1/2"
Wall Plate: 23 1/4" H x 4 3/4" w
LED: 14W, 1450 Lumens (1285 Net Lumens)
Warm White (3000K), 90 CRI Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION (vertical mounting only)

7333.72-WL Textured Bronze 7333.74-WL Textured Gray
7333.98-WL Textured White

7334

Triform 36" LED Sconce 36" H × 5 ½" w Shade: Optical Acrylic 27 ¾" H × 5 ½" w × 2 ¾" D Extension: 3 ½" Wall Plate: 35 ½" H x 4 ¾" w
LED: 20W, 2210 Lumens (2065 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION (vertical mounting only)

7334.72-WL Textured Bronze 7334.74-WL Textured Gray 7334.98-WL Textured White













reveal

An illuminated perimeter is revealed between the layered planes of this LED luminaire, casting light indirectly on three of its textured sides.

7267

Inset Tall LED Sconce

Extension: 2 ½" Wall Plate: 19" H x 7" w 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7267.72-WL Textured Bronze 7267.74-WL Textured Gray 7267.98-WL Textured White

7266

Inset Short LED Sconce

11" H x 8" W Shade: Aluminum 11" H x 8" W x 2" D Extension: 2 1/2" Wall Plate: 10" H x 7" w LED: 16W, 1100 Lumens (840 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7266.72-WL Textured Bronze **7266.74-WL** Textured Gray 7266.98-WL Textured White

7264

Reveal Short LED Sconce

11 ¾" H x 8" W Shade: Aluminum 9 ¼" н x 4 ½" w x 1 ¼" D Extension: 1 34" Wall Plate: 10 ¾" H x 7" w LED: 21W, 1335 Lumens (560 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer Dimmable by Electronic Low Voltage (ELV) WET LOCATION, ADA

7264.72-WL Textured Bronze **7264.74-WL** Textured Gray 7264.98-WL Textured White

7265

Reveal Tall LED Sconce

19" н x 8" w Shade: Aluminum 15 ¾" H x 4 ½" W x 1 ¼" D Extension: 1 ¾" Wall Plate: 18" H x 7" w LED: 27W, 1700 Lumens (850 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

7265.72-WL Textured Bronze **7265.74-WL** Textured Gray 7265.98-WL Textured White

INSIDE-OUT





prairie

rectilinear column.

7270

Prairie 18" LED Sconce

18" H x 11 ½" W

Shade: Aluminum w/Optical Acrylic Diffuser 18" H x 8" W x 2" D

Extension: 4"

Wall Plate: 17" H x 7" w

LED: 8W, 840 Lumens (460 Net Lumens) Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7270.72-WL Textured Bronze 7270.74-WL Textured Gray 7270.98-WL Textured White

7272

Prairie 26" LED Sconce

26" н х 11 ½" w Shade: Aluminum w/Optical Acrylic Diffuser

26" н х 8" w х 2" D Extension: 4"

Wall Plate: 25" H x 7" w LED: 13W, 1320 Lumens (890 Net Lumens)


Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7272.72-WL Textured Bronze **7272.74-WL** Textured Gray **7272.98-WL** Textured White

A Prairie-style gesture within this contemporary form is a nod to the functionalism of early modernism.

The illuminated acrylic panel is perfectly framed within the solid

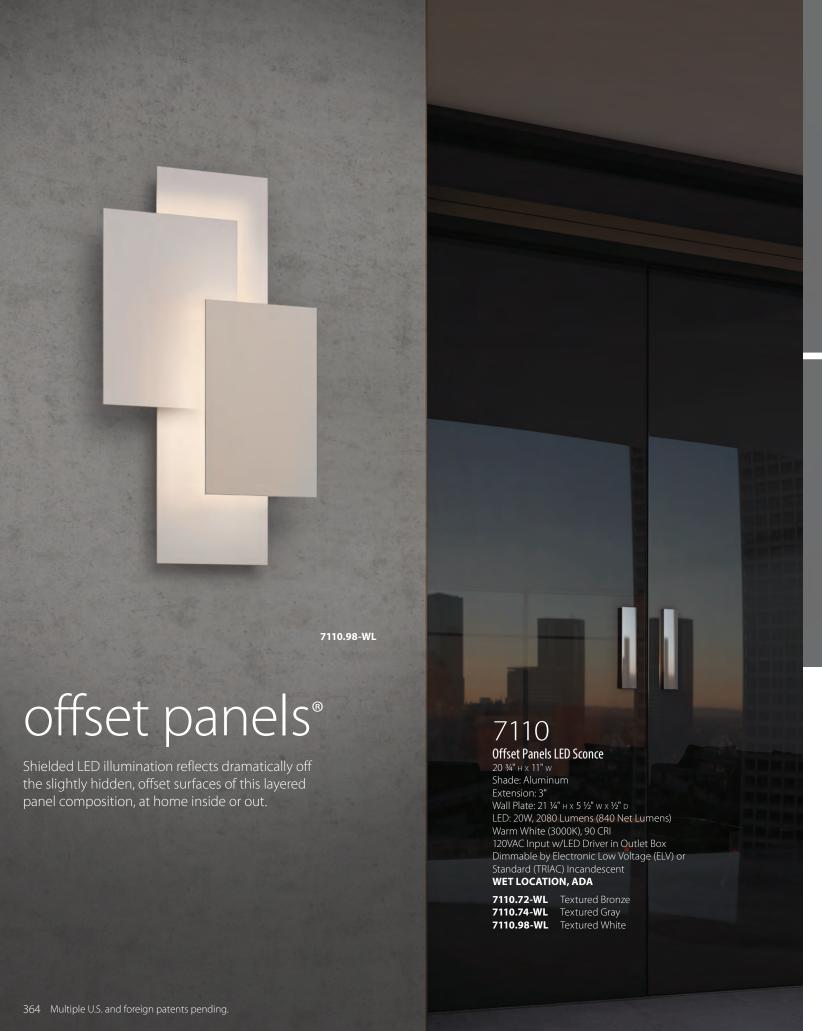









box

7340

Box LED Sconce

4 ½" H x 3 ½" W
Shade: Die-Cast Aluminum
4 ½" H x 3 ½" W x 2" D
Extension: 2 ½"
Wall Plate: 4 ¼" H x 3" W
LED: 10W, 1020 Lumens (645 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Non-Dimming

WET LOCATION, ADA

7340.72-WL Textured Bronze **7340.74-WL** Textured Gray **7340.98-WL** Textured White

triform

7320

Triform Compact LED Sconce

4 ½" H x 3 ½" W

Shade: Die-Cast Aluminum

4 ½" H x 3 ½" W x 2" D

Extension: 2 ½"

Wall Plate: 4 ¼" H x 3" W

LED: 10W, 980 Lumens (385 Net Lumens)

Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Non-Dimming

WET LOCATION, ADA

7320.72-WL Textured Bronze 7320.74-WL Textured Gray 7320.98-WL Textured White Compact luminaires direct light down from the pure geometry of a rectangular or triangular prism.



crest

LED illumination from a crescent downlight evokes a lunar glow.



7228.74-WL

7228

Crest LED Sconce

Shade: Die-Cast Aluminum w/Frosted Optical Acrylic Extension: 2" Wall Plate: 4 3/4" x 9 3/4" LED: 12W, 610 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION, ADA

7228.72-WL Textured Bronze **7228.74-WL** Textured Gray



7226.74-WL

7226

Cusp LED Sconce Shade: Die-Cast Aluminum w/Frosted Optical Acrylic Extension: 5" Wall Plate: 5 1/4" x 9 3/4" LED: 14W, 1010 Lumens

Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION

7226.72-WL Textured Bronze 7226.74-WL Textured Gray Textured White

LED illumination projects from the bottom and inner faces of a mounted crescent to illuminate its textured panel and the area below.









ridgeline


7234

Ridgeline LED Sconce Shade: Die-Cast Aluminum Extension: 3 1/4" Wall Plate: 7 ½" sq LED: 16W, 1260 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7234.72-WL Textured Bronze **7234.74-WL** Textured Gray **7234.98-WL** Textured White

Two edges sweep upward to form a sculpted ridge projecting LED illumination from its sheer end face. This versatile architectural piece can direct light upward or downward in indoor or outdoor applications.

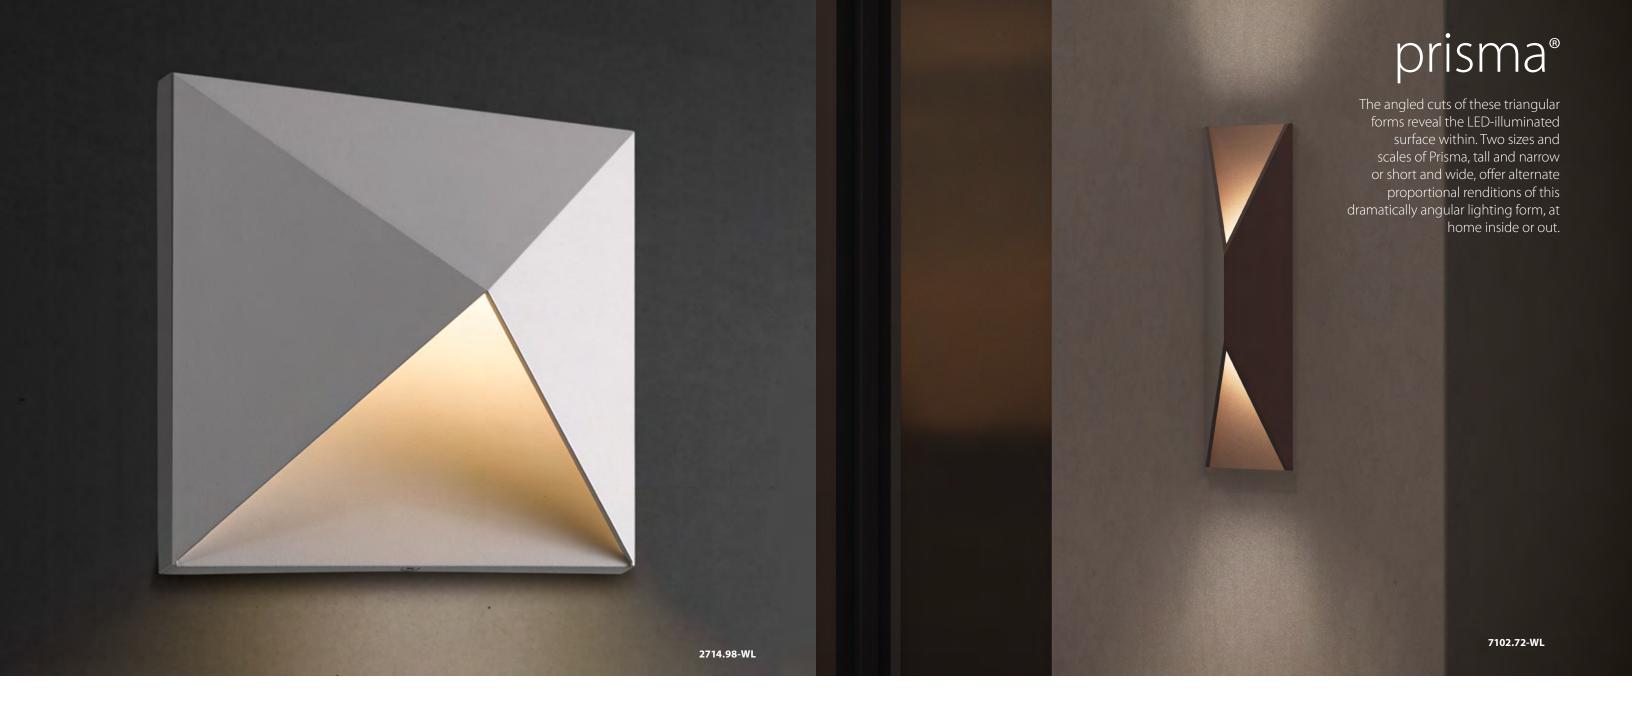

prism

Perpendicular edges and faces form a prism that directs LED illumination from its open face.



2714.72-WL

2714

Prism LED Sconce

8" H x 8" W Shade: Die-Cast Aluminum Extension: 3" Wall Plate: 8" sq LED: 18W, 1000 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

WET LOCATION (downlight only), ADA

2714.98 Textured White (inside only) **2714.72-WL** Textured Bronze **2714.74-WL** Textured Gray 2714.98-WL Textured White



7100.74-WL

7100

Prisma LED Sconce

11" H x 7" w Shade: Aluminum Extension: 4" Wall Plate: 9 3/4" H x 5 3/4" W x 1/2" D LED: (2) 21W (total), 1980 Lumens (900 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7100.72-WL Textured Bronze **7100.74-WL** Textured Gray 7100.98-WL Textured White

7102

18" H x 5" W

Prisma Tall LED Sconce

Shade: Aluminum Extension: 3" Wall Plate: 17 ½" н x 4 ½" w x ½" D LED: (2) 16W (total), 1490 Lumens (470 Net Lumens) Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7102.72-WL Textured Bronze **7102.74-WL** Textured Gray 7102.98-WL Textured White

Multiple U.S. and foreign patents pending.



chamfer

A crisp rectangular tube is cut on each end at an extreme angle to reveal an interior surface reflector that radiates LED illumination vertically in two directions.

2716

Chamfer LED Sconce

11" H x 5" W Shade: Aluminum Extension: 2 3/4" Wall Plate: 4 1/2" sq LED: 20W, 1400 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

2716.72-WL Textured Bronze **2716.74-WL** Textured Gray 2716.98-WL Textured White

2361

Angled Plane Narrow Downlight LED Sconce 7 ¾" H x 4" W

Shade: Aluminum Extension: 2 1/4" Wall Plate: 5 1/4" x 2 1/2" LED: 10W, 420 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Fixture Dimmable by Electronic Low Voltage (ELV)

WET LOCATION (downlight only), ADA

2361.72-WL Textured Bronze **2361.74-WL** Textured Gray 2361.98-WL Textured White

2363

Angled Plane Downlight LED Sconce


7 ¾" H X 7" W Shade: Aluminum Extension: 2 1/4" Wall Plate: 5 1/4" x 5 1/2" LED: 13W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Fixture Dimmable by Electronic Low Voltage (ELV)

WET LOCATION (downlight only), ADA

2363.72-WL Textured Bronze **2363.74-WL** Textured Gray 2363.98-WL Textured White

Impossible to improve on geometry, Angled Plane downlight reflects downward LED illumination for outdoor applications, and can also be used as an uplight for indoor use.

We continue to offer our original versions of Angled Plane with up and down lighting for interior locations. See page 195

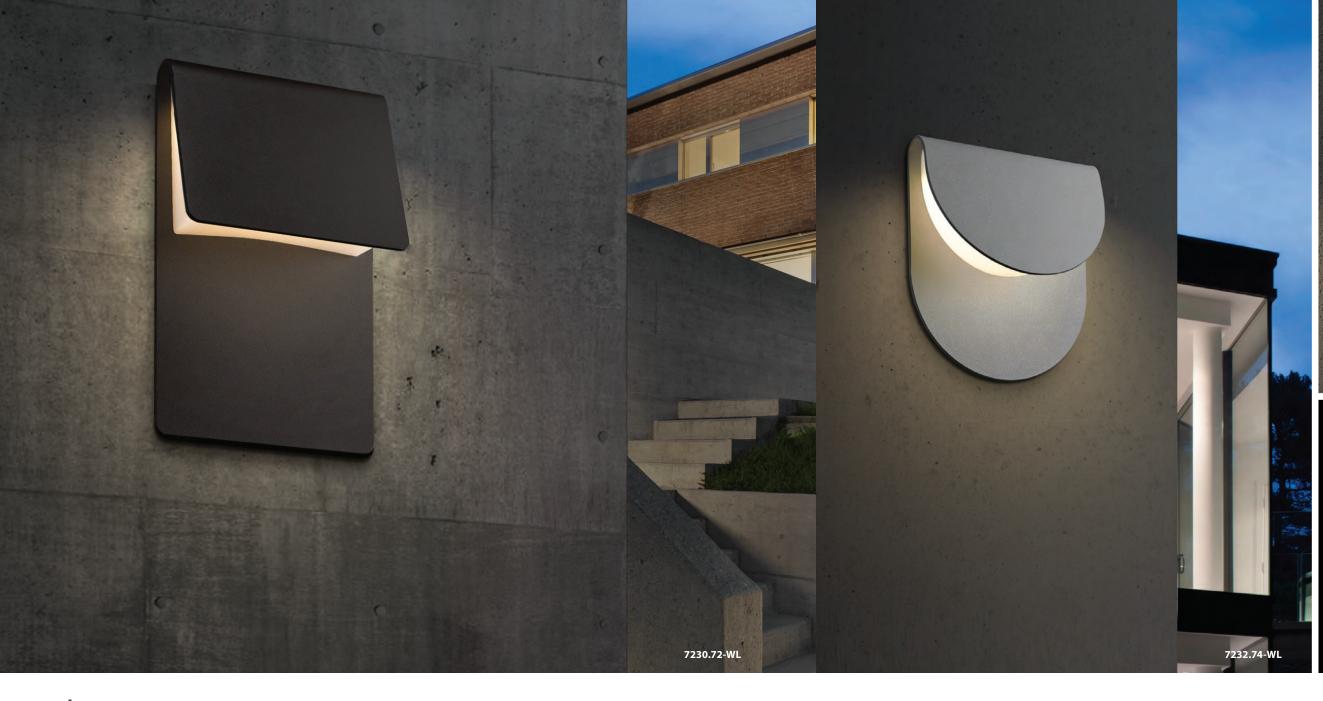





A solid aluminum shade drapes softly over an optical acrylic diffuser that directs LED illumination down and to the sides of these elegantly simple outdoor shapes.

7230

Ply LED Sconce

11" н х 7" w Shade: Aluminum w/Optical Acrylic Extension: 3" Wall Plate: 9 1/4" x 6" LED: 16W, 1260 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7230.72-WL Textured Bronze **7230.74-WL** Textured Gray **7230.98-WL** Textured White

7230.74-WL

7232

Cape LED Sconce

8" H x 7" w Shade: Aluminum w/Optical Acrylic Extension: 2 ¾" Wall Plate: 6 3/4" x 6" LED: 16W, 1260 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7232.72-WL Textured Bronze **7232.74-WL** Textured Gray **7232.98-WL** Textured White

7232.72-WL

cape

2712


Tab LED Sconce

9" н х 5 ½" w Shade: Die-Cast Aluminum Extension: 4" Wall Plate: 5" x 4 1/2" LED: 15W, 1260 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

2712.72-WL Textured Bronze **2712.98-WL** Textured White

INSIDE-OUT | SONNEMAN 375

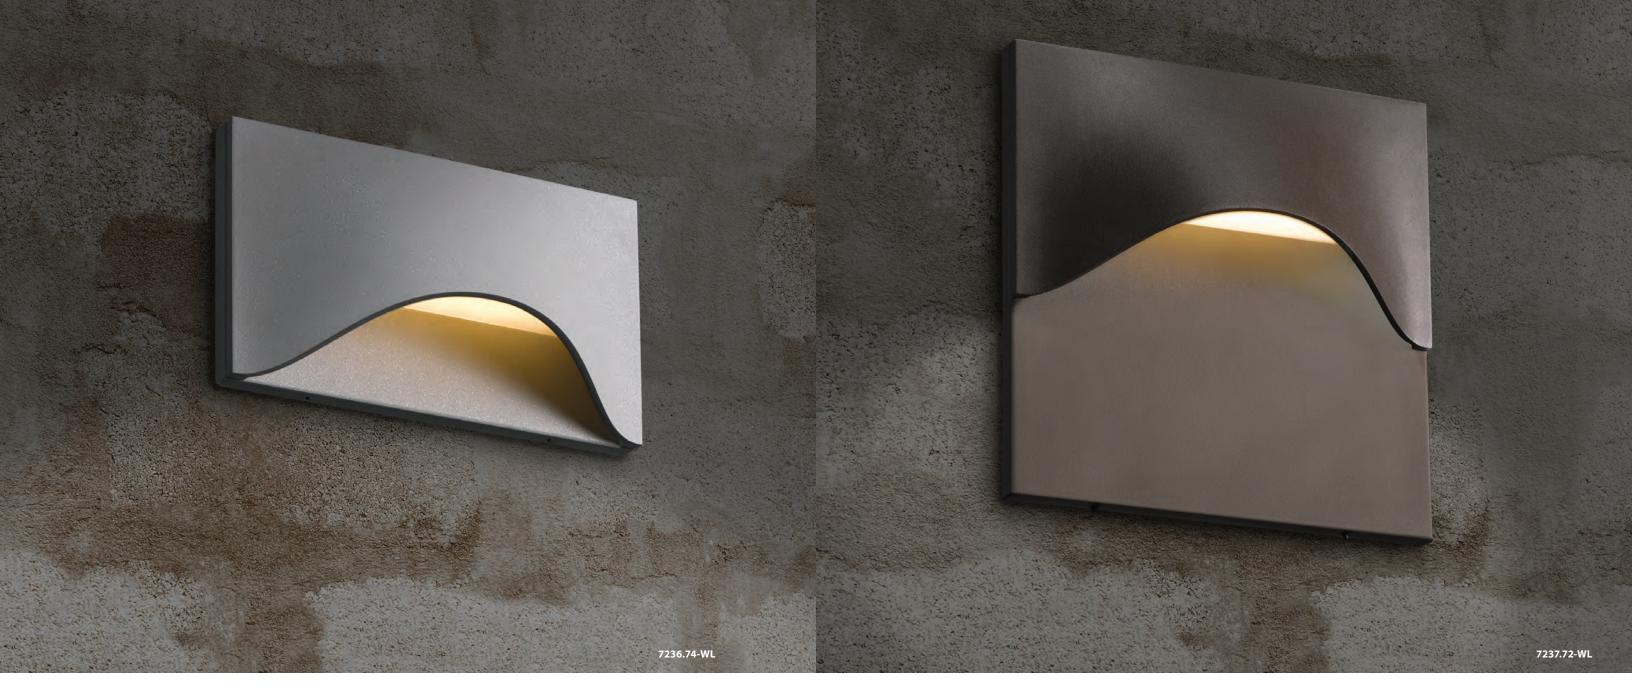

tides

LOW

A flowing wave-like surface with a subtle softness is set against a crisp rectangular form to bathe the area below in LED illumination.

7236


Tides Low LED Sconce

4 ½" H x 8" W Shade: Die-Cast Aluminum Extension: 2 1/2" Wall Plate: 4 1/2" x 8" LED: 20W, 1900 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION (downlight only), ADA

7236.72-WL Textured Bronze **7236.74-WL** Textured Gray 7236.98-WL Textured White



7236.72-WL



7237

Tides High LED Sconce Shade: Die-Cast Aluminum Extension: 2 1/2" Wall Plate: 8" sq LED: 20W, 1900 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION (downlight only), ADA


7237.72-WL Textured Bronze **7237.74-WL** Textured Gray **7237.98-WL** Textured White

7237.74-WL

INSIDE-OUT | SONNEMAN 377





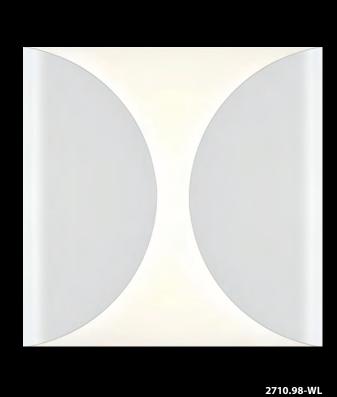

folds

2711

Folds Tall LED Sconce Shade: Aluminum Extension: 2" Wall Plate: 12 3/4" x 5" LED: 20W, 1300 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

2711.72-WL Textured Bronze **2711.74-WL** Textured Gray **2711.98-WL** Textured White

2710

Folds LED Sconce 8" H X 8" W Shade: Aluminum Extension: 2 1/4" Wall Plate: 6 1/2" sq LED: 15W, 840 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)
WET LOCATION, ADA

2710.72-WL Textured Bronze **2710.74-WL** Textured Gray 2710.98-WL Textured White

Rounded ends of a planar surface are folded to form a simple volume of reflected LED illumination, scaled in two sizes and designed for indoor or outdoor applications.









7223.98-WL



7220.98-WL



7238.74-WL

shear

Solid die-cast forms in subtle sensuous shapes punctuate LED illumination with precision, in perfect architectural harmony.

7222

Shear Small Sconce 4 ¾" H x 3 ½" W

Shade: Die-Cast Aluminum Extension: 3" Wall Plate: 4 3/4" x 3 1/2" Bulb: (1) 7.5W, GU10 Base LED, MR16, (available) WET LOCATION, ADA

7222.72-WL Textured Bronze **7222.74-WL** Textured Gray 7222.98-WL Textured White

7223

Shear Large Sconce 6¼"нх5" w

Shade: Die-Cast Aluminum Extension: 4" Wall Plate: 6 1/4" x 5" Bulb: (1) 11W, LED PAR20, Medium Base (available)

WET LOCATION, ADA

7223.72-WL Textured Bronze **7223.74-WL** Textured Gray **7223.98-WL** Textured White

7220

Elips LED Sconce 5 ¼" н х 6 ¼" w

Shade: Die-Cast Aluminum w/Frosted Optical Acrylic Extension: 3 1/2" Wall Plate: 4 1/2" DIA LED: 10W, 1500 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7220.72-WL Textured Bronze **7220.74-WL** Textured Gray **7220.98-WL** Textured White

7238

Drift Single LED Sconce

4 ¾" H X 6" W Shade: Die-Cast Aluminum Extension: 2 ¾" Wall Plate: 4 3/4" x 6" LED: 13W, 1150 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent WET LOCATION, ADA

Provides either up or down light.

7238.72-WL Textured Bronze **7238.74-WL** Textured Gray 7238.98-WL Textured White

7239

Drift Dual LED Sconce

4 ¾" H x 6" W Shade: Die-Cast Aluminum Extension: 2 ¾" Wall Plate: 4 ¾" x 6" LED: 17W, 1650 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

Provides both up and down light.

7239.72-WL Textured Bronze **7239.74-WL** Textured Gray 7239.98-WL Textured White



Downward LED illumination is cleanly integrated into the edge of a circular disk.

7210

CRCL LED Sconce

Shade: Die-Cast Aluminum w/Frosted Optical Acrylic Extension: 1 ½" Wall Plate: 5" DIA LED: 10W, 1300 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent
WET LOCATION, ADA

7210.72-WL Textured Bronze **7210.74-WL** Textured Gray **7210.98-WL** Textured White



7214

SQR LED Sconce

Shade: Aluminum w/Optical Acrylic Extension: 2" Wall Plate: 6 1/2" sq LED: 15W, 1680 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7214.72-WL Textured Bronze **7214.74-WL** Textured Gray **7214.98-WL** Textured White



Radiant LED light is incorporated within a square geometric fixture.

7214.98-WL

INSIDE-OUT | SONNEMAN.



7216.72-WL Textured Bronze **7216.74-WL** Textured Gray **7216.98-WL** Textured White



luminous rectilinear volume, casting LED illumination in vertical or horizontal orientations.

7216.72-WL

7218.74-WL Textured Gray











Round Exterior Architectural Lighting System

7309

REALS LED Surface Mount 1 ½" to 3 ¼" MAX H X 5" DIA Canopy: 5" DIA LED: 10W, 1040 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent **WET LOCATION, ADA**

Details and finishes on this item p.394

SURFACE MOUNTS

REALS surface-mounted lights are neatly compact and solidly built. They offer a range of lens variations within the tightly defined geometry of their die-cast rings.



REALS

SCONCES

Consider the possibilities of the nearly unlimited opportunities to configure REALS sconces, with lenses and caps, for a variety of LED illuminating possibilities.

7302

REALS Up/Down LED Sconce Extension: 6 1/2" Wall Plate: 4 ½" sq LED: (2) 20W (total), 2080 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION

Details and finishes on this item p.394











REALS

SCONCES

7302

REALS Up/Down LED Sconce Extension: 6 1/2" Wall Plate: 4 1/2" sq LED: (2) 20W (total), 2080 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION

Details and finishes on this item p.394

7300

REALS Downlight LED Sconce Extension: 6 1/2" Wall Plate: 4 ½" sq LED: 10W, 1040 Lumens Warm White (3000K), 90 CRI 120VAC Input w/LED Driver in Outlet Box Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION

Details and finishes on this item p.394





Details and finishes on these items p.394

REALS Round Exterior Architectural Lighting System

Architectural strength from geometric simplicity; engineered for utility and built for performance. This modular system of precision components allows for dozens of possible configurations and lighting effects, inside or out.

REALS SCHEDULE OF CONFIGURATIONS: SCONCES & SURFACE MOUNT

DOWNLIGHT LED SCONCE	Upper Cap/Lens			SURFACE MOUNT		
	Textured Bronze	Dome Cap	Plate Cap		Textured Bronze	
	Dome Lens	7300.DC.DL.72-WL	7300.PC.DL.72-WL		Dome Lens	7309.XX.DL.72-WL
	Clear Cylinder Lens	7300.DC.FH.72-WL	7300.PC.FH.72-WL		Clear Cylinder Lens	7309.XX.FH.72-WL
	White Cylinder Lens	7300.DC.FW.72-WL	7300.PC.FW.72-WL		White Cylinder Lens	7309.XX.FW.72-WL
	Plate Lens	7300.DC.PL.72-WL	7300.PC.PL.72-WL		Plate Lens	7309.XX.PL.72-WL
Bottom Lens	Textured Gray Dome Lens Clear Cylinder Lens White Cylinder Lens Plate Lens	Dome Cap 7300.DC.DL.74-WL 7300.DC.FH.74-WL 7300.DC.FW.74-WL 7300.DC.PL.74-WL	Plate Cap 7300.PC.DL.74-WL 7300.PC.FH.74-WL 7300.PC.FW.74-WL 7300.PC.PL.74-WL	Bottom Lens	Textured Gray Dome Lens Clear Cylinder Lens White Cylinder Lens Plate Lens	7309.XX.DL.74-WL 7309.XX.FH.74-WL 7309.XX.FW.74-WL 7309.XX.PL.74-WL
	Textured White Dome Lens Clear Cylinder Lens White Cylinder Lens Plate Lens	Dome Cap 7300.DC.DL.98-WL 7300.DC.FH.98-WL 7300.DC.FW.98-WL 7300.DC.PL.98-WL	Plate Cap 7300.PC.DL.98-WL 7300.PC.FH.98-WL 7300.PC.FW.98-WL 7300.PC.PL.98-WL		Textured White Dome Lens Clear Cylinder Lens White Cylinder Lens Plate Lens	7309.XX.DL.98-WL 7309.XX.FH.98-WL 7309.XX.FW.98-WL 7309.XX.PL.98-WL

	I						
UP/DOWN LED SCONCE	Upper Cap/Lens						
LLD JCONCL	Textured Bronze Dome Lens Clear Cylinder Lens White Cylinder Lens Plate Lens						
	Dome Lens	7302.DL.DL.72-WL	7302.FH.DL.72-WL	7302.FW.DL.72-WL	7302.PL.DL.72-WL		
	Clear Cylinder Lens	7302.DL.FH.72-WI	7302.FH.FH.72-WI	7302.FW.FH.72-WI	7302.PL.FH.72-WI		
	White Cylinder Lens	7302.DL.FW.72-WI	7302.FH.FW.72-WI	7302.FW.FW.72-WI	7302.PL.FW.72-WI		
	Plate Lens	7302.DL.PL.72-WL	7302.FH.PL.72-WL	7302.FW.PL.72-WL	7302.PL.PL.72-WL		
	Textured Gray	Dome Lens	Clear Cylinder Lens	White Cylinder Lens	Plate Lens		
ens	Dome Lens	7302.DL.DL.74-WL	7302.FH.DL.74-WL	7302.FW.DL.74-WL	7302.PL.DL.74-WL		
J mc	Clear Cylinder Lens	7302.DL.FH.74-WL	7302.FH.FH.74-WL	7302.FW.FH.74-WL	7302.PL.FH.74-WL		
3ottom Lens	White Cylinder Lens	7302.DL.FW.74-WL	7302.FH.FW.74-WL	7302.FW.FW.74-WL	7302.PL.FW.74-WL		
	Plate Lens	7302.DL.PL.74-WL	7302.FH.PL.74-WL	7302.FW.PL.74-WL	7302.PL.PL.74-WL		
	Textured White	Dome Lens	Clear Cylinder Lens	White Cylinder Lens	Plate Lens		
	Dome Lens	7302.DL.DL.98-WL	7302.FH.DL.98-WL	7302.FW.DL.98-WL	7302.PL.DL.98-WL		
	Clear Cylinder Lens	7302.DL.FH.98-WL	7302.FH.FH.98-WL	7302.FW.FH.98-WL	7302.PL.FH.98-WL		
	White Cylinder Lens	7302.DL.FW.98-WL	7302.FH.FW.98-WL	7302.FW.FW.98-WL	7302.PL.FW.98-WL		
	Plate Lens	7302.DL.PL.98-WL	7302.FH.PL.98-WL	7302.FW.PL.98-WL	7302.PL.PL.98-WL		

REALS Cap and Lens Options



Plate Cap - PC Die-Cast Aluminum



Dome Cap - DC Die-Cast Aluminum



Plate Lens - PL UV-Stabilized Polycarbonate



Dome Lens - DL UV-Stabilized Polycarbonate



White Cylinder Lens - FW UV-Stabilized Polycarbonate



Clear Cylinder Lens - FH UV-Stabilized Polycarbonate




Plate Cap - PC Die-Cast Aluminum



LED Fixture Ring Die-Cast Aluminum



White Cylinder Lens - FW UV-Stabilized Polycarbonate

Round Exterior Architectural Lighting System



REALS Bollards offer a broad range of configurations, with many available options for lenses, caps, and heights for a variety of LED illuminating possibilities.



7303

REALS 16" LED Bollard

WET LOCATION

16" to 17 3/4" MAX H X 5" W X 7 3/4" D Base: 1/4" H x 4" DIA LED: 10W, 1040 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

Details and finishes on this item p.399

7304

REALS 22" LED Bollard

22" to 23 ¾" MAX H X 5" W X 7 ¾" D Base: 1/4" H x 4" DIA LED: 10W, 1040 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming WET LOCATION

Details and finishes on this item p.399

7305

REALS 28" LED Bollard

28" to 29 34" MAX H X 5" W X 7 34" D Base: 1/4" H x 4" DIA LED: 10W, 1040 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION

Details and finishes on this item p.399

7306

REALS 16" LED Double Bollard

16" to 17 3/4" MAX H X 5" W X 13 1/2" D Base: ¼" н x 4" DIA LED (2): 20W (total), 2080 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION

Details and finishes on this item p.399

7307

REALS 22" LED Double Bollard

22" to 23 ¾" MAX H X 5" W X 13 ½" D Base: 1/4" H x 4" DIA LED (2): 20W (total), 2080 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming WET LOCATION

Details and finishes on this item p.399

7308

REALS 28" LED Double Bollard

28" to 29 34" MAX H X 5" W X 13 1/2" D Base: 1/4" H x 4" DIA LED (2): 20W (total), 2080 Lumens Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION

Details and finishes on this item p.399

12VAC Power supply required, sold separately. Consult Website for requirements and available options. 12VAC Power supply required, sold separately. Consult Website for requirements and available options.



REALS SCHEDULE OF CONFIGURATIONS: bollards

12VAC Power supply required, sold separately. Consult Website for requirements and available options.

REA	LS SCHEDU	JLE OF CONFIG	JURATIONS: L	Marus	requirements an	d available options.
16" BOLLARD Upper Cap				16" DOUBLE BOLLARI	Hanar Can	
Tex	ctured Bronze	Dome Cap	Plate Cap	Textured Bronze	Upper Cap Dome Cap	Plate Cap
	me Lens	7303.DC.DL.72-WL	7303.PC.DL.72-WL	Dome Lens	7306.DC.DL.72-WL	7306.PC.DL.72-WL
Cle	ar Cylinder Lens	7303.DC.FH.72-WL	7303.PC.FH.72-WL	Clear Cylinder Lens	7306.DC.FH.72-WL	7306.PC.FH.72-WL
	ite Cylinder Lens	7303.DC.FW.72-WL	7303.PC.FW.72-WL	White Cylinder Lens	7306.DC.FW.72-WL	7306.PC.FW.72-WL
Dlat	te Lens	7303.DC.PL.72-WL	7303.PC.PL.72-WL	Plate Lens	7306.DC.PL.72-WL	7306.PC.PL.72-WL
Lens						
Bottom Lens Tex						
Tex	ctured Gray	Dome Cap	Plate Cap	Textured Gray	Dome Cap	Plate Cap
Doi	me Lens	7303.DC.DL.74-WL	7303.PC.DL.74-WL	Dome Lens	7306.DC.DL.74-WL	7306.PC.DL.74-WL
Cle	ar Cylinder Lens	7303.DC.FH.74-WL	7303.PC.FH.74-WL	Clear Cylinder Lens	7306.DC.FH.74-WL	7306.PC.FH.74-WL
Wh	ite Cylinder Lens	7303.DC.FW.74-WL	7303.PC.FW.74-WL	White Cylinder Lens	7306.DC.FW.74-WL	7306.PC.FW.74-WL
Plat	te Lens	7303.DC.PL.74-WL	7303.PC.PL.74-WL	Plate Lens	7306.DC.PL.74-WL	7306.PC.PL.74-WL
22"	22" BOLLARD		22" DOUBLE BOLLARD			
		Upper Cap			Upper Cap	
	ctured Bronze	Dome Cap	Plate Cap	Textured Bronze	Dome Cap	Plate Cap
	me Lens	7304.DC.DL.72-WL	7304.PC.DL.72-WL	Dome Lens	7307.DC.DL.72-WL	7307.PC.DL.72-WL
	ar Cylinder Lens	7304.DC.FH.72-WL	7304.PC.FH.72-WL	Clear Cylinder Lens	7307.DC.FH.72-WL	7307.PC.FH.72-WL
	nite Cylinder Lens	7304.DC.FW.72-WL	7304.PC.FW.72-WL	White Cylinder Lens	7307.DC.FW.72-WL	7307.PC.FW.72-WL
Plat	te Lens	7304.DC.PL.72-WL	7304.PC.PL.72-WL	Plate Lens	7307.DC.PL.72-WL	7307.PC.PL.72-WL
Bottom Lens						
[∞] Tex	ctured Gray	Dome Cap	Plate Cap	Textured Gray	Dome Cap	Plate Cap
Doi	me Lens	7304.DC.DL.74-WL	7304.PC.DL.74-WL	Dome Lens	7307.DC.DL.74-WL	7307.PC.DL.74-WL
Cle	ar Cylinder Lens	7304.DC.FH.74-WL	7304.PC.FH.74-WL	Clear Cylinder Lens	7307.DC.FH.74-WL	7307.PC.FH.74-WL
Wh	nite Cylinder Lens	7304.DC.FW.74-WL	7304.PC.FW.74-WL	White Cylinder Lens	7307.DC.FW.74-WL	7307.PC.FW.74-WL
Pla	te Lens	7304.DC.PL.74-WL	7304.PC.PL.74-WL	Plate Lens	7307.DC.PL.74-WL	7307.PC.PL.74-WL
28"	28" BOLLARD		28" DOUBLE BOLLARD			
-		Upper Cap	DI L C	T . ID	Upper Cap	DI . C
	ctured Bronze	Dome Cap	Plate Cap	Textured Bronze	Dome Cap	Plate Cap
	me Lens	7305.DC.DL.72-WL	7305.PC.DL.72-WL	Dome Lens	7308.DC.DL.72-WL	7308.PC.DL.72-WL
	ar Cylinder Lens	7305.DC.FH.72-WL	7305.PC.FH.72-WL	Clear Cylinder Lens	7308.DC.FH.72-WL	7308.PC.FH.72-WL
	nite Cylinder Lens	7305.DC.FW.72-WL	7305.PC.FW.72-WL	White Cylinder Lens	7308.DC.FW.72-WL	7308.PC.FW.72-WL
Bottom Lens	te Lens	7305.DC.PL.72-WL	7305.PC.PL.72-WL	Plate Lens	7308.DC.PL.72-WL	7308.PC.PL.72-WL
ĕ Tex	ctured Gray	Dome Cap	Plate Cap	Textured Gray	Dome Cap	Plate Cap
Doi	me Lens	7305.DC.DL.74-WL	7305.PC.DL.74-WL	Dome Lens	7308.DC.DL.74-WL	7308.PC.DL.74-WL
Cle	ar Cylinder Lens	7305.DC.FH.74-WL	7305.PC.FH.74-WL	Clear Cylinder Lens	7308.DC.FH.74-WL	7308.PC.FH.74-WL
Wh	ite Cylinder Lens	7305.DC.FW.74-WL	7305.PC.FW.74-WL	White Cylinder Lens	7308.DC.FW.74-WL	7308.PC.FW.74-WL
Plat	te Lens	7305.DC.PL.74-WL	7305.PC.PL.74-WL	Plate Lens	7308.DC.PL.74-WL	7308.PC.PL.74-WL



square curve®

SCONCE

A subtle concave curve, set into a rectilinear frame, reflects a beautiful grazing LED light from within its interior top edge. 7360

Square Curve LED Sconce

7" sQ
Shade: Aluminum
4 ½" H x 6" w x 2" D
Extension: 2 ¾"
Wall Plate: 6 ½" sQ x ¾" D
LED: 10W, 990 Lumens (300 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or
Standard (TRIAC) Incandescent

7360.72-WL Textured Bronze **7360.74-WL** Textured Gray **7360.98-WL** Textured White

WET LOCATION, ADA

Bollards: 12VAC Power supply required, sold separately. Consult website for requirements and available options.

7361

Square Curve 16" LED Bollard

16" H x 7" w x 2" D Shade: Aluminum 4" H x 6" w x 2" D Base: ¼" H x 8" w x 3" D LED: 12W, 990 Lumens (210 Net Lumens) Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION

7361.72-WL Textured Bronze **7361.74-WL** Textured Gray

7362

Square Curve 22" LED Bollard

22" H X 7" W X 2" D

Shade: Aluminum
4" H X 6" W X 2" D

Base: ¼" H X 8" W X 3" D

LED: 12W, 990 Lumens (210 Net Lumens)

Warm White (3000K), 90 CRI

12VAC Input

Non-Dimming

WET LOCATION

7362.72-WL Textured Bronze **7362.74-WL** Textured Gray

7363

Square Curve 28" LED Bollard

28" H x 7" w x 2" D Shade: Aluminum 4" H x 6" w x 2" D Base: ¼" H x 8" w x 3" D LED: 12W, 990 Lumens (210 Net Lumens) Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION

7363.72-WL Textured Bronze **7363.74-WL** Textured Gray

INSIDE-OUT | SONNEMAN



light frames®

7366.72-WL 7365.72-WL

7365

Light Frames 16" LED Bollard

16" н х 7" w х 2" D Shade: Aluminum Base: ¼" н x 8" w x 3" D LED: 12W, 990 Lumens (290 Net Lumens) Warm White (3000K), 90 CRI 12VAC Input Non-Dimming

WET LOCATION **7365.72-WL** Textured Bronze

7365.74-WL Textured Gray



square column®

Square columns of light emit the glow of smoothly reflected LED illumination. Available in three bollard heights, and in a wall mounted configuration with a recessed downlight, Square Columns set a crisp architectural rhythm to an exterior landscape.



7373.72-WL

7370.74-WL Textured Gray 7370.98-WL Textured White

Bollards: 12VAC Power supply required, sold separately. Consult website for requirements and available options.

square column®

round column®



7383

Square Column 28" LED Bollard

28" H x 3" sq Shade: UV-Stabilized White Polycarbonate 6" н x 3" sq Base: 1/4" H x 4" sq

Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7383.72-WL Textured Bronze **7383.74-WL** Textured Gray

7382

Square Column 22" LED Bollard

22" н x 3" sq Shade: UV-Stabilized White Polycarbonate 6" н x 3" sq Base: 1/4" H x 4" sq

Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7382.72-WL Textured Bronze **7382.74-WL** Textured Gray

7381

Square Column 16" LED Bollard

. 16" н х 3" sq Shade: UV-Stabilized White Polycarbonate 6" н х 3" sq Base: 1/4" H x 4" sq Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7381.72-WL Textured Bronze **7381.74-WL** Textured Gray

7373

Round Column 28" LED Bollard

28" h x 3" dia Shade: UV-Stabilized White Polycarbonate 6" H X 3" DIA Base: 1/4" H x 4" DIA Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7373.72-WL Textured Bronze **7373.74-WL** Textured Gray

7372

Round Column 22" LED Bollard

22" H X 3" DIA Shade: UV-Stabilized White Polycarbonate 6" H X 3" DIA Base: 1/4" H x 4" DIA Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7372.72-WL Textured Bronze **7372.74-WL** Textured Gray

7371

Round Column 16" LED Bollard

16" h x 3" dia Shade: UV-Stabilized White Polycarbonate 6" H X 3" DIA Base: 1/4" H x 4" DIA Bulb: (1) 7.5W, GU5.3 Base LED, MR16 (available) 12VAC Input

WET LOCATION

7371.72-WL Textured Bronze **7371.74-WL** Textured Gray

12VAC Power supply required, sold separately. Consult website for requirements and available options. 12VAC Power supply required, sold separately. Consult website for requirements and available options.

shear

Geometric solids, in unity with rectilinear columns, form singlesided and double-sided LED illuminated bollards that compose the dramatic impact of crisp simplicity.









7321

Triform Compact 16" LED Bollard

7322

Triform Compact 22" LED Bollard 22" H X 3 ½" W X 3 ¼" D

7323

Triform Compact 28" LED Bollard

28" H x 3 ½" W x 3 ¼" D Shade: Die-Cast Aluminum 4 ½" н x 3 ½" w x 2" D Base: ¼" н x 5 ½" w x 3 ¼" D LED: 10W, 980 Lumens (385 Net Lumens) Warm White (3000K), 90 CRI

12VAC Input Non-Dimming

410

WET LOCATION

7321.72-WL Textured Bronze **7321.74-WL** Textured Gray **7322.72-WL** Textured Bronze **7322.74-WL** Textured Grav **7323.72-WL** Textured Bronze **7323.74-WL** Textured Gray

7311

Shear 16" LED Bollard 16" H X 3 1/2" W X 4 1/4" D

7312

Shear 22" LED Bollard

22" H X 3 ½" W X 4 ¼" D

7313

Shear 28" LED Bollard

28" H X 3 ½" W X 4 ¼" D Shade: Die-Cast Aluminum 4 ¾" H X 3 ½" W X 3" D Base: ¼" н x 5 ½" w x 3 ¼" D Bulb: (1) 9W, GU5.3 Base LED MR16 (available) 12VAC Input

WET LOCATION

7311.72-WL Textured Bronze **7311.74-WL** Textured Gray 7312.72-WL Textured Bronze **7312.74-WL** Textured Gray **7313.72-WL** Textured Bronze **7313.74-WL** Textured Gray

7341

Box 16" LED Bollard 16" H x 3 ½" W x 3 ¼" D

7342

Box 22" LED Bollard 22" H x 3 ½" W x 3 ¼" D

7343

Box 28" LED Bollard

28" H x 3 1/2" W x 3 1/4" D Shade: Die-Cast Aluminum 4 ½" н x 3 ½" w x 2" D Base: ¼" н x 5 ½" w x 3 ¼" D LED: 10W, 1020 Lumens (645 Net Lumens) Warm White (3000K), 90 CRI 12VAC Input Non-Dimming WET LOCATION

7341.72-WL Textured Bronze **7341.74-WL** Textured Gray **7342.72-WL** Textured Bronze **7342.74-WL** Textured Grav 7343.72-WL Textured Bronze **7343.74-WL** Textured Gray

12VAC Power supply required, sold separately. Consult Website for requirements and available options. 7325

Triform Compact 16" LED Double Bollard

7326

Triform Compact 22" LED Double Bollard 22" H X 3 ½" W X 5 ¼" D

7327

Triform Compact 28" LED Double Bollard

28" H X 3 ½" W X 5 ¼" D Shade: Die-Cast Aluminum 4 ½" н x 3 ½" w x 2" D Base: ¼" н x 5 ½" w x 3 ¼" p LED: (2) 20W (total), 1900 Lumens (745 Net Lumens) Warm White (3000K), 90 CRI 12VAC Input

Non-Dimmino WET LOCATION

7325.74-WL Textured Gray **7326.72-WL** Textured Bronze **7326.74-WL** Textured Grav **7327.72-WL** Textured Bronze **7327.74-WL** Textured Gray

7325.72-WL Textured Bronze

12VAC Power supply required, sold separately. Consult Website for requirements and available options. 7345

22" H x 3 ½" W x 5 ¼" D

Shear 28" LED Double Bollard

Shear 16" LED Double Bollard

Shear 22" LED Double Bollard

16" н x 3 ½" w x 7 ¼" D

22" H x 3 ½" W x 7 ¼" D

28" H x 3 ½" W x 7 ¼" D

Shade: Die-Cast Aluminum 4 ¾" H X 3 ½" W X 3" D Base: ¼" H x 5 ½" w x 3 ¼" D Bulb: (2) 9W, GU5.3 Base LED MR16 (available)

12VAC Input

WET LOCATION

7315

7316

7317

7315.72-WL Textured Bronze **7315.74-WL** Textured Gray **7316.72-WL** Textured Bronze **7316.74-WL** Textured Gray **7317.72-WL** Textured Bronze **7317.74-WL** Textured Gray

Box 16" LED Double Bollard

7346

Box 22" LED Double Bollard

7347

Box 28" LED Double Bollard

28" H x 3 ½" W x 5 ¼" D Shade: Die-Cast Aluminum 4 ½" н x 3 ½" w x 2" D

Base: ¼" н x 5 ½" w x 3 ¼" D LED: (2) 20W (total), 2000 Lumens (1265 Net Lumens) Warm White (3000K), 90 CRI


12VAC Input Non-Dimming

WET LOCATION

7345.72-WL Textured Bronze **7345.74-WL** Textured Gray 7346.72-WL Textured Bronze **7346.74-WL** Textured Grav 7347.72-WL Textured Bronze **7347.74-WL** Textured Gray





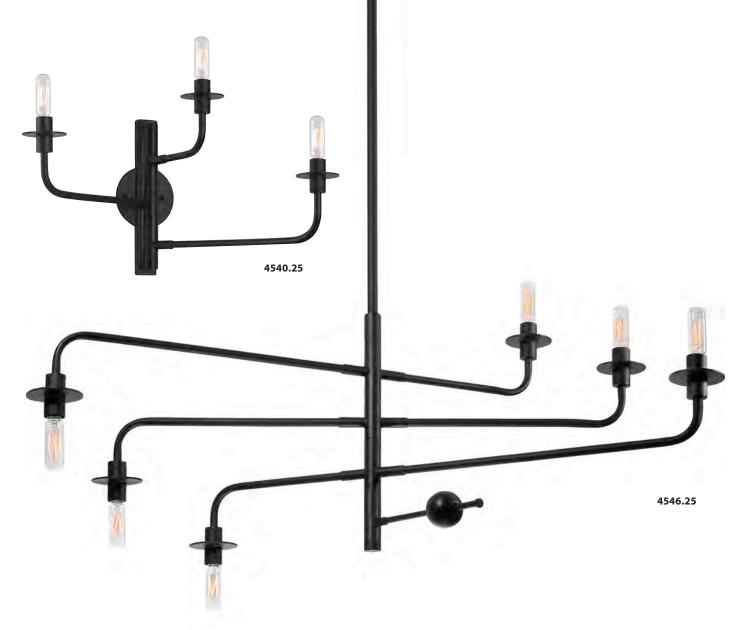

4548

Atelier 8-Light Pendant

16 ¾" H x 60" DIA

Canopy: 6" DIA W/Hang Straight
Stem Kit: (3) 12" + (1) 6"

Bulb: (8) 60W Candelabra Base
Shown with available 40W Vintage Carbon Filament T8 Bulb

4548.25 Satin Black

4546

Atelier 6-Light Pendant

15 ¾" H × 40 ¼" DIA

Canopy: 6" DIA W/Hang Straight
Stem Kit: (3) 12" + (1) 6"

Bulb: (6) 60W Candelabra Base
Shown with available 40W Vintage
Carbon Elamont 19 Bulb Carbon Filament T8 Bulb

4546.25 Satin Black

4540

Atelier Sconce 12 ¾" H x 19" W Extension: 17 ¾" Wall Plate: 11" x 4 ½" Bulb: (3) 60W Candelabra Base Shown with available 40W Vintage Carbon Filament T8 Bulb

4540.25 Satin Black





soho

The metaphor of an industrial loft reclaimed from its historical grit is refined, glorified, and transformed to the aesthetic of the ultimate urban sophistication. It is the modern art of renewal.







4953

Soho 3-Light Bar Pendant 14 ½" H x 53 ¾" W x 14" D

Shade: Cotton, 6" H x 14" DIA w/White Glass Diffuser Canopy: 4 ½" x 23 ½" w/Hang Straight Stem Kit: (6) 12" + (2) 6" Bulb: (6) 60W Medium Base

4953.25 Satin Black w/Black Shade

4950

Soho 1-Light Sconce

Shade: Cotton, 6" H X 8" DIA w/White Glass Diffuser Extension: 8 1/2" Wall Plate: 4 1/2" DIA Bulb: (1) 60W Medium Base

4950.25 Satin Black w/Black Shade **4950.35** Polished Nickel

w/White Shade

4951

Soho 2-Light Sconce

11 ¼" H x 20 ¼" W Shade: Cotton, 6" H X 8" DIA w/White Glass Diffuser Extension: 8 1/2" Wall Plate: 4 1/2" DIA Bulb: (2) 60W Medium Base

4951.25 Satin Black w/Black Shade





4066

Tuxedo 6-Light Round Pendant 14 ½" H x 24 ½" DIA Shade: Clear Glass 9 ½" h x 3 ½" dia Canopy: 5" DIA W/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (6) 60W Candelabra Base

4066.54 Polished Chrome & Black

4065

Tuxedo 5-Light Bar Pendant 14 ½" H x 34" W x 5" D

Shade: Clear Glass 9 ½" h x 3 ½" dia Canopy: 10" x 6 ½" w/Hang Straight Stem Kit: (6) 12" + (2) 6" Bulb: (5) 60W Candelabra Base

4065.54 Polished Chrome & Black

4062

Tuxedo Double Sconce

Shade: Clear Glass 9 ½" h x 3 ½" dia Extension: 6 1/2" Wall Plate: 10" x 4 1/2" Bulb: (2) 60W Candelabra Base


4062.54 Polished Chrome & Black

4060

Tuxedo Sconce

Shade: Clear Glass 9 ½" h x 3 ½" dia Extension: 6 1/2" Wall Plate: 10" x 4 1/2" Bulb: (1) 60W Candelabra Base

4060.54 Polished Chrome & Black

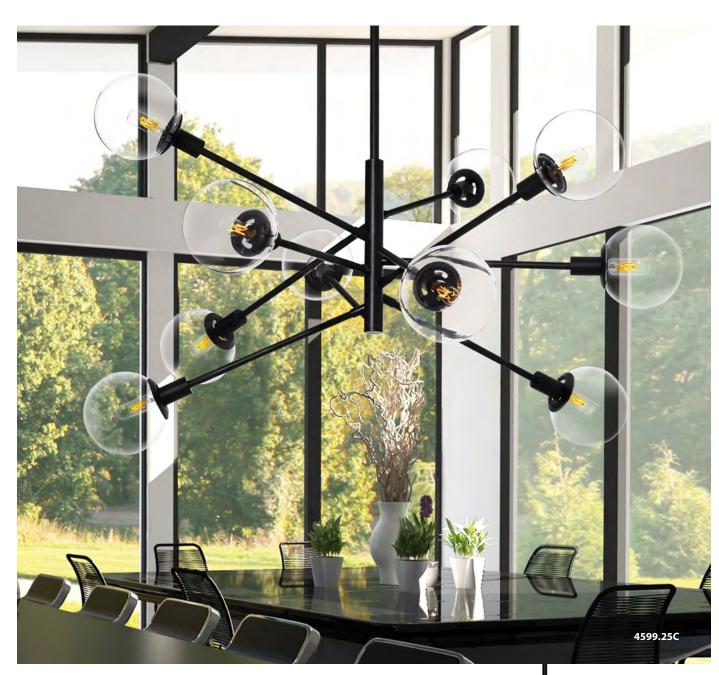

orb vectors

4599

Orb Vectors 10-Light Pendant 23 ½" H x 38 ½" DIA

Shade: Clear Glass 5 ½" dia Canopy: 5" DIA w/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (10) 60W Candelabra Base Shown with available 40W Vintage Carbon Filament T8 Bulb

4599.25C Satin Black

4595

Orb Vectors 5-Light Pendant 20 1/4" H x 38 1/2" DIA Shade: Clear Glass 5 ½" dia Canopy: 5" DIA W/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (5) 60W Candelabra Base Shown with available 40W Vintage Carbon Filament T8 Bulb

4595.25C Satin Black





4591

Orb Pendant

4591.01H

4591.01C

9" h x 5 ½" dia Shade: Glass, 5 1/2" DIA Canopy: 4 ½" DIA w/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Candelabra Base

Shown with available 40W Vintage Carbon Filament T8 Bulb

4591.01C Polished Chrome w/Clear Glass **4591.01H** Polished Chrome w/Half-Mercury Glass 4598

Orb 10-Light Radial Pendant 5 ½" H x 32" DIA Shade: Glass, 5 ½" DIA Canopy: 4 ½" DIA w/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (10) 60W Candelabra Base Shown with available 40W Vintage Carbon Filament T8 Bulb

4598.01C Polished Chrome w/Clear Glass

CONTEMPORARY CLASSICS | SONNEMAN 421





level

4756

Level Pendant

25 ¾" H x 8" DIA Shade: Clear Glass 24" h x 6 1/2" dia Wire Mesh Diffuser Included Canopy: 5" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base Shown with available 60W Vintage T10 Bulb

4756.25 Satin Black

sky

4751

Sky Pendant

25 34" H X 6" DIA Shade: Clear Glass 24" h x 6" dia Canopy: 5" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base Shown with available 60W Vintage T10 Bulb

4751.25 Satin Black

bleecker street

4011

Bleecker Street Pendant

18 ½" h x 9" dia Shade: Clear Glass 14 ½" h x 8" dia Canopy: 5" DIA W/10' Adjustable Cord Bulb: (1) 60W Medium Base Shown with 30W T9 Smoke Bulb

4011.25C Satin Black

square ring

4761

Square Ring 1-Light Pendant

12 ½" н х 9" w х 9" D Shade: Clear Glass 12 ½" h x 6 ½" dia Canopy: 5" sq w/10' Adjustable Dark Red Silk Covered Cord Bulb: (1) 60W Medium Base

4761.25 Satin Black

urban edge™

Uptown sophistication with a Downtown edge allows the glow of this helix filament to radiate through the texture of black wire mesh. The grit of the hip urban edge is captured in the coolness of the Urban Edge pendants that can be used singularly or in infinite clusters.







4941

Urban Edge 1-Light Pendant

17 ½" H X 2 ¾" DIA Shade: Black Wire Mesh 10" h x 2 ¾" dia Canopy: 5" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base

4941.97 Textured Black

4941-5

Urban Edge 5-Light Pendant

17 ½" h x 12" dia Shade: Black Wire Mesh 10" H X 2 ¾" DIA Canopy: 12" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (5) 60W Medium Base Shown with available 60W Helix Filament T10 Bulb

4941.97-5 Textured Black

4944

Urban Edge 2-Light Sconce

24" H x 5" W Shade: Black Wire Mesh 10" h x 2 ¾" dia Extension: 4" Wall Plate: 5" sq Bulb: (2) 60W Medium Base Shown with available 60W Helix Filament T10 Bulb

4944.97 Textured Black

4942

Urban Edge Sconce

14 ¼" H x 5" W Shade: Black Wire Mesh 10" h x 2 ¾" dia Extension: 4" Wall Plate: 5" DIA Bulb: (1) 60W Medium Base ADA Shown with available 60W Helix Filament T10 Bulb

4942.97 Textured Black

4943

Urban Edge Panel Sconce

16" н x 5" w Shade: Black Wire Mesh 10" h x 2 ¾" dia Extension: 4" Wall Plate: 16" x 5" Bulb: (1) 60W Medium Base ADA Shown with available 60W Helix Filament T10 Bulb

4943.97 Textured Black

4945

4943.97

Urban Edge 2-Light Panel Sconce

26" H x 5" W Shade: Black Wire Mesh 10" h x 2 ¾" dia Extension: 4" Wall Plate: 26" x 5" Bulb: (2) 60W Medium Base

Shown with available 60W Helix Filament T10 Bulb

4945.97 Textured Black

tribeca

Industrial honesty and straightforward simplicity defines the sophisticated urban space.



4933

Tribeca 12" Pendant

14 ½" h x 12" dia Shade: Clear Glass, 12" DIA w/Wire Mesh Diffuser Canopy: 6" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base Shown with 30W T9 Smoke Bulb

4933.97 Textured Black

4932

Tribeca 10" Pendant

12 ½" h x 10" dia Shade: Clear Glass, 10" DIA w/Wire Mesh Diffuser Canopy: 6" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base

4932.97 Textured Black



4932.97

4931

Tribeca 12" Sconce

18 ¾" H x 12" W Shade: Clear Glass, 12" DIA w/Wire Mesh Diffuser Extension: 13" Wall Plate: 6" DIA Bulb: (1) 60W Medium Base Shown with 30W T9 Smoke Bulb

4931.97 Textured Black

4930

Tribeca 10" Sconce 16 1/4" H × 10" W Shade: Clear Glass, 10" DIA w/Wire Mesh Diffuser Extension: 12" Wall Plate: 6" DIA Bulb: (1) 60W Medium Base

4930.97 Textured Black



zylinder

A glowing filament radiates through the texture of a perforated chromed cylinder within the shimmering clarity of a larger blown, glass crystal, vase-like tube.





4391 Zylinder Sconce

16" H x 6 ½" W Shade: Clear Glass 11" H X 6" DIA Inner Shade: Perforated Metal Extension: 7" Wall Plate: 5" DIA Switch: High/Low Pull Chain Bulb: (1) 60W Medium Base

4391.57 Chrome/Black

4394

Zylinder 1-Light Pendant 16 ½" H x 6 ½" DIA Shade: Clear Glass 11" H x 6" DIA Inner Shade: Perforated Metal Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 60W Medium Base

4394.57 Chrome/Black

4395

Zylinder 3-Light Pendant

w/Round Canopy 16 ½" H x 13" DIA

Shade: Clear Glass 11" h x 6" dia Inner Shade: Perforated Metal Canopy: 15" DIA w/10' Adjustable Cord Bulb: (3) 60W Medium Base

4395.57 Chrome/Black

4399

4395.57

Zylinder 8-Light Pendant

w/Round Canopy 16 ½" H x 27" DIA Shade: Clear Glass 11" H X 6" DIA Inner Shade: Perforated Metal Canopy: 24" DIA w/10' Adjustable Cord Bulb: (8) 60W Medium Base

4399.57 Chrome/Black







chelsea

Suspended from its black silk covered cord and held by its industrial socket, Chelsea's historic carbon filament lamp is encapsulated in a voluptuous glass form that echoes its classic shape. The honesty of its functional construction and the simplicity of its purpose affirm the authenticity of the Chelsea pendant.

4291

Chelsea 1-Light Pendant 8 3/4" H X 4 1/2" DIA Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Canopy: 5" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (1) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4291.25 Satin Black

4294

Chelsea 3-Arm Pendant

4294.25 Satin Black

17" H x 15" DIA Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Canopy: 5" DIA W/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (3) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Canopy: 9 ½" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (3) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4293.25 Satin Black

6 1/4" H X 4 1/2" DIA Canopy: 14" DIA W/10' Adjustable Black Silk Covered Cord Bulb: (5) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4295.25 Satin Black









4289.25

4290

Chelsea Sconce

14" H x 4 ½" W Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Extension: 7 1/4" Wall Plate: 6" x 4 1/4" w/Black Silk Covered Cord Bulb: (1) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4290.25 Satin Black

4286

Chelsea Bath Sconce Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Extension: 7 1/2" Wall Plate: 6" x 5 1/4" Bulb: (1) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4286.25 Satin Black

4287

Chelsea 2-Light Bath Bar

Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Extension: 7 1/2" Wall Plate: 6" x 12 1/4" Bulb: (2) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4287.25 Satin Black

4288

Chelsea 3-Light Bath Bar 12 ½" H x 19 ¼" W

Shade: Clear Glass 6 1/4" H X 4 1/2" DIA Extension: 7 ½" Wall Plate: 6" x 19 1/4" Bulb: (3) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4288.25 Satin Black

4289

Chelsea 4-Light Bath Bar 12 ½" H × 26 ¼" W Shade: Clear Glass 6 ¼" н x 4 ½" dia Extension: 7 1/2" Wall Plate: 6" x 26 1/4" Bulb: (4) 60W Medium Base Shown with available 60W Vintage Carbon Filament Bulb

4289.25 Satin Black

teardrop

Teardrop is inspired by the streamlined organic form of a teardrop falling through air. These hand-blown Teardrop pendants slip easily into a dramatic entrance or soft contemporary setting.



4840.01C





4843

Teardrop 3-Light Pendant 18" H x 12 1/2" DIA Shade: Glass 12" h x 4" dia Canopy: 12" DIA W/10' Adjustable Cord Bulb: (3) 40W Medium Base

4843.01C Polished Chrome w/Clear Glass

4841

Teardrop Sconce

Shade: Glass 12" H X 4" DIA Extension: 5 1/2" Wall Plate: 5" DIA Bulb: (1) 40W Medium Base

4841.01C Polished Chrome w/Clear Glass

Special Order:

4841.01W Polished Chrome w/White

Etched Cased Glass

CONTEMPORARY CLASSICS | SONNEMAN 435

4840

Shade: Glass

12" h x 4" dia

Teardrop 1-Light Pendant 18" H x 4" DIA

Bulb: (1) 40W Medium Base

Canopy: 5" DIA W/10' Adjustable Cord

4840.01C Polished Chrome w/Clear Glass

bubbles

Playful, formal, casual yet classic, Bubbles is an iconic, Mid-Century Modern lighting design of infinite variety and proportions. Its as its aesthetic basis.





3768

Bubbles 8-Light Pendant

22" H X 23" DIA Shade: Clear Glass Globe Sizes Include: (3) 8" dia, (3) 10" dia, (2) 12" dia Canopy: 18" DIA w/10' Adjustable Cords Bulb: (8) 60W Medium Base Shown with 60W G25 Bulb

3768.35 Polished Nickel

3760

Bubbles 8" 1-Light Pendant

22" H X 8" DIA Shade: Clear Glass 8" H X 8" DIA Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 60W Medium Base

3760.35 Polished Nickel

3761

Bubbles 10" 1-Light Pendant

22" H X 10" DIA Shade: Clear Glass 10" H X 10" DIA Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 60W Medium Base **3761.35** Polished Nickel

3762

Bubbles 12" 1-Light Pendant

22" H X 12" DIA Shade: Clear Glass 12" h x 12" dia Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 60W Medium Base

3762.35 Polished Nickel

3763

Bubbles 3-Light Pendant

22" H X 17" DIA Shade: Clear Glass Globe Sizes Include: (1) 8" dia, (1) 10" dia, (1) 12" dia Canopy: 12" DIA W/10' Adjustable Cords Bulb: (3) 60W Medium Base Shown with 60W G25 Bulb

3763.35 Polished Nickel

3765

Bubbles 5-Light Pendant

22" H X 21" DIA Shade: Clear Glass Globe Sizes Include: (2) 8" dia, (2) 10" dia, (1) 12" dia Canopy: 16" DIA w/10' Adjustable Cords Bulb: (5) 60W Medium Base Shown with 60W G25 Bulb

3765.35 Polished Nickel





4781

Apollo Pendant

16" H X 10" DIA

Shade: Half-Mercury Glass

14" H X 10" DIA

Canopy: 5" DIA w/10' Adjustable Cord
Bulb: (1) 60W Medium Base

Shown with available 60W Vintage Carbon Filament Bulb

4781.01 Polished Chrome

4780

Apollo Sconce Shade: Half-Mercury Glass 14" H x 10" DIA Extension: 12 1/4" Wall Plate: 6" DIA
Bulb: (1) 60W Medium Base
Shown with available 60W Vintage Carbon Filament Bulb

4780.01 Polished Chrome

apollo









4802.01

castelli

Castelli's uniqueness derives from a beautifully shaped glass in suspension from stainless steel cable. Castelli's open design invests contemporary freshness and projects sophistication into your home or architecture.

3294

Castelli Pendant

27" H x 12" DIA
Shade: Clear Glass
13" H x 12" DIA
Canopy: 5" DIA
w/10' Adjustable Cables
Bulb: (1) 60W Medium Base

3294.35C Polished Nickel

4802

Transparence 1-Light Pendant 10" H X 7" DIA

10" H x 7" DIA
Shade: Clear Glass
4 1/2" H x 7" DIA
Canopy: 5" DIA w/10' Adjustable Cord
Bulb: (1) 60W Medium Base
Shown with 60W Half-Chrome Bulb

4802.01 Polished Chrome

4800

Transparence Surface Mount

7" H X 7" DIA
Shade: Clear Glass
4 ½" H X 7" DIA
Canopy: 5" DIA
Bulb: (1) 60W Medium Base
Shown with 60W Half-Chrome Bulb

4800.01 Polished Chrome

transparence

4801

Transparence Sconce

8" H X 7" W
Shade: Clear Glass
4 ½" H X 7" DIA
Extension: 10"
Wall Plate: 5" DIA
Bulb: (1) 60W Medium Base
Shown with 60W Half-Chrome Bulb

4801.01 Polished Chrome





Cool, elegant, and daring, Delano's ultra simplicity brings visual lightness from its stark minimalism yet radiates warmth from a single lamp that shines pristinely in the air of its open crystal cylinder.

3690

Delano Sconce

8 ¾" H x 7 ¾" W Shade: 7 ¾" H x 7 ¾" DIA Extension: 8 1/2" Wall Plate: 8 3/4" x 4"

Bulb: (1) 75W Medium Base **3690.01C** Polished Chrome

w/Clear Glass Shade

3690.01W Polished Chrome w/White Etched Cased Glass Shade



3690.01W





3715

Link Sconce

5 ¾" H x 8" W Shade: White Etched Cased Glass 5 ¼" н x 8" w x 3 ½" D Extension: 4" Wall Plate: 5 1/2" x 4 1/2" Bulb: (2) 50W Xenon G9 Base (included) ADA

3715.01 Polished Chrome

3716

Link LED Sconce

5 ¾" H x 8" W Shade: White Etched Cased Glass 5 ¼" н х 8" w х 3 ½" р Extension: 4" Wall Plate: 5 1/2" x 4 1/2" LED: 5W, 400 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3716.01 Polished Chrome

3718

Link LED Tall Sconce

13 ½" н x 8" w Shade: White Etched Cased Glass 12" H x 8" W x 3 ½" D Extension: 4" Wall Plate: 13 1/4" x 4 1/2" LED (2): 9W total, 800 Lumens Warm White (3000K), 80 CRI 120VAC Input Voltage w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3718.01 Polished Chrome





Greco shines light on perfect composition. With the shallow curve of the glass diffusing a warm glow, held aloft by a simply detailed bracket, Greco embodies timeless style and compelling design in your living space.

1851

Greco Sconce

14" H x 8" W Shade: Alabaster Glass 8 ½" H x 7" W x 3 ½" D Extension: 4" Wall Plate: 14" x 4 1/2" Bulb: (1) 60W Candelabra Base ADA

1851.13 Satin Nickel

Fluorescent Special Order: (1) 13W SBCFL GU24 Base

1851.13F Satin Nickel



3662

Tangent Square Sconce

16 1/4" H x 6 1/2" W Shade: White Glass 13 ¾" H x 6" W x 3" D Extension: 3 1/2" Wall Plate: 16 1/4" x 6 1/2" Bulb: (3) 60W Candelabra Base

3662.01 Polished Chrome **3662.23** Satin Chrome 3662.26 Dark Bronze



tangent

Ornamentation is created out of the simplicity of geometry. Tangent's bold and strong presence, with its elegantly curved shade, comes from the bracket it is set into and that confidently carries this sleek, uncomplicated form.

3662.26

CONTEMPORARY CLASSICS | SONNEMAN



mercer street

The refined classic art of beveled crystal meets the precisely machined aesthetic of industrial modern in the Mercer Street collection, lighting that defines a place and the sophistication of a downtown attitude.

4281

Mercer Street Pendant

15" H x 5 ¾" w x 5 ¾" D

Shade: Clear Beveled Glass
15" H x 5" w x 5" D

Canopy: 4 ½" sQ w/Hang Straight
Stem Kit: (3) 12" + (1) 6"

Bulb: (1) 60W Medium Base

Shown with 60W T10 Bulb

4281.01 Polished Chrome **4281.25** Satin Black









4282

Mercer Street Double Sconce

16 ¼" H x 8 ¼" W
Shade: Clear Beveled Glass
16 ¼" H x 8 ¼" W x ¼" D
Extension: 4"
Wall Plate: 14" x 6"
Bulb: (2) 60W Medium Base
Shown with 60W T10 Bulb

4282.01 Polished Chrome **4282.25** Satin Black

4280

Mercer Street Sconce

16 ¼" H x 5 ¾" w Shade: Clear Beveled Glass 15" H x 5" w x 5" D Extension: 6" Wall Plate: 16 ¼" x 5 ½" Bulb: (1) 60W Medium Base Shown with 60W T10 Bulb

4280.01 Polished Chrome **4280.25** Satin Black

4285

Mercer Street Surface Mount

4 ½" H x 16 ¾" w x 16 ¾" D Shade: Clear Beveled Glass 4" H x 15 ¾" w x 15 ¾" D Canopy: 14" sQ Bulb: (4) 60W Candelabra Base Shown with available 40W Vintage Carbon Filament T8 Bulb

4285.01 Polished Chrome **4285.25** Satin Black

4281.01











4622.35

4622

Paramount 24" Sconce

24 1/4" H x 6 1/2" W Shade: Metal 24 ¼" H x 6 ½" W Extension: 3 1/2" Wall Plate: 4" x 4 1/2" Bulb: (2) 18W Twin CFL 2G11 Base (included)

4622.35 Polished Nickel

4623

Paramount 23" Pendant

6 1/4" H X 22 3/4" DIA Shade: Metal w/White Glass Diffuser 3 1/4" H X 22 3/4" DIA Canopy: 6" DIA W/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (6) 60W Candelabra Base

4623.35 Polished Nickel

4625

Paramount 23" Semi-Flush

9 1/4" h x 22 3/4" dia Shade: Metal w/White Glass Diffuser 3 ¼" h x 22 ¾" dia Canopy: 6" DIA W/Hang Straight Bulb: (6) 60W Candelabra Base

4625.35 Polished Nickel







4624

Paramount Oval Pendant

3 1/4" H x 36" W x 11" D Shade: Metal w/White Glass Diffuser 3 ¼" н x 36" w x 11" D Canopy: 16" x 5" w/Hang Straight Stem Kit: (6) 12" + (2) 6" Bulb: (6) 60W Candelabra Base

4624.35 Polished Nickel

4628

Paramount 12" Surface Mount

5 ½" н х 12 ½" DIA Shade: Metal w/White Glass Diffuser 3 ¼" H x 12 ½" DIA Canopy: 9 ½" DIA Bulb: (2) 60W Medium Base

4628.35 Polished Nickel

4629

Paramount 16" Surface Mount

5 ½" н х 16 ½" DIA Shade: Metal w/White Glass Diffuser 3 ¼" h x 16 ½" dia Canopy: 14" DIA Bulb: (3) 60W Medium Base

4629.35 Polished Nickel





1880

8" H x 16" W

Extension: 4"

ADA

Wall Plate: 8" x 10"

Dianelli Shield Sconce

8" H x 16" W x 4" D

Shade: Metal w/White Acrylic Diffuser

Bulb: (2) 60W Candelabra Base

1880.24 Rubbed Bronze



dianelli

1881

Dianelli Sconce

21" H x 16" w
Shade: Metal w/White Acrylic Diffuser
8" H x 16" w x 4" D
Extension: 4"
Wall Plate: 8" x 10"
Bulb: (2) 60W Candelabra Base
ADA

1881.24 Rubbed Bronze **1881.35** Polished Nickel

Fluorescent Special Order: (2) 13W SBCFL GU24 Base

1881.35F Polished Nickel

pannelo

1871

Pannelo 22" Sconce

22" H x 6" w
Shade: Metal
22" H x 6" w x ¾" D
Extension: 3"
Wall Plate: 4 ½" sQ
Bulb: (2) 18W Twin CFL 2G11 Base (included)
ADA

1871.13F Satin Nickel



velo

3186


Velo 28" Pendant

11" H x 29" DIA
Shade: White Glass w/Clear Edge
11" H x 28" DIA
Canopy: 6" DIA w/Hang Straight
Stem Kit: (3) 12" + (1) 6"
Bulb: (4) 75W Medium Base

3186.01 Polished Chrome





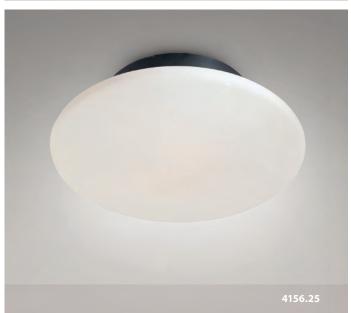



pan

4159

Pan 14 1/2" Surface Mount

4 ½" h x 14 ½" dia Shade: White Etched Cased Glass, 2 ½" H x 14 ½" DIA Canopy: 11½" DIA Bulb: (3) 60W Medium Base

4159.13 Satin Nickel **4159.25** Satin Black

saturn mushroom

4156

Saturn 14" Surface Mount 4 ½" h x 14" dia

Shade: White Etched Cased Glass, 2 ½" H x 14" DIA Canopy: 8" DIA Bulb: (2) 60W Medium Base

4156.13 Satin Nickel **4156.25** Satin Black

4154

Mushroom 15 1/2" Surface Mount

5" н х 15 ½" DIA Shade: White Etched Cased Glass, 3" H x 15 ½" DIA Canopy: 13" DIA Bulb: (2) 60W Medium Base

4154.13 Satin Nickel

4153

Mushroom 12 1/2" Surface Mount

4 ½" h x 12 ½" dia Shade: White Etched Cased Glass, 2 ½" H x 12 ½" DIA Canopy: 10" DIA Bulb: (2) 60W Medium Base

4153.13 Satin Nickel







wedge

4151

Wedge 14" Surface Mount

4 ½" H x 14" DIA Shade: White Etched Cased Glass, 2 ½" H x 14" DIA Canopy: 8" DIA Bulb: (2) 60W Medium Base

4151.13 Satin Nickel

drum

4157

Drum 8" Surface Mount

6 ½" н х 8" DIA Shade: White Etched Cased Glass, 4 ½" H x 8" DIA Canopy: 6" DIA Bulb: (1) 60W Medium Base

4157.13 Satin Nickel

flange

3742

Flange 12" Surface Mount

5" H X 12" DIA Shade: White Etched Cased Glass, 3" H x 9 1/2" DIA Canopy: 11" DIA Bulb: (2) 60W Medium Base

3742.35 Polished Nickel





Suspended in air with intriguing exposed composition, this contoured etched glass floats below the lights that shine through it to define its sculptural presence. With soft, luminous glass in harmony with the precision of its functional details, the Handkerchief collection provides a sophisticated solution to illuminating situations.

3403

Handkerchief 11" Semi-Flush

10" H x 11" W x 11" D Shade: Etched Glass 10" w x 10" d Canopy: 5 1/2" DIA Bulb: (1) 50W MR16 Halogen GU10 Base (included)

3403.04 Satin Silver





3681

Dakota Rectangle Sconce

14 ½" H x 7" W Shade: Etched Glass 13" H x 7" W Extension: 4" Wall Plate: 4 1/2" x 9" Bulb: (2) 60W Candelabra Base

3681.01 Polished Chrome **3681.13** Satin Nickel

Fluorescent Special Order: 3681.13F Satin Nickel

dakota

3680

Dakota Surface Mount 5" H x 19" W x 19" D Shade: Etched Glass 16" w x 16" d Canopy: 11" sq Bulb: (4) 40W Candelabra Base

3680.01 Polished Chrome **3680.13** Satin Nickel

3681.13

CONTEMPORARY CLASSICS | SONNEMAN®







haiku

2539

Haiku 12" LED Square Surface Mount 5" H × 12" W × 12" D Shade: White Glass Canopy: 12" sq LED: 18W, 1600 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2539.13 Satin Nickel 2539.35 Polished Nickel

2536

Haiku 8" LED Round Surface Mount

4 ¾" H X 8" DIA Shade: White Glass Canopy: 8" DIA LED: 13W, 1200 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2536.13 Satin Nickel

2537

Haiku 12" LED Round Surface Mount

5" h x 12" dia Shade: White Glass Canopy: 12" DIA LED: 13W, 1200 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

2537.13 Satin Nickel







votivo

3413

Votivo 3-Light Bath Bar

5 ½" H x 21" w Shade: Clear Glass 4" H x 4" DIA Inner Shade: White Etched Cased Glass Extension: 5 1/2" Wall Plate: 4 1/2" sq Bulb: (3) 50W Xenon G9 Base (included)

3413.01 Polished Chrome

3410

Votivo Sconce

5 ½" н х 4 ½" w Shade: Clear Glass 4" H X 4" DIA Inner Shade: White Etched Cased Glass Extension: 5 1/2" Wall Plate: 4 ½" sq Bulb: (1) 50W Xenon G9 Base (included)

3410.01 Polished Chrome

3412

Votivo 2-Light Sconce

5 ½" н х 13" w Shade: Clear Glass 4" h x 4" dia Inner Shade: White Etched Cased Glass Extension: 5 1/2" Wall Plate: 4 1/2" sq Bulb: (2) 50W Xenon G9 Base (included)

3412.01 Polished Chrome





A semi-cylindrical shield is set within a precise rectangular edge and anchored by a circular plate in Scudo, a minimal modern sconce that radiates bright illumination from its LED source. Combining sleek geometric forms in contrasting textures adds smart sophistication in a modern mood.

1727

Scudo LED Sconce

8" H x 7" w Shade: White Etched Glass 6" H x 7" W x 2 ½" D Extension: 4" Wall Plate: 5 1/2" DIA LED: 9W, 800 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

1727.16 Bright Satin Aluminum **1727.98** Textured White







2450.01

double arc

2450

Double Arc LED Sconce

6 34" H x 6" W Shade: White Etched Glass 5" H X 5" W X 1" D Extension: 3 1/4" Wall Plate: 5 1/2" x 4 1/2" LED: 5W, 360 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection. Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

2450.01 Polished Chrome

2452

Double Arc LED Tall Sconce

12 ½" н x 6" w Shade: White Etched Glass 11" H x 5" W x 1" D Extension: 3 1/4" Wall Plate: 11 1/4" x 5" LED: 11W, 720 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection. Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent ADA

2452.01 Polished Chrome











oceana

3879

wave

Wave Surface Mount

3 ½" н x 11¾" w x 12 ½" D Shade: White Etched Glass 1¾" H X 11¾" W X 12 ¼" D Canopy: 12 1/4" x 5 1/2" Bulb: (4) 60W Candelabra Base

3879.01 Polished Chrome

3876

Wave Square Sconce

7¾"нх8"w Shade: White Etched Glass 7 ½" н x 8" w x 1½" d Extension: 3" Wall Plate: 7 3/4" x 4 1/2" Bulb: (2) 40W Xenon G9 Base (included)

3876.13 Satin Nickel

3871

Wave 1-Light LED Sconce

5 ¼" н х 8" w Shade: White Etched Glass 5" H X 8" W X 1½" D Extension: 3" Wall Plate: 5 1/4" x 4 1/2" LED: 5W, 360 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

3871.01LED Polished Chrome **3871.13LED** Satin Nickel

3912

Oceana 29" LED Bath Bar

5½" н x 29" w Shade: White Etched Glass 5 ½" н x 14" w x 1 ¾" D Extension: 3" Wall Plate: 5" x 28 1/2" LED (2): 18W total, 1600 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent ADA

3912.13LED Satin Nickel

3913

Oceana 44" LED Bath Bar

5 ½" н x 44" w Shade: White Etched Glass 5½"нх14" w x 1 ¾" D Extension: 3" Wall Plate: 5" x 43 1/2" LED (3): 26W total, 2400 Lumens Warm White (3000K), 80 CRI 120VAC Input w/Surge Protection Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

ADA

3913.13LED Satin Nickel





sottile

1812

Sottile Sconce

16" н x 5" w Shade: Silk Shantung 6" H X 5" DIA Extension: 6 1/2" Wall Plate: 15 1/2" x 4 1/2" Bulb: (1) 60W Candelabra Base

1812.35K Polished Nickel w/Black Shade **1812.35W** Polished Nickel w/White Shade



1812.35W

curva

1825

Curva Sconce

19" н х 5" w Shade: Silk Shantung 6" H x 5" DIA Extension: 6 1/2" Wall Plate: 15 1/2" x 4 1/2" Bulb: (1) 60W Candelabra Base

1825.13W Satin Nickel w/White Shade **1825.35K** Polished Nickel w/Black Shade **1825.35W** Polished Nickel w/White Shade



1825.35W



4920

High Line Sconce

9 ½" н x 4 ½" w Shade: White Etched Cased Glass 8" h x 3 ½" dia Extension: 5 1/2" Wall Plate: 6" x 4 1/2" Bulb: (1) 60W Candelabra Base

4920.13 Satin Nickel 4920.35 Polished Nickel

high line

High Line is an urban park cut from the abandoned 1860 rail line in the meat-packing district of Downtown New York. The project has integrated cultural attractions with revisionist and modern architecture that redefines the old as new again. High Line connects the historical to the modern idiom, in a rhythmic construction of structural form.

4920.13





Scala is a contemporary expression of architectural deco. The Chrysler Building's iconic deco geometry is experienced in the hexagon forms and in the vivid and gleaming stepped bracket and bold back plate. In ideal contrast: the soft and milky translucent beauty of the tall, handblown opal cased glass, itself a deco reference. Scala enhances a high-style message of an architecturally designed space.

1835

Scala Sconce

15" н x 4 ½" w Shade: White Etched Cased Glass 9" h x 4" dia Extension: 5 1/2" Wall Plate: 15" x 4 1/2" Bulb: (1) 75W Medium Base

1835.35 Polished Nickel





embassy

2470

Embassy 1-Light LED Sconce Shade: Off-White Cotton 4 ½" H X 4 ¼" DIA Extension: 5 ½" Wall Plate: 4 ½" sq LED: 5W, 400 Lumens Warm White (3000K), 80 CRI 120VAC input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2470.13 Satin Nickel 2470.35 Polished Nickel



candle plus

3025

Candle Plus LED Pendant

14 ½" h x 2 ¾" dia Shade: White Etched Cased Glass 8 ½" h x 2 ¾" dia Canopy: 5" DIA w/6' Adjustable Cord LED: 5W, 360 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

3025.01 Polished Chrome 3025.13 Satin Nickel

3027

Candle Plus LED Long Pendant

17" h x 2 ¾" dia Shade: White Etched Cased Glass 11" h x 2 ¾" dia Canopy: 5" DIA w/6' Adjustable Cord LED: 5W, 360 Lumens Warm White (3000K), 80 CRI 120VAC Input w/12VAC Transformer Dimmable by Electronic Low Voltage (ELV)

3027.01 Polished Chrome 3027.13 Satin Nickel

3031

Candle Sconce

14 ½" н x 5" w Shade: White Etched Cased Glass 8 ½" h x 3" dia Extension: 4 1/2" Wall Plate: 5" DIA Bulb: (1) 60W Candelabra Base

3031.01 Polished Chrome 3031.13 Satin Nickel

3030

Candle 1-Light Pendant

14 ½" н x 3 ½" dia Shade: White Etched Cased Glass 8 ½" h x 3" dia Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 60W Candelabra Base

3030.01 Polished Chrome 3030.13 Satin Nickel

3034

Candle 3-Light Round Pendant

14 ½" H x 10" DIA Shade: White Etched Cased Glass 8 ½" h x 3" dia Canopy: 10" DIA w/10' Adjustable Cords Bulb: (3) 60W Candelabra Base

3034.13 Satin Nickel





candela

glass pendants

3562

Glass Pendants—Tall Cone

16 1/2" H x 9" DIA
Shade: White Etched Cased Glass
10" H x 9" DIA
Canopy: 5" DIA w/10' Expanded Braided Cord

Bulb: (1) 60W Medium Base

3562.01K Polished Chrome w/Black Cord

3560

Glass Pendants—Cylinder

17 ½" H x 6" DIA
Shade: White Etched Cased Glass
11" H x 6" DIA
Canopy: 5" DIA w/10' Expanded Braided Cord
Bulb: (1) 60W Medium Base

3560.01K Polished Chrome w/Black Cord

3565

Glass Pendants-Demi Oval

11½" H x 7 ½" DIA Shade: White Etched Cased Glass 5" H x 7 ½" DIA Canopy: 5" DIA w/10' Expanded Braided Cord Bulb: (1) 60W Medium Base

3565.01K Polished Chrome w/Black Cord

3553

Candela Tapered Pendant

15" H x 3 ½" DIA
Shade: White Etched Cased Glass
8½" H x 3" DIA
Canopy: 5" DIA W/10' Adjustable Cord
Bulb: (1) 60W Candelabra Base

3553.13 Satin Nickel

3551

Candela Torpedo Pendant

16" H x 3 ½" DIA
Shade: White Cased Glass
9 ¼" H x 3" DIA
Canopy: 5" DIA w/10' Adjustable Cord
Bulb: (1) 60W Candelabra Base

3551.13 Satin Nickel





When a white glass tube is offset against a polished nickel rod to form a slender and dramatic vertical column of illumination—Piccolo. Perfect alongside a mirror or door, Piccolo fits wherever you want to define verticality and ultra sophistication in a modern space.

3841

Piccolo Sconce

24" H x 4 ½" W
Shade: White Etched Cased Glass
14" H x 3" DIA
Extension: 4"
Wall Plate: 6" x 4 ½"
Bulb: (3) 35W Xenon G9 Base (included)
ADA

3841.35 Polished Nickel





ombra

1861

Ombra Sconce

11" H x 16" w Shade: Off-White Linen 5" H x 16" w x 4" D Extension: 4" Wall Plate: 11" x 5" Bulb: (2) 60W Candelabra Base **ADA**

1861.13 Satin Nickel

tandem

4521

Tandem Sconce

23" H x 9" w Shade: Black Mesh on White Cotton 10" H x 9" w x 4" D Extension: 4" Wall Plate: 7" x 5 1/4" Bulb: (2) 60W Candelabra Base

4521.25 Satin Black





PENDANTS

Puri's delicate, transparent wisp of organza silk floats on captured air and is surrounded by the softly diffused illumination of an off-white linen shade.

6001

Puri 3-Light Bar Pendant

7" H x 48" w x 14" D
Shade: Organza
5" H x 14" DIA
Inner Shade: Off-White Linen
w/White Glass Diffuser
Canopy: 22" x 4 ½" w/Hang Straight

Stem Kit: (6) 12" + (2) 6" Bulb: (6) 60W Medium Base

6001.13 Satin Nickel w/Silver Shade

6020

Puri 30" Pendant 6 ½" H X 30" DIA

Shade: Organza 6 ½" H x 30" DIA Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 5" DIA w/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (6) 60W Medium Base

6020.13 Satin Nickel w/Silver Shade **6020.51** Black Brass w/Bronze Shade

6021

Puri 16" Pendant

5" H x 16" DIA Shade: Organza 5" H x 16" DIA Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 5" DIA w/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (3) 60W Medium Base

6021.13 Satin Nickel w/Silver Shade

6022

Puri 22" Pendant 6" H X 22" DIA

Shade: Organza 6" H x 22" DIA Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 5" DIA w/Hang Straight Stem Kit: (3) 12" + (1) 6" Bulb: (3) 60W Medium Base

6022.13 Satin Nickel w/Silver Shade6022.51 Black Brass w/Bronze Shade











6006

Puri 5" Cylinder Pendant

18" h x 5" dia Shade: Organza 13" H x 5" DIA Inner Shade: Off-White Linen Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 18W SBCFL GU24 Base

6006.13F Satin Nickel w/Silver Shade 6006.51F Black Brass w/Bronze Shade 6007

Puri 8" Cylinder Pendant

17" H X 8" DIA Shade: Organza 13" H x 8" DIA Inner Shade: Off-White Linen Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 18W SBCFL GU24 Base

6007.51F Black Brass w/Bronze Shade 6008

Puri 10" Pendant

12" H X 10" DIA Shade: Organza 7" h x 10" dia Inner Shade: Off-White Linen Canopy: 5" DIA w/10' Adjustable Cord Bulb: (1) 13W SBCFL GU24 Base

6008.13F Satin Nickel w/Silver Shade 6008.51F Black Brass w/Bronze Shade 6014

Puri 22" Surface Mount

7" h x 22" dia Shade: Organza 6" н x 22" dia Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 10" DIA Bulb: (3) 18W SBCFL GU24 Base

6014.13F Satin Nickel w/Silver Shade **6014.51F** Black Brass w/Bronze Shade

Incandescent (Special Order): (3) 60W Medium Base

6014.13 Satin Nickel w/Silver Shade **6014.51** Black Brass w/Bronze Shade 6013

Puri 16" Surface Mount

6" H X 16" DIA Shade: Organza 5" H X 16" DIA Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 10" DIA Bulb: (2) 18W SBCFL GU24 Base

6013.13F Satin Nickel w/Silver Shade

Incandescent (Special Order): (2) 60W Medium Base

6013.13 Satin Nickel w/Silver Shade **6013.51** Black Brass w/Bronze Shade SURFACE MOUNTS

6011

Puri 10" Surface Mount

8" H X 10" DIA Shade: Organza 7" H X 10" DIA Inner Shade: Off-White Linen w/White Glass Diffuser Canopy: 8" DIA Bulb: (1) 13W SBCFL GU24 Base

6011.13F Satin Nickel w/Silver Shade









SCONCES

6004

Puri Sconce

10 ½" H x 6" W Shade: Organza 8" H X 6" DIA Inner Shade: Off-White Linen Extension: 7 1/2" Wall Plate: 5" DIA Bulb: (1) 13W SBCFL GU24 Base

6004.51F Black Brass w/Bronze Shade

6017

Puri ADA Sconce

16" н x 7" w Shade: Organza 16" H x 7" W x 4" D Inner Shade: Off-White Linen Extension: 4" Wall Plate: 14" x 4 1/2" Bulb: (2) 18W Twin CFL 2G11 Base (included)

6017.13F Satin Nickel w/Silver Shade **6017.51F** Black Brass w/Bronze Shade

6018

Puri ADA Horizontal Sconce

6" H x 16" W Shade: Organza 6" H x 16" W x 4" D Inner Shade: Off-White Linen Extension: 4" Wall Plate: 5" x 12" Bulb: (2) 13W Twin CFL 2Gx7 Base (included)

6018.13F Satin Nickel w/Silver Shade

2482

Ring Shade 22" LED Pendant $5" \text{ H} \times 22" \text{ DIA}$ Shade: Off-White Linen 5" h x 22" dia Canopy: 5" DIA W/6' Adjustable Cable LED: 45W, 2700 Lumens Warm White (3000K), 90 CRI 120VAC Input w/12VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2482.03 Satin White

2484

Ring Shade 32" LED Pendant

5" H X 32" DIA Shade: Off-White Linen 5" h x 32" dia Canopy: 5" DIA W/6' Adjustable Cable LED: 64W, 3750 Lumens Warm White (3000K), 90 CRI 120VAC Input w/24VAC Transformer in Outlet Box Dimmable by Electronic Low Voltage (ELV)

2484.03 Satin White



2482.03









montana

4436

Montana Tall Sconce

18 ½" н x 7" w Shade: Off-White Linen 6" H x 7" W x 3 ½" D Extension: 5" Wall Plate: 15" x 5" Bulb: (1) 60W Candelabra Base

4436.13 Satin Nickel 4436.32 Black Bronze

478

4435

Montana Sconce 13" н x 7" w Shade: Off-White Linen 6" H x 7" W x 3 ½" D Extension: 5" Wall Plate: 7" x 5" Bulb: (1) 60W Candelabra Base

4435.32 Black Bronze

staffa

4431

Staffa 16" Sconce

10" н x 16" w Shade: Off-White Linen 7" H x 16" W x 3" D Extension: 4" Wall Plate: 10" x 16" Bulb: (4) 60W Candelabra Base ADA

4431.30 Rose Bronze

4430

Staffa 8" Sconce

10" н x 8" w Shade: Off-White Linen 7" H X 8" W X 3" D Extension: 4" Wall Plate: 10" x 8" Bulb: (2) 60W Candelabra Base ADA

4430.13 Satin Nickel **4430.30** Rose Bronze





6120

Cubo Sconce

11½" H x 6" W Shade: Off-White Linen 8" H X 6" W X 6" D Extension: 7 1/2" Wall Plate: 6" x 4 1/2" Bulb: (1) 75W Medium Base

6120.43 Natural Brass & Black

cubo


6122

Cubo Largo Sconce

14" н х 5" w Shade: Off-White Linen 10" н x 5" w x 5" D Extension: 7" Wall Plate: 6" x 4 1/2" Bulb: (1) 75W Medium Base

6122.43 Natural Brass & Black

CONTEMPORARY CLASSICS | SONNEMAN®

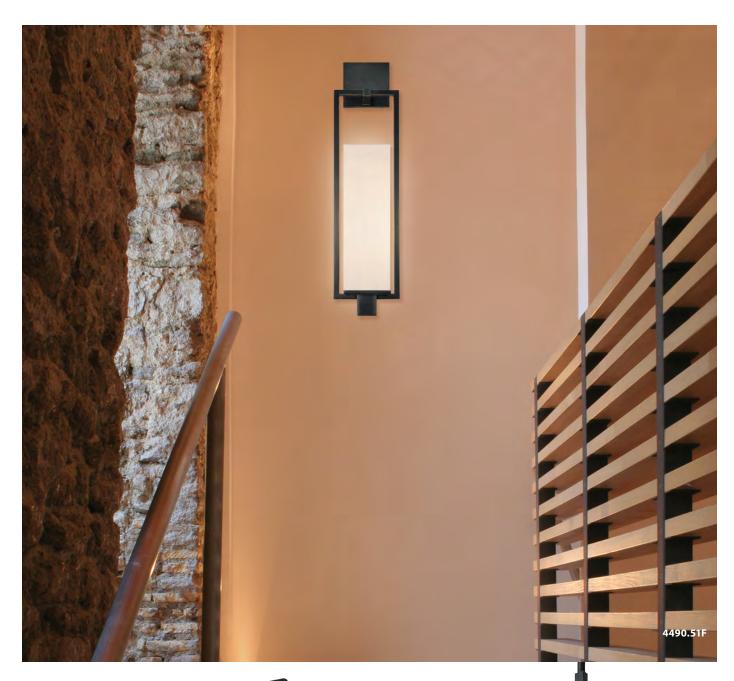

metro

4490

Metro Sconce

24" н х 6" w Shade: Off-White Linen 13" н х 4" w х 4" D Extension: 5 1/2" Wall Plate: 4 1/2" sq Bulb: (1) 18W SBCFL GU24 Base

4490.51F Black Brass



4491

4491.51F Black Brass



4490.51F



4491.51F



linea

Modern sensibilities of bold surfaces, strong geometric architecture, clean lines, and neutral colors



Linea Tall Sconce 13 ½" H x 5" W Shade: Off-White Linen 5 ½" н x 5" w x 3 ½" D Extension: 4" Wall Plate: 5" x 4 1/4"

Bulb: (1) 60W Candelabra Base

4441.32 Black Bronze **4441.35** Polished Nickel

4441.32









hanover

3312

Hanover Banquette Lamp

12 ½" н x 24" w x 6" D Shade: Off-White Linen 8" H X 24" W X 5 ½" D Base: 14" x 6" Switch: High/Low In-Line Cord Switch Bulb: (2) 60W Medium Base

3312.50 Black Nickel **3312.51** Black Brass

3383

Hanover Large Sconce

12 ½" H x 24" W Shade: Off-White Linen 8" H X 24" W X 5 1/2" D Extension: 6 1/2" Wall Plate: 5" sq Bulb: (2) 60W Medium Base

3383.51 Black Brass

3384

Hanover Small Sconce

10 ½" н x 18" w Shade: Off-White Linen 6" H X 18" W X 5 ½" D Extension: 6 1/2" Wall Plate: 5" sq Bulb: (2) 60W Candelabra Base

3384.51 Black Brass





7026

Mitra Compact Swing Right Wall Lamp

8 ½" н x 14" w Shade: Off-White Linen 5" H x 14" W x 4" D w/180° Shade Rotation Extension: 6 1/2"-16 1/2" Wall Plate: 10" x 5" Switch: On/Off Turn Switch Bulb: (1) 10W LED Bulb, GU24 Base (not included) Pin-up w/(2) 12" Cord Covers

7026.13F Satin Nickel **7026.51F** Black Brass

7027

Mitra Compact Swing Left Wall Lamp

8 ½" н x 14" w Shade: Off-White Linen 5" н х 14" w х 4" р w/180° Shade Rotation Extension: 6 1/2"-16 1/2" Wall Plate: 10" x 5" Switch: On/Off Turn Switch Bulb: (1) 10W LED Bulb, GU24 Base (not included) Pin-up w/(2) 12" Cord Covers

7027.13F Satin Nickel

mitra

A luminous rectilinear shade floats on a crisply mitered rectangular arm, set on the minimal plane. Mitra's presence is "quietly there." It defines a high level of sophistication set against a transitional theme or in a contemporary space.







Verso is pure with a delicate beauty in a simple, functional form. One slim, precise swing arm pivots at a single point and rises high to float an elongated and softly luminous linen shade. It provides ideally distributed light for reading and tasks, and a serene mood. Verso adds sophisticated punctuation to modern living spaces.

4445

Verso Sconce

18" H x 7" w Shade: Off-White Linen 9" н x 7" w x 7" p Extension: 12 ¾" w/180° Rotation Wall Plate: 7" x 5" Bulb: (1) 60W Medium Base **4445.13** Satin Nickel





1821

Cappio Sconce Shade: Off-White Linen 6 ½" н x 5 ½" w x 3 ½" D Extension: 6" Wall Plate: 5" x 4 1/2" Bulb: (1) 60W Candelabra Base

1821.13 Satin Nickel **1821.35** Polished Nickel

cappio

Cappio, Italian for "loop," is a transitional concept simply formed and classically present. Cappio's trapezoidal linen shade sets comfortably on its elegantly simple sweep.

CONTEMPORARY CLASSICS | SONNEMAN°



intermezzo

Intermezzo is defined by expressive sculptural forms. A sleekly curved, luminous plane is a counterpoint to the bold lines of the frame that celebrates their structural construct with a simple ball connection. Intermezzo brings cultivated style and presence to your modern space.

1833

Intermezzo Sconce 13" H x 7" W Shade: Off-White Linen 7" H X 7" W X 3 ½" D Extension: 4" Wall Plate: 5" DIA Bulb: (1) 60W Candelabra Base ADA

1833.24 Rubbed Bronze **1833.35** Polished Nickel





4674.03



4674

V LED Torchiere 70 ½" H x 14" W x 10" D Shade: Metal 1 ½" н х 9" w х 10" D Base: 14" х 9" Switch: Floor Dimmer LED: 33W, 2600 Lumens Warm White (3000K), 80 CRI 120VAC Input

4674.03 Satin White **4674.25** Satin Black

4674.25





4750

Sky Table Lamp 24" H x 24" DIA

Shade: Opaque Paper 5" h x 24" dia Base: 6" DIA Switch: Rotary In-Line Cord Dimmer on Red Silk Covered Power Cord Bulb: (1) 60W Medium Base

4750.87K Clear Glass w/Black Shade **4750.87W** Clear Glass w/White Shade



level

4755

Level Table Lamp 24" H x 19" DIA

Shade: Opaque Paper 6" н х 19" dia Base: 6" DIA Switch: Rotary In-Line Cord Dimmer on Red Silk Covered Power Cord Bulb: (1) 60W Medium Base

4755.87K Clear Glass w/Black Shade **4755.87W** Clear Glass w/White Shade



4775

Vaso Table Lamp

32" H X 18" DIA Shade: Off-White Linen 13 ¾" h x 18" dia Base: 8" DIA Switch: 3-Way Turn Switch Bulb: (1) 150W Medium Base

4775.87K Clear Glass

w/Black Silk Covered Cord **4775.87R** Clear Glass

w/Red Silk Covered Cord

vaso

The Vaso Table Lamp is a clean and versatile take on a classic design. Leave the glass volumes empty for a minimalist aesthetic, or lift the cap to fill these jars with your treasures for a personal touch. Perfect for modern living rooms and bedrooms, Vaso is offered with an off-white linen shade and a choice of red or black silk covered cord with 3-way turn switch.

torii 6170 Torii Floor Lamp 65 ¼" н x 26" DIA Shade: Off-White Linen 8" н x 26" DIA Base: 19" DIA **6170.25** Satin Black





monolith

Monolith's sleek, strong column terminates by its interlocking capital detail. This connection defines the upward thrust to float in air the rectilinear volume of its linen shade. The metal finishes define the volume's serenity, balance, and simplicity, adding poise and sophistication to its space.

3305

Monolith Table Lamp

30" H x 17" W x 9" D Shade: Off-White Linen 11" H x 17" W x 9" D Base: 8" x 5 ½" Switch: 3-Way Turn Switch Bulb: (1) 150W Medium Base

3305.50 Black Nickel **3305.51** Black Brass



lina

Lina answers the need for a lamp that leans over a desk or reading area. The long stem is anchored at the heavy ring base and rises through the shade's inner rim, creating a simple form with optimized reach. A direct solution to placing light where you need it for work or reading, the Lina collection adds smart sophistication, interest, and function to your contemporary space.



7098

Lina Table Lamp

6" H X 16" DIA

Base: 11" DIA

7099.51

23 ½" H x 16" W x 18" D

Shade: Off-White Linen

Switch: 3-Way Pull Chain

7098.13 Satin Nickel

Bulb: (2) 60W Medium Base

7099

Lina Floor Lamp

57" н x 18" w x 24" D Shade: Off-White Linen 7" h x 18" dia Base: 14" DIA Bulb: (2) 60W Medium Base

7099.13 Satin Nickel **7099.51** Black Brass



6105

Virage Table Lamp

31" H x 15" DIA Shade: Off-White Linen 14" н х 15" діа Base: 3 ½" x 4 ¼" Switch: 3-Way Turn Switch Bulb: (1) 150W Medium Base

6105.13 Satin Nickel

virage

With a sensuous, liquid-like presence, Virage's sleek, elongated shape is captured in the glamour and gravitas of nickel, communicating a restrained opulence.







perch

7080

Perch Swing Arm Wall Lamp

13" н x 22 ½" w Shade: White Cotton 5" н х 14" діа w/350° Shade Rotation Extension: 21½" w/180° Arm Rotation Wall Plate: 6" x 4 1/2" Switch: On/Off Turn Switch Bulb: (1) 150W Medium Base Pin-up w/(2) 12" Cord Covers

7080.01 Polished Chrome **7080.13** Satin Nickel **7080.27** Coffee Bronze

7082

Perch Swing Arm Table Lamp

23" H x 24 1/4" W x 14" D Shade: White Cotton 5" н х 14" діа w/350° Shade Rotation Base: 8 ½" DIA Switch: On/Off Turn Switch Bulb: (1) 150W Medium Base

7082.01 Polished Chrome **7082.13** Satin Nickel **7082.27** Coffee Bronze

7083

Perch Swing Arm Floor Lamp

49 ½" н x 25" w x 14" D Shade: White Cotton 5" н х 14" діа w/350° Shade Rotation Base: 10" DIA Switch: On/Off Turn Switch Bulb: (1) 150W Medium Base

7083.01 Polished Chrome **7083.13** Satin Nickel **7083.27** Coffee Bronze





oalo

7009

Palo Wall Lamp

33" H X 9 ½" W

Shade: Off-White Linen
10" H X 9 ½" DIA

Extension: 11"

Wall Plate: 9" X 2" w/Adjustable Position

Switch: 3-Way Turn Switch

Bulb: (1) 150W Medium Base

 7009.13
 Satin Nickel

 7009.35
 Polished Nickel

 7009.38
 Satin Brass

 7009.51
 Black Brass

7008

Palo Floor Lamp

47" – 69" H ADJ. X 14" DIA Shade: Off-White Linen 14" H X 14" DIA Base: 8" X 10" Switch: 3-Way Turn Switch Bulb: (1) 150W Medium Base

7008.13 Satin Nickel 7008.35 Polished Nickel 7008.38 Satin Brass 7008.51 Black Brass





OSSO

3620

Osso Wall Lamp

15" H X14" W
Shade: Off-White Linen
5 ½" H X 14" DIA
Extension: 25 ½" w/350° Arm Rotation
Wall Plate: 8" X 2"
Switch: On/Off In-Line Cord Switch
Bulb: (2) 60W Medium Base
Pin-up

3620.13 Satin Nickel

Osso speaks to the language of rotation, articulated with sleekness. The adjustability occurs by unifying the points of rotation of a round form blending seamlessly into a rectilinear arm. A metal stem rises from the base's rim, maximizing the extension of Osso's luminous drum shade to provide compelling functionality to your workspace or bedside.

Pin-up

thick thin



6426

Thick Thin Floor Lamp 55 ½" H x 19" W x 14 ½" D Shade: White Cotton 10" H x 14 ½" DIA Base: 11" x 8" Switch: On/Off Turn Switch Bulb: (1) 150W Medium Base

6426.01 Polished Chrome 6426.27 Satin Nickel 6426.27 Coffee Bronze

6425

Thick Thin Table Lamp 29" H × 19" W × 14" D Shade: White Cotton 9" H × 14" DIA Base: 9 ½" x 6" Switch: On/Off Turn Switch Bulb: (1) 150W Medium Base

6425.13 Satin Nickel **6425.27** Coffee Bronze



quadratto

Contrasting its heavy vertical stem with the thin profile of the horizontal arm creates a bold structure of visual tension. It supports a wide drum shade that swivels outward when light is needed over a reading area, or swings back into compact containment for a wash of ambient light.

6089

Quadratto Swing Wall Lamp 12 ½" H x 14" W

Shade: Off-White Linen 6" н х 14" діа Extension: 14"-21" Wall Plate: 5" x 4 1/2" Switch: 3-Way Pull Chain Bulb: (2) 60W Medium Base Pin-up w/(2) 12" Cord Covers

6089.13 Satin Nickel



perno

Perno is a smart study of function and counterpoised rotation achieved with weight and balance. Its two arms provide extended reach, with a counterweighted arm directing light where needed. The orbital theme of the arms is echoed by Perno's drum shade. Trim lines and refined forms make Perno a contemporary classic.

7002

Perno Wall Lamp 14" H × 30" W

Shade: Off-White Linen 5" H X 15" DIA Extension: 41" w/180° Rotation Wall Plate: 8" x 3" Switch: On/Off Turn Switch Bulb: (2) 60W Medium Base Pin-up w/(2) 12" Cord Covers

7002.13 Satin Nickel

tenda



7004.13 Satin Nickel



Tenda Pharmacy Floor Lamp

37 1/2" – 46 1/2" H ADJ. X 14 1/2" W X 10" D

Shade: Metal
2" H X 6 1/2" W X 5 1/2" D

Base: 10" DIA

Switch: High/Low Toggle Switch

Bulb: (1) 75W Xenon

G9 Base (included)

7005.13 Satin Nickel 7005.25 Satin Black 7005.30 Rose Bronze

7005.25



orbiter[®]

Among his first and most impactful designs, in 1967 Orbiter defined the modern functional art that became the cornerstone and pathos of Robert Sonneman's life work. A simple arc supports a single boom that moves in balance throughout a hemisphere. Exhibited in museums and galleries, the Orbiter is an uncomplicated machine, so pure in its elements that the art of its simplicity has never been redefined more perfectly in the 50 years of its history.

3331

Orbiter® Wall Lamp

Shade: Metal

3" H X 3 ½" DIA

33 ½" Boom Suspended from 16" Arch Extension: 38" Wall Plate: 4" x 1"

Switch: High/Low In-Line Cord Switch Bulb: (1) 50W MR16 Halogen G5.3 Base (included)

3331.01 Polished Chrome 3331.13 Satin Nickel



arc shade



4097

Arc Shade Floor Lamp

78 ½" – 93 ½" H ADJ. X 66 ½" W X 18" D

Shade: Linen w/White Glass Diffuser,
9" H X 18" DIA

Base: 15" DIA
White Marble Base
Switch: Floor Dimmer

Bulb: (1) 100W Medium Base

4097.13K Satin Nickel w/Black Linen Shade **4097.13W** Satin Nickel w/Off-White Linen Shade



wall

QUICK REFERENCE BY CATEGORY:





suspenders® p. 12



votives® p. 72



waveforms® p. 92

calla™

p. 119



infinity p. 100



p. 106

abstract panels lotus p. 109




p. 116



fontanna

aileron®

p. 160





sideways p. 346



piccolo encore®

p. 334

radiance p. 347

triform

p. 356

p. 365



new edge®

p. 336

glass glow² p. 348

curved shield

p. 359



midtown p. 349



jazz notes

p. 350

reveal

p. 361

p. 368

tab

p. 375

p. 383



flat box® p. 352

p. 362



planes® p. 168

chroma

p. 117



p. 173

ellipses

p. 196

p. 118



fontanna shield p. 188



split disc p. 190

abstract™

p. 120



thin-line®

p. 146

center eclipse p. 191



p. 156

0

corner eclipse p. 191



batten p. 194





box column

p. 355

p. 365

triform compact





p. 366

p. 374

p. 381





cape

p. 375

p. 382


inset

p. 360





p. 370




=

bath notes

p. 296

angled plane p. 195

pluck® p. 214





and the same

crystal rods®

p. 300

p. 226

toma

p. 197





bracket

p. 198

p. 229



wedge LED

p. 199

p. 231

stiletto

p. 306



p. 239

p. 308

dazzle

p. 324

dao

p. 201





light guide ring

p. 207

p. 292

champagne wands



p. 385



chamfer

p. 372

shear



p. 381

angled plane

p. 373









p. 384

p. 376





stix plus p. 312



solid glass bar

p. 298



p. 316



p. 320

p. 321















round column® p. 407

atelier p. 415

508

wall



p. 419



urban edge™ p. 425



p. 427



zylinder p. 428



chelsea p. 432



teardrop p. 435





p. 439



p. 448



p. 168





radiant lines® p. 226



wands p. 229

dazzle

p. 324

midtown

p. 349

delano

p. 442

scudo

p. 458



champagne wands p. 292

bath + vanity





transparence p. 441





p. 443

dakota

p. 455



p. 444

votivo

p. 457



tangent



mercer street



paramount



crystal rods® p. 300

aileron®

p. 162

p. 74

solid glass bar

p. 298



p. 302



stiletto stiletto lungo p. 306 p. 308



QUICK REFERENCE BY CATEGORY:

stix p. 310





p. 450



oceana p. 461



p. 462

ombra

p. 471

p. 481



p. 462

tandem

hanover

p. 482

p. 471



high line p. 463

p. 476





p. 464

montana

pg 478

p. 484

scudo

p. 458



double arc

p. 459

embassy p. 465



candle p. 467

cubo


p. 479

p. 486

p. 504

p. 460





p. 336



glass glow² p. 348

transparence

p. 441

accanto

p. 321



p. 326

REALS p. 388

link

p. 443



zylinder p. 428



p. 470



p. 480



perch pharmacy p. 496





p. 498



p. 499

p. 483







p. 485

p. 502












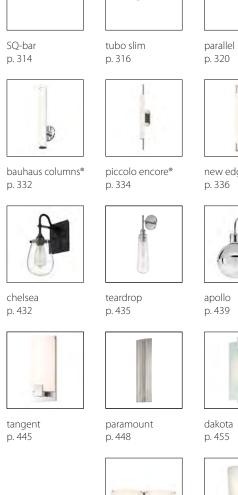

oceana

p. 461



high line

p. 463



p. 464







double arc

p. 459

piccolo

510

bath notes p. 296

stix plus p. 312



bauhaus revisited p. 328





p. 444



p. 460



pendants



p. 12





little cloud® infinity reflections p. 94



kabu corso linear p. 114



p. 140

panels

p. 170

ligh guide ring

p. 202

ALC®

p. 237

stiletto

p. 138

p. 166



planes®



lambda p. 200



light chimes™ p. 232



intervals® p. 26

infinity


corona ring

stix square

p. 142

p. 126

p. 98



constellation® p. 56

abstract rhythms

double corona®

p. 130

p. 102



votives® p. 80

p. 108

quad-Y

p. 134

thin-line®

tromme®

p. 144



tik-tak® p. 82



waveforms® p. 88



p. 110



wave bar® p. 112



bi-Y



p. 136



p. 137



glide™ p. 152

p. 180

p. 230

facets®

p. 260









pi p. 183





ballet™ p. 264

QUICK REFERENCE BY CATEGORY: pendants



p. 416

square ring

(=

p. 423

apollo

p. 438

champagne p. 270 bubbles



tuxedo p. 418

urban edge™

p. 424

castelli

p. 440

candle

p. 467



orb vectors p. 420

tribeca

p. 426

transparence

glass pendants

p. 468

p. 441

p. 286



p. 290

p. 421

zylinder

mercer street

p. 446

candela

p. 469

p. 428



level p. 422



p. 322





bleecker street p. 423



chelsea p. 430



p. 422

p. 434



p. 436



paramount p. 448

puri

pg 472



velo p. 451

p. 477



candle plus





p. 480





float p. 174

counterpoint®

p. 208

mela™

p. 246



stix rectangle

p. 143

torus® p. 176

chromaglo

p. 224

cantina

p. 250





wands

p. 228

liquid

p. 254





micro tube p. 231



512

indoor/outdoor



p. 340



light frames p. 342



p. 344

p. 352

prairie p. 362

p. 370

p. 376



stripe® p. 345



p. 346



p. 347



p. 348



glass glow²




square curve® p. 401



light frames® p. 402



square column® p. 404



round column®

p. 406

triform compact p. 410

QUICK REFERENCE BY CATEGORY:



p. 410

bollards



p. 410



midtown jazz notes p. 349 p. 350





flat box®



p. 354

offset panels®

p. 364

prisma®

p. 371

folds

p. 378



box column p. 355

p. 365

chamfer

p. 372



curved shield p. 359



p. 365

p. 356

triform compact





p. 366

ply p. 374



p. 12



ola™



intervals® p. 26



constellation® p. 56





tik-tak® p. 82



abstract™ p. 120



REALS



p. 360

ridgeline p. 368



p. 361

p. 375











pg 380



p. 381

angled plane p. 373







drift p. 381



square column® p. 404

systems





p. 14





aileron®

p. 160



ALC® p. 236



p. 386



CRCL p. 382

p. 375



SQR p. 383



p. 384



aku p. 385



REALS p. 386




square curve® p. 400



round column® p. 406

flush + semi-flush mounts



suspenders®

p. 192

saturn p. 452



fontanna p. 116

p. 240

pan p. 452



abstract™ p. 120

dazzle

p. 322

mushroom

p. 452



p. 182

REALS

p. 386



puck slim

p. 184

p. 186



fontanna shield



p. 189



p. 448



paramount







p. 453







handerchief p. 454



p. 489

perch p. 497



torii p. 490

palo p. 498

pluck®


p. 218



X-lamp

p. 220

thick thin p. 500



lina

p. 494

V-torch

p. 487

hanover

monolith

p. 492

tenda

p. 503

p. 482

orbiter® p. 505



QUICK REFERENCE BY CATEGORY:


table + floor lamps

p. 506

virage p. 495



perch pharmacy p. 496



p. 507



dakota p. 455



haiku p. 456





p. 460



flange p. 453

p. 475

By Collection

abstract™	120
abstract panels	106
abstract rhythms	102
accanto	321
aileron®	160
aku	385
ALC °	236
angled plane	105 373
apollo	438
arc	507
arc shade	506
atelier	414
В	
ballet™	264
band	354
bath notes	296
batten	194
bauhaus columns	332
bauhaus revisited	328
bi-Y	136
bleecker street	423
box	365, 410
box column	355
bracket	198
bubbles	436
С	
calla™	119
candela	469
candle	467
candle plus	466
cantina	250
cape	
cappio	105
castelli	440
center eclipse	191
chamfer	272
champagne bubbles	282
champagne wands	
chelsea	420
chroma	117
	224
chromaglo*spectrum corner eclipse	

•	
corona ring	126
corso linear	115
counterpoint [®]	208
CRCL	382
crest	366
crystal rods [®]	300
cubo	479
curva	462
curved shield	359
cusp	367
D	
dakota	455
dao	201
dazzle	322
dazzle slim	326
delano	442
dianelli	450
double arc	459
double corona®	130
drift	381
drum	453
E	
elips	381
ellipses	196
embassy	465
Ciribassy	100
F facate*	260
facets®	
flange	453
flat box [®]	352
float	174
folds	378
fontanna	116
fontanna shield	188
G	
gestures	110
•••••	348
glass glow² glass pendants	348 468

270

444

grapes®

greco

haiku	456
handkerchief	454
hanover	482
high line	463
I	
infinity	98
infinity reflections	96
inset	360
intermezzo	486
intervals [®]	26
J	
jazz notes	350
K	
kabu	114
koma	180
L	
l'arc	340
lambda	200
leaf™	118
level	422, 488
light guide ring	202
light chimes™	232
light frames	342, 402
lina 	494
linea	481
liquid	254
link	
little cloud	
lotus	108
M so a lo ^m	
mela [™]	
mercer street	
metro	230
•••••	7.30
micro cone	
micro cone micro tube	231
micro cone micro tube midtown	231 349
micro cone micro tube midtown mitra	231 349 483
micro cone micro tube midtown mitra monolith	231 349 483 492
micro cone micro tube midtown mitra	231 349 483 492

By Collection

N	
nami	384
new edge [®]	336
0	
oceana	
oculus	
offset	
offset panels®	364
ola	14
ombra	471
orb	421
orbiter®	504
orb vectors	420
OSSO	499
_	
Р	
palo	498
pan	452
panels	170
pannelo	450
parallel	320
paramount	448
perch	107
perch pharmacy	
perno	
pi	100
piccolo	470
piccolo encore®	331
planes®	166
pluck [®]	
ply	274
prairie	262
pricm	270
nrisma*	271
1 1	
nuri	472
puri	4/2
Q	
quad-Y	137
a dza++a	FO1
auattro*	220
quattro	

R	<u>.</u>
radiance	347
radiant lines®	226
REALS	386
reveal	361
ridgeline	368
ring shade	177
round column°	406, 409
S	
saturn	452
scala	464
scudo	458
shear®	380, 410
sideways	316
sky	422, 488
soho	116
solid glass bar	298
sottile	462
spire	286
split disc	190
SQ-bar	314
SQR	383
square column°	404, 408
square curve®	400
square ring	423
staffa	478
stiletto	
. 11 1	138, 306
stiletto lungo	308
stiletto lungo stix	308
stix	308
stix plus	308 140, 310 312
stix stix plus	308 140, 310 312 143
stix plus stix rectangle	308 140, 310 312 143
stix plus stix rectangle stix square	308 140, 310 312 143 142
stix stix plus stix rectangle stix square stripe*	308 140, 310 312 143 142 345
stix stix plus stix rectangle stix square stripe* suspenders*	308 140, 310 312 143 142 345
stix stix plus stix rectangle stix square stripe* suspenders*	308 140, 310 312 143 142 345
stix stix plus stix rectangle stix square stripe* suspenders* sword T tab	308 140, 310 312 143 142 345
stix stix plus stix rectangle stix square stripe* suspenders* sword T	308 140, 310 312 143 142 345 12 344
stix stix plus stix rectangle stix square stripe* suspenders* sword T tab	308 140, 310 312 143 142 345 12 344 375 471
stix stix plus stix rectangle stix square stripe* suspenders* sword T tab tandem	308 140, 310 312 143 142 345 12 344 375 471
stix stix plus stix rectangle stix square stripe* suspenders* sword T tab tandem tangent	308 140, 310 312 143 142 345 12 344 375 471 445

thin-line [®]	14
tides	
tik-tak [*]	
toma	
torii	
torus [®]	17
transparence	44
tribeca	42
triform	35
triform compact	365, 41
trinity	29
tromme [®]	17
tubo slim LED	31
tuxedo	41
U	
Urban Edge [™]	42
V	
V-torch	48
vanity	30.
vaso	48
velo	45
verso	48-
virage	49.
votives®	7.
votivo	45
W	
wands	22
wave	16
wave bar [®]	
waveforms®	8
wedge	15
	19
X	
X-lamp	40
Υ	
Υ	13
Z	

INDEX: By Item Number

		IN	DEX:
Ву	ltem	Numb	er

1727	458	2311	128	2501	333
1733	115	2313	128	2502	333
1734	115	2315	129	2503	333
1735	115	2317	129	2536	456
1742	114	2318	129	2537	456
1812	462	2330	308	2539	456
1821	485	2332	308	2540	303
1825	462	2334	308	2541	303
1833	486	2338	309	2542	302
1835	464	2340	307	2543	305
1851	444	2342	307	2544	305
1861	471	2345	139	2545	304
1871	450	2346	139	2550	302
1880	450	2347	139	2554	304
1881	450	2348	138	2557	327
20QKL04B	50	2349	138	2558	327
20QKL04B	50	2351	118	2559	327
20QKE08B	50	2352	153	2560	325
20QKS04B	50	2356	119	2561	325
20QKZ46B	50	2361	373	2562	325
•••••	·······	• • • • • • • • • • • • • • • • • • • •	······································	• • • • • • • • • • • • • • • • • • • •	······································
20QWL04C	51	2362	197	2565	322
20QWL08C	51	2363	373	2566	322
20QWR48C	51	2365	195	2567	322
20QWS04C	51	2366	195	2568	323
20QWZ46C	51	2368	191	2569	323
2050	221	2369	191	2570	173
2052	223	2370	199	2574	172
21Q13-Rx3312	61	2372	198	2575	170
21Q13-Rx5512	61	2375	117	2577	171
21Q13-Rx7712	61	2380	231	2583	111
2151	68	2381	231	2590	298
2152	65	2390	231	2592	298
2155	64	2420	315	2594	299
2158	63	2421	314	2600	225
2181	121	2422	314	2602	224
2182	121	2423	314	2610	296
2183	121	2430	316	2611	296
22QxCL02120PHA	15	2431	316	2612	296
22QxCL03120PHA	14	2432	317	2613	297
22QxCT01120PHA	17	2433	317	2620	175
22QxRL01120PHA	15	2440	319	2622	174
2210	229	2441	318	2630	189
2211	229	2442	319	2632	116
2212	229	2443	318	2640	109
2250	292	2450	459	2643	108
2251	292	2452	459	2645	108
2252	293	2470	465	2650	207
2253	292	2482	477	2651	207
2255	293	2484	477	2652	206
2303	133	2490	331	2653	206
2305	133	2491	329	2654	204
2307	133	2492	328	2655	204
2309	132	2493	329	2656	203
	•••••••••••••••••••••••••••••••••••••••		······································		•••••••••••••••••••••••••••••••••••••••

2660	101	2770	311	2848	219
2662	101	2771	311	2850	78
2665	99	2772	311	2852	78
2666	99	2773	137	2853	77
2667	97	2774	136	2854	77
2668	97	2775	135	2855	74
2669	······································	2780	201	2857	
2670	97	2785	142	2858	81
2671	93 93	2786	142	2859	81 81
2673	90	2787	142	2862	179
2674	90	2788	143	2863	179
2675	······································	2789	············	2864	179
	89		143	• • • • • • • • • • • • • • • • • • • •	······································
2676	89	2790	312	2865	178
2680	169	2791	312	2870	177
2682	168	2792	313	2872	177
2683	168	2794	313	2883	209
2684	168	2801	84	2884	213
2686	167	2802	85	2886	211
2688	167	2803	83	2893	267
2690	107	2804	85	2894	265
2692	107	2805	85	2895	267
2694	107	2806	82	2896	265
2695	103	2810-3	148	2897	269
2696	103	2810-4	148	2910	278
2697	105	2810-6	149	2911	278
2700	165	2810-8	149	2912	278
2702	165	2812-3	148	2913	273
2704	165	2812-4	148	2914	273
2710	379	2812-6	149	2915	273
2711	379	2812-8	149	2916	273
2712	375	2814-3	148	2917	273
2714	370	2814-4	148	2918	273
2716	372	2814-6	149	2920	273
2718	196	2814-8	149	2921	273
2720	190	2816-3	145	2922	273
	194	2816-4	145	2923	273
 2724	349	2816-6	144	2940	288
2725	349	2816-8	144	2941	288
2727	193	2818-3	145	2942	288
2729	193	2818-4	145	2947	289
2730	200	2818-6	144	2948	289
2730 2732		2818-8	144	2950	
2740	95	2820	······································	2950	291
	183		113		291
2742	183	2822	113	2952	291
2745	182	2832	156	2961	284
2746	182	2833	157	2962	284
2747	182	2835	158	2963	284
2750	180	2837	155	2964	285
2752	180	2838	155	2965	285
2754	180	2839	154	2966	285
2763	140	2842	216	2970	257
2766	140	2844	217	2971	257
2769	311	2846	219	2973	256

INDEX: By Item Number


		INDEX:
Ву	Item	Number

2975	259	3383	482	4096	507
2976	259	3384	482	4097	506
2977	259	3403	454	4151	453
2980	255	3410	457	4153	452
2981	255	3412	457	4154	452
2990	250	3413	457	4156	452
2995	253	3551	469	4157	453
2996	253	3553	469	4159	452
2997	253	3560	468	4280	447
3001	262	3562	468	4281	446
3003	263	3565	468	4282	447
3005	263	3620	499	4285	447
3010	321	3662	445	4286	432
3011	321	3680	455	4287	433
3012	321	3681	455	4288	433
3015	233	3690	442	4289	433
3016	233	3715	443	4290	432
3017	233	3716	443	4291	430
3018	234	3718	443	4293	431
3019	234	3723	185	4294	430
3025	466	3724	185	4295	431
3027	466	3725	185	4391	428
3030	467	3730	187	4394	428
3031	467	3731	187	4395	429
3034	467	3732	187	4399	429
3050	238	3742	453	4430	478
3050	239	3760	436	4431	478
3052	239	3761	436	4435	478
3053	239	3762	437	4436	478
3055	238	3763	437	4441	481
3056	238	3765	437	4445	484
3057	237	3768	436	4490	480
3058	237	3797	337	4491	480
3059	237	3798	337	4521	471
3060	241	3799	337	4540	415
3061	240	3802	301	4546	415
3062	240	3803	300	4548	415
3063	240	3805	300	4591	421
3064	240	3810	226	4595	420
3066	241	3812	226	4598	421
3067		3841	470	4599	420
3068	241	3842	335	4622	448
3071	241	3860	320	4623	448
3072	246	3871	460	4624	440
3073	246	3876	······································	4625	······································
3074	246		460	***************************************	448
	248	3879 3912	460	4628	449
3186	451	***************************************	461	4629 4660	449
3294	440	3913	461		491
3305	492	4011	423	4674	487
3306	493	4060	419	4750	488
3312	482	4062	419	4751	422
3330	505	4065	419	4755	488
3331	504	4066	418	4756	422

4761	423	7083	497	7289	351
4775	489	7085	496	7300	390
4780	439	7088	496	7302	388
4781	439	7098	494	7303	396
4800	441	7099	494	7304	396
4801	441	7100	371	7305	396
4802	441	7102	371	7306	397
4840	434	7105	352	7307	397
4841	435	7106	352	7308	397
4843	435	7107	352	7309	387
4920	463	7108	353	7311	410
4930	427	7110	364	7312	410
4931	427	7113	345	7312	410
4932	426	7115	345		•••••••••••••••••••••••••••••••••••••••
4933	426	7200	343	7315 7316	411
4941	424	7202	342		411
4942	425	7204	343	7317	411
4943	425	7210		7320	365
4944		7214	382	7321	410
4945	424	7216	383	7322	410
•••••	425	•••••	385	7323	410
4950	417	7218	384	7325	411
4951	417	7220	381	7326	411
4953	417	7222	380	7327	411
6001	472	7223	380	7330	358
6004	476	7226	367	7332	357
6006	474	7228	366	7333	357
6007	474	7230	374	7334	357
6008	474	7232	375	7340	365
6011	475	7234	369	7341	410
6013	475	7236	376	7342	410
6014	475	7237	377	7343	410
6017	476	7238	381	7345	•••••••••••••••••••••••••••••••••••••••
6018	476	7239	381	•••••	411
6020	472	7240	344	7346	411
6021	473	7243	341	7347	411
6022	473	7245	341	7352	355
6089	501	7250	347	7354	355
6105	495	7252	347	7360	400
6120	479	7254	346	7361	401
6122	479	7256	346	7362	401
6170	490	7260	359	7363	401
6425	500	7264	361	7365	403
6426	500	7265	361	7366	403
7002	502	7266	361	7367	403
• • • • • • • • • • • • • • • • • • • •		•••••		7370	407
7004	503	7267	360	7371	409
7005	503	7270	363	7372	409
7008	498	7272	363	7373	407
7009	498	7275	348	7380	405
7026	483	7280	354	7381	403
7027	483	7282	354	• • • • • • • • • • • • • • • • • • • •	
7080	497	7284	354	7382	408
7082	497	7287	351	7383	405

ABOUT

ROBERT SONNEMAN

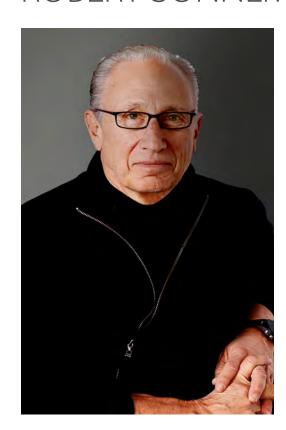

Award winning and acclaimed for clean lines and innovative approaches, Robert Sonneman, "Lighting's Modern Master," pioneered modern lighting in the 1960s and '70s, making it an art form. Many of Sonneman's sleek, functionalist lighting designs have become classics of the Modern era. Robert's functional sensibilities and prolific design vocabulary has grown over his fifty-year career to include a unique perspective of Modernism that extends through the architectural genres and Modernist movements of the 20th and 21st centuries. His designs have been exhibited internationally in museums, galleries, and design shows over the last five decades.*

Today SONNEMAN has moved entirely to LED, electronic illuminating technology, with an extensive product line of over 2,000 products, developing over 100 new designs annually. Integrating technology-driven design with form and function in innovative ways creates the dramatic modern design that makes... SONNEMAN – A Way of Light.

"I am curious and challenged and excited to discover the odyssey that is design. I am driven by what's next."

– Robert Sonneman

*Additional Background

Robert Sonneman's works have been exhibited in the Museum of Modern Art, New York; Cooper-Hewitt Museum, New York; the Contemporary Art Museum, Houston; the Chicago Museum of Science and Industry; the Krannert Art Museum at the University of Illinois, Urbana-Champaign; the Philadelphia Museum of Art; St. Louis Design Center; the Southwest Museum of Science and Technology; and the Saskatchewan Science Museum, Canada.

As an active contributor to design education as a guest lecturer and critic, he has served on the Advisory Boards of the Pratt School of Architecture, Parsons School of Design, and the Art Center College of Design. In addition, Robert Sonneman has participated in the Stanford Forum on Design and served on the advisory board of the Nissan Motor Corp. Sonneman is the recipient of many honors for his innovative work including the Red Dot Design Award, ASID Top Pick Award, Architizer A+ Award, NYC&G Innovation in Design Award, Best of BDNY Product Design Award, Metropolis Likes Award, Architectural Digest (AD) Great Design Award, Interior Design BOY Award, The Chicago Athenaeum's Good Design Award, LIT Lighting Design Award, LFI Innovation Award, darc Decorative Award, and Hospitality Design (HD) Award.



SONNEMAN – A WAY OF LIGHT P.O. Box 394 Wappingers Falls, New York 12590 P. 845.926.5469 F. 845.565.8930

e-mail: csr@sonnemanawayoflight.com www.sonnemanawayoflight.com





Copyright ©2019 SONNEMAN – A WAY OF LIGHT

